

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 6307772 (S/N 1112) Component

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | May2022 | Feb2024 | | |
|------------------|----------|--------------|------------|-------------|-------------|----------|
| SAMPLE INFORM | ΛΑΤΙΟΝ | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA011866 | KCP50814 | |
| Sample Date | | Client Info | | 20 Feb 2024 | 16 May 2022 | |
| Machine Age | hrs | Client Info | | 17174 | 12562 | |
| Oil Age | hrs | Client Info | | 0 | 3000 | |
| Oil Changed | | Client Info | | N/A | Changed | |
| Sample Status | | | | NORMAL | ABNORMAL | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 0 | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | |
| Nickel | ppm | ASTM D5185m | >3 | 0 | <1 | |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | |
| Silver | ppm | ASTM D5185m | >2 | 0 | <1 | |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | 0 | |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | |
| Copper | ppm | ASTM D5185m | >50 | 7 | 10 | |
| Tin | ppm | ASTM D5185m | >10 | 0 | <1 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | |
| Barium | ppm | ASTM D5185m | 90 | 0 | 0 | |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | |
| Magnesium | ppm | ASTM D5185m | 90 | 0 | 2 | |
| Calcium | ppm | ASTM D5185m | 2 | 0 | 0 | |
| Phosphorus | ppm | ASTM D5185m | | 0 | 4 | |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | |
| Sulfur | ppm | ASTM D5185m | | 15916 | 13327 | |
| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 1 | 9 | |
| Sodium | ppm | ASTM D5185m | | 2 | <1 | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | |
| Water | % | ASTM D6304 | >0.05 | 0.007 | 0.004 | |
| ppm Water | ppm | ASTM D6304 | >500 | 71 | 40.4 | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 2030 | | |
| Particles >6µm | | ASTM D7647 | >1300 | 517 | | |
| Particles >14µm | | ASTM D7647 | >80 | 29 | | |
| Particles >21µm | | ASTM D7647 | | 6 | | |
| Particles >38µm | | ASTM D7647 | >4 | 0 | | |
| Particles >71µm | | ASTM D7647 | | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | 18/16/12 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.4 | 0.39 | 0.35 | |

Contact/Location: JESSICA ? - RAPBEN



OIL ANALYSIS REPORT

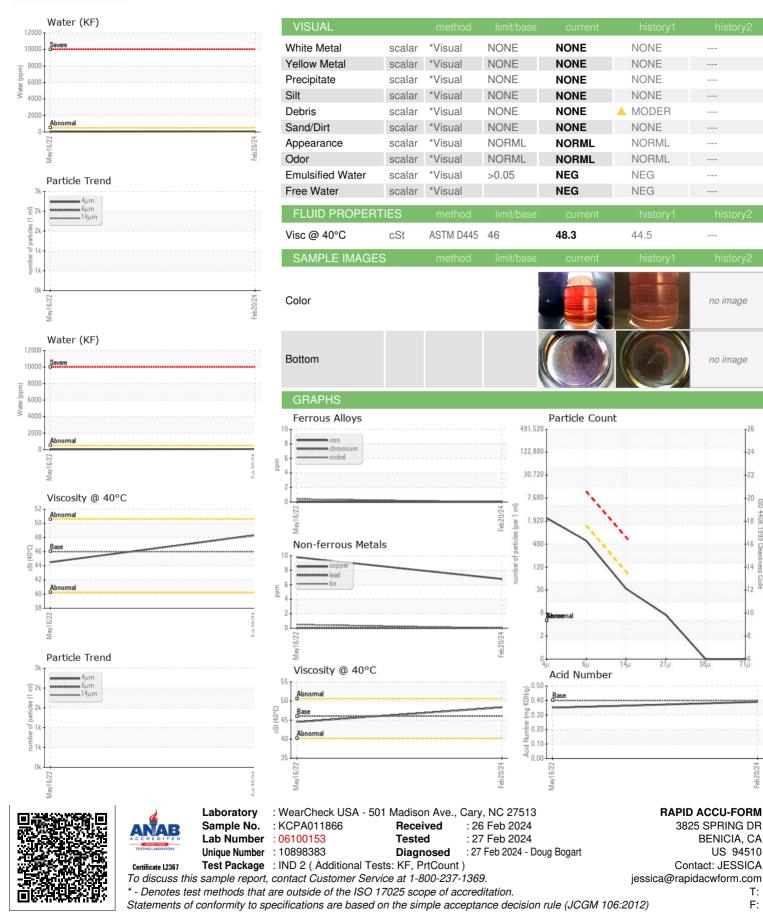

BENICIA, CA

US 94510

T:

F:

no image

no image

4406

:1999 Cle

14