




# OIL ANALYSIS REPORT

Sample Rating Trend

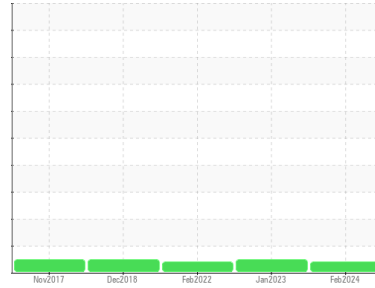

VISCOSITY



Area  
**WQ**  
 Machine Id  
**DODGE 00101**  
 Component  
**Gearbox**  
 Fluid  
**GEAR OIL ISO 220 (1 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0721336</b>	WC0570399	WC0524330
Sample Date	Client Info		<b>25 Feb 2024</b>	17 Jan 2023	07 Feb 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>62</b>	102	81
Chromium	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	6	6
Lead	ppm	ASTM D5185m >100	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>12</b>	8	5
Barium	ppm	ASTM D5185m 15	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 15	<b>&lt;1</b>	1	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 50	<b>3</b>	2	2
Calcium	ppm	ASTM D5185m 50	<b>12</b>	8	8
Phosphorus	ppm	ASTM D5185m 350	<b>202</b>	171	178
Zinc	ppm	ASTM D5185m 100	<b>0</b>	3	2
Sulfur	ppm	ASTM D5185m 12500	<b>10285</b>	14106	14366

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>21</b>	33	23
Sodium	ppm	ASTM D5185m	<b>2</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>4</b>	3	2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.85	<b>0.51</b>	0.44	0.45



# OIL ANALYSIS REPORT







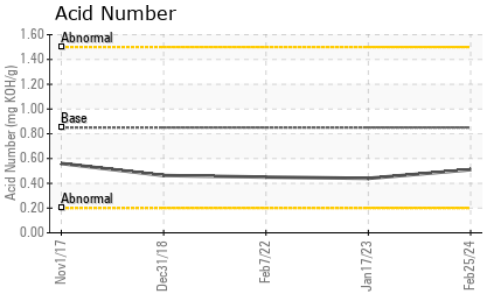
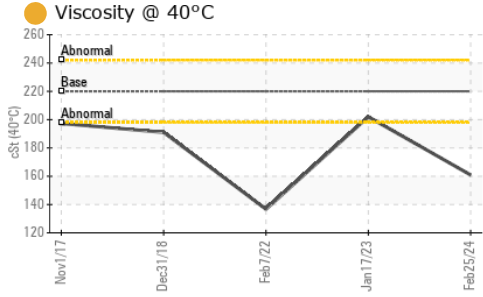


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	<span style="color: orange;">●</span> 160.9	202	<span style="color: orange;">●</span> 136.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

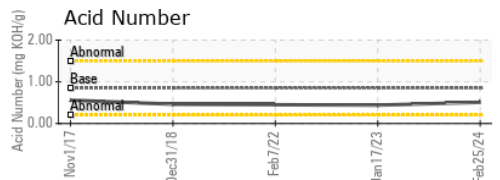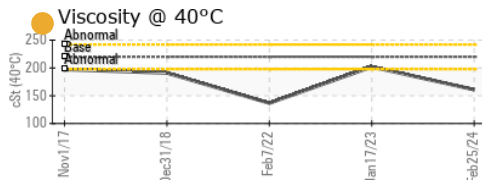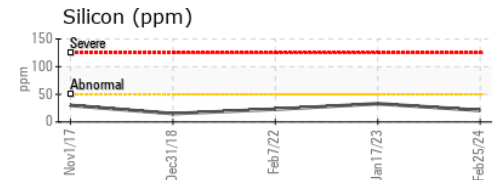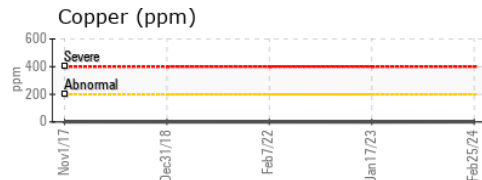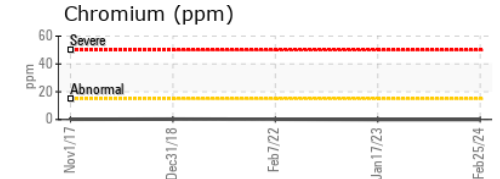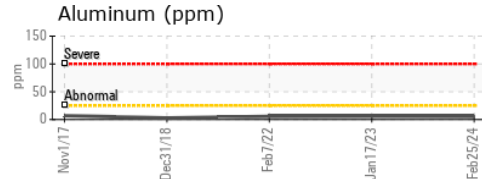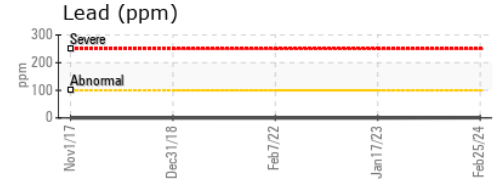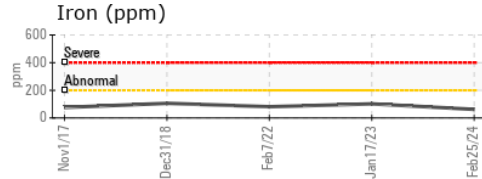

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0721336 **Received** : 26 Feb 2024  
**Lab Number** : 06100258 **Tested** : 01 Mar 2024  
**Unique Number** : 10898488 **Diagnosed** : 01 Mar 2024 - Jonathan Hester  
**Test Package** : MOB 2

**S.M. LORUSSO & SONS**  
 221 NORFOLK ST.  
 WALPOLE, MA  
 US 02081  
 Contact: PAUL BECKMAN  
 pbeckman@smlorusso.com  
 T: (508)668-2603  
 F: (508)660-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)