



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
MERCEDES-BENZ C350 4637-05 7F851018

Component
Gasoline Engine
Fluid
{not provided} (--- GAL)



DIAGNOSIS

Recommendation
No corrective action is recommended at this time.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0641378	---	---
Sample Date	Client Info			21 Feb 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	---	---
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	3	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>50	1	---	---
Copper	ppm	ASTM D5185m	>155	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		45	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		102	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		426	---	---
Calcium	ppm	ASTM D5185m		1074	---	---
Phosphorus	ppm	ASTM D5185m		601	---	---
Zinc	ppm	ASTM D5185m		755	---	---
Sulfur	ppm	ASTM D5185m		2056	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	7	---	---
Sodium	ppm	ASTM D5185m	>400	<1	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>4.0	<1.0	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.7	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.9	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.70	---	---












OIL ANALYSIS REPORT

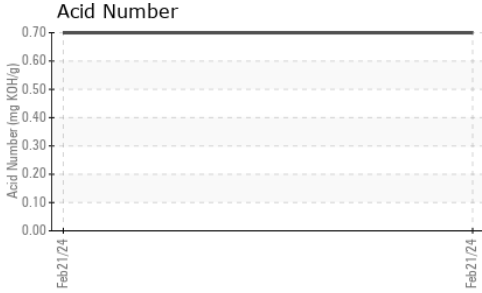

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	7.6	---	---

GRAPHS

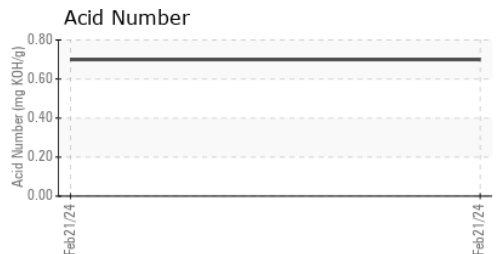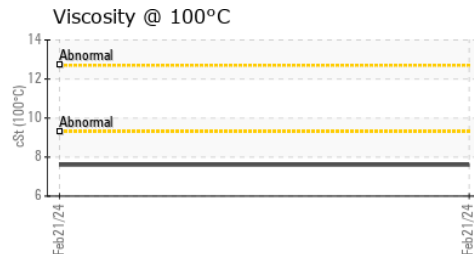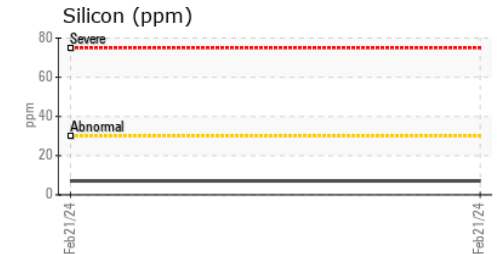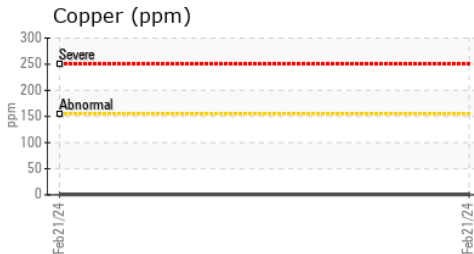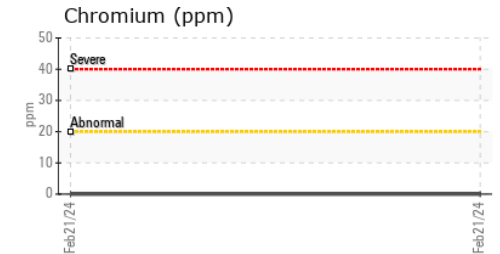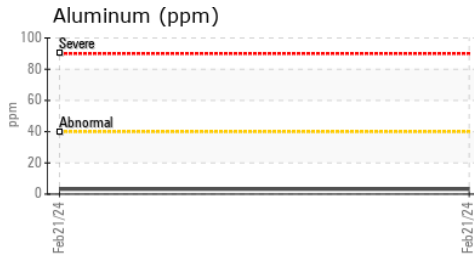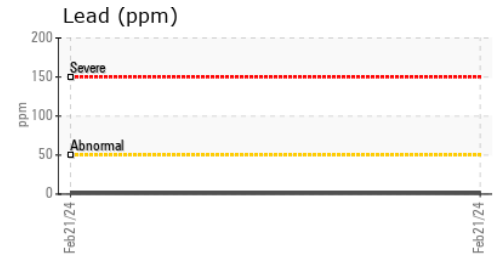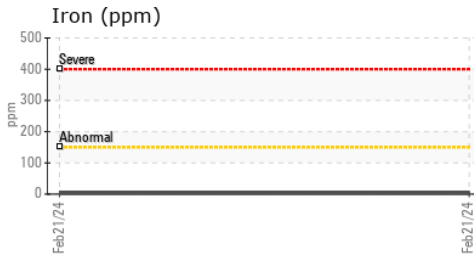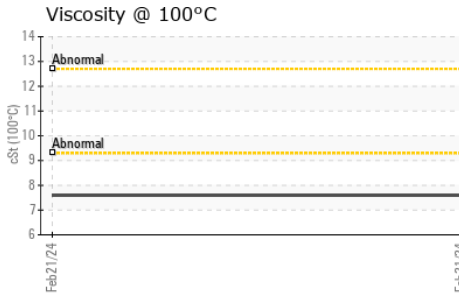

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0641378 **Received** : 26 Feb 2024
Lab Number : 06100279 **Tested** : 28 Feb 2024
Unique Number : 10898509 **Diagnosed** : 28 Feb 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

DAVIDSONVILLE TECH
 PO BOX 56
 DAVIDSONVILLE, MD
 US 21035
 Contact: CHRIS ARNOLD
 cca1406@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:

F: x: