

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id **CR6621 - 4.2**

Component Right Winch

GEAR OIL ISO 220 (--- GAL)

| DIA | $I \hookrightarrow N$ | 1/ 1/4 | 91.91 |
|-----|-----------------------|--------|-------|
| | | | |

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition


The condition of the oil is acceptable for the time in service.


| | | | Mar2023 | Feb2024 | | |
|------------------|--------|---------------|------------|-----------------|--------------|--------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0833330 | WC0746546 | |
| Sample Date | | Client Info | | 16 Feb 2024 | 15 Mar 2023 | |
| Machine Age | hrs | Client Info | | 6382 | 5524 | |
| Oil Age | hrs | Client Info | | 858 | 385 | |
| Oil Changed | 1110 | Client Info | | Changed | Changed | |
| Sample Status | | Oliciti IIIIo | | NORMAL | ATTENTION | |
| CONTAMINATION | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | | NEG | NEG | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| | nnm | | | | | |
| Iron | ppm | ASTM D5185m | >150 | 8 | 4 | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | <1 | |
| Nickel | ppm | | >10 | 0 | <1 | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | |
| Silver | ppm | ASTM D5185m | - | 0 | 0 | |
| Aluminum | ppm | ASTM D5185m | | 0 | <1 | |
| Lead | ppm | ASTM D5185m | >15 | 1 | 0 | |
| Copper | ppm | ASTM D5185m | >80 | <1 | 0 | |
| Tin | ppm | ASTM D5185m | | 0 | 0 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 50 | 0 | 0 | |
| Barium | ppm | ASTM D5185m | 15 | 0 | 0 | |
| Molybdenum | ppm | ASTM D5185m | 15 | 0 | 0 | |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | |
| Magnesium | ppm | ASTM D5185m | 50 | 0 | <1 | |
| Calcium | ppm | ASTM D5185m | 50 | 3 | 2 | |
| Phosphorus | ppm | ASTM D5185m | 350 | 82 | 99 | |
| Zinc | ppm | ASTM D5185m | 100 | 0 | 0 | |
| Sulfur | ppm | ASTM D5185m | 12500 | 505 | 94 | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 5 | 3 | |
| Sodium | ppm | ASTM D5185m | | 1 | 1 | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 2 | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | |
| Silt | scalar | *Visual | NONE | NONE | MODER | |
| Debris | scalar | *Visual | NONE | NONE | NONE | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | |
| Appearance | scalar | *Visual | NORML | NORML | SOLID | |
| Odor | scalar | *Visual | NORML | NORML | NORML | |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | |
| Free Water | scalar | *Visual | | NEG | >10% | |
| 2:41:10) Pov: 1 | | | 0 | ontact/Location | IOHNI HVWKIN | IS BLICWILTY |





OIL ANALYSIS REPORT

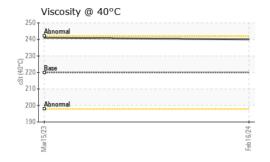

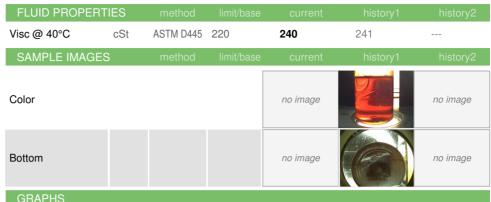









Certificate L2367

Laboratory Sample No.

Lab Number : 06100498 Unique Number : 10898728

: WC0833330

Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Feb 2024

Tested : 27 Feb 2024 Diagnosed : 28 Feb 2024 - Don Baldridge

BUCKNER - WILLIS 18123 HWY 75 NORTH WILLIS, TX

US 77378 Contact: JOHN HAWKINS johnh@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: