




OIL ANALYSIS REPORT

Sample Rating Trend

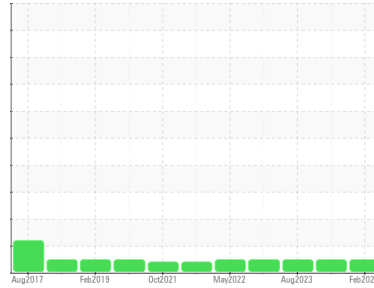

NORMAL



Machine Id
8813328

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		IL0034876	IL06024998	IL06019347
Sample Date	Client Info		15 Feb 2024	24 Nov 2023	22 Aug 2023
Machine Age	mls	Client Info	361244	359145	352714
Oil Age	mls	Client Info	0	40000	40000
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	17	20	39
Chromium	ppm	ASTM D5185m >20	1	<1	2
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	2	7
Lead	ppm	ASTM D5185m >40	2	<1	5
Copper	ppm	ASTM D5185m >330	<1	2	<1
Tin	ppm	ASTM D5185m >15	0	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	45	43	16
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	42	43	47
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	520	473	523
Calcium	ppm	ASTM D5185m 3000	1720	1613	1801
Phosphorus	ppm	ASTM D5185m 1150	769	747	816
Zinc	ppm	ASTM D5185m 1350	921	889	940
Sulfur	ppm	ASTM D5185m 4250	2274	2399	2257

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	10	13
Sodium	ppm	ASTM D5185m	3	0	4
Potassium	ppm	ASTM D5185m >20	6	8	11

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.3	0.6
Nitration	Abs/cm	*ASTM D7624 >20	8.6	7.9	13.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.3	21.9	25.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.0	20.4	26.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.7	9.2	7.1







OIL ANALYSIS REPORT

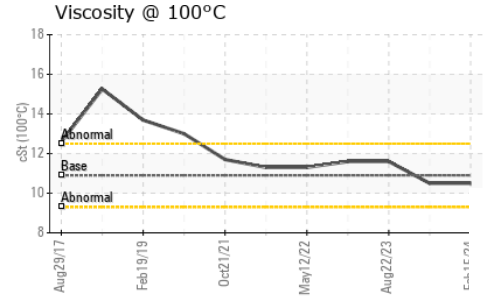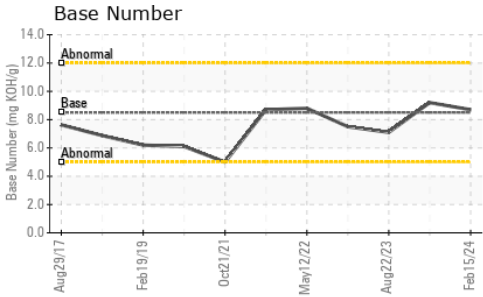

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	10.5	10.5	11.6

GRAPHS

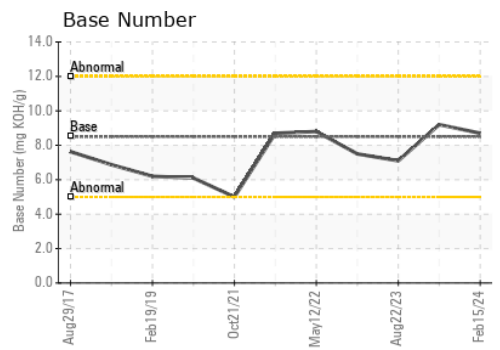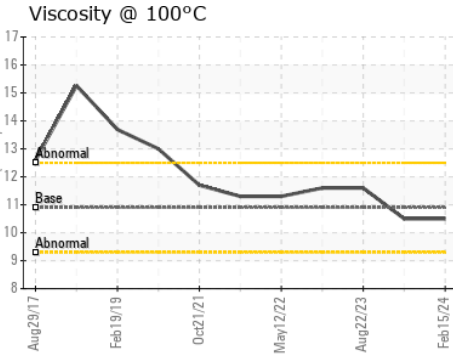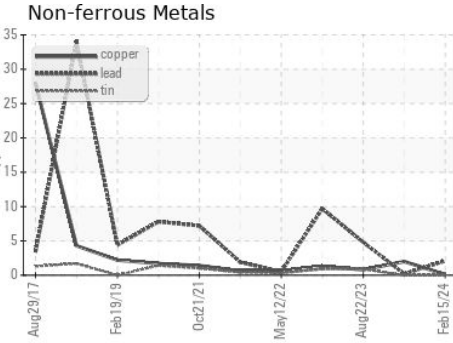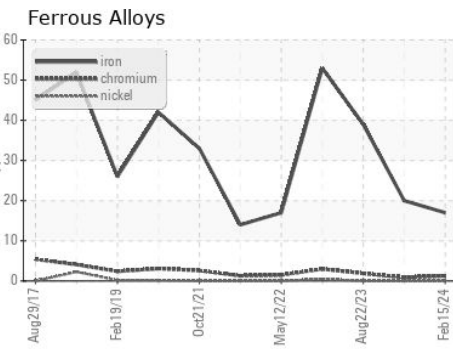

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0034876
Lab Number : **06100649**
Unique Number : 10898879
Test Package : FLEET
Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 27 Feb 2024 - Wes Davis

IDEALEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331
 Contact: DAVID JOHNS
 davidjohns@idealease.com
 T: (404)699-5571
 F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)