




# OIL ANALYSIS REPORT

## Sample Rating Trend

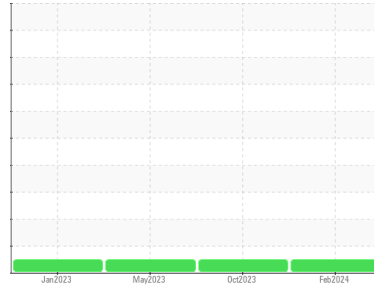

**NORMAL**



Area  
**SCHTRUCK**  
 Machine Id  
**6375 [SCHTRUCK]**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0006651</b>	SBP0005679	SBP0004366
Sample Date	Client Info		<b>21 Feb 2024</b>	10 Oct 2023	15 May 2023
Machine Age	mls	Client Info	<b>178910</b>	141833	104966
Oil Age	mls	Client Info	<b>37077</b>	36867	35659
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>7</b>	18	20
Chromium	ppm	ASTM D5185m >5	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>6</b>	7	12
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >150	<b>13</b>	30	46
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	4
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	60	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1024</b>	991	889
Calcium	ppm	ASTM D5185m 1070	<b>1176</b>	1152	1281
Phosphorus	ppm	ASTM D5185m 1150	<b>1054</b>	965	837
Zinc	ppm	ASTM D5185m 1270	<b>1342</b>	1278	1165
Sulfur	ppm	ASTM D5185m 2060	<b>2513</b>	2296	2356

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	5	5
Sodium	ppm	ASTM D5185m	<b>3</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>14</b>	17	23

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.7	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.6</b>	9.6	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.8</b>	21.9	21.4

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.6</b>	20.0	18.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	5.8	6.6







# OIL ANALYSIS REPORT

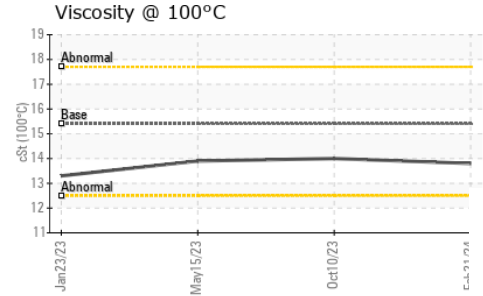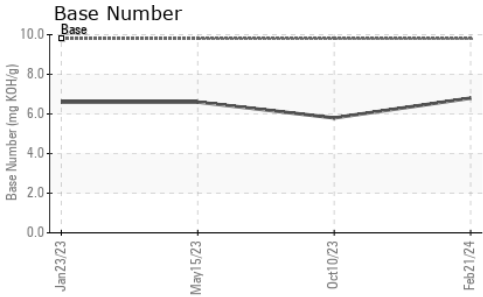

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.0

## GRAPHS

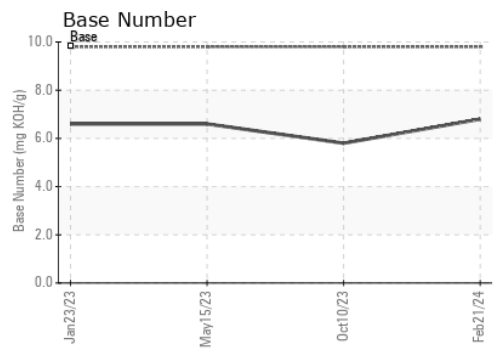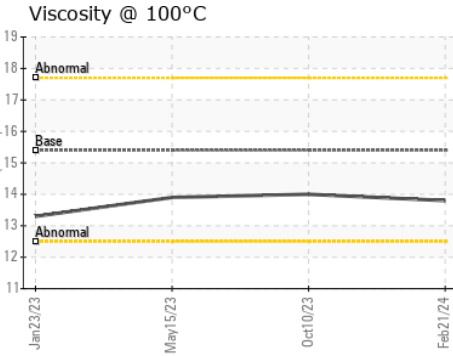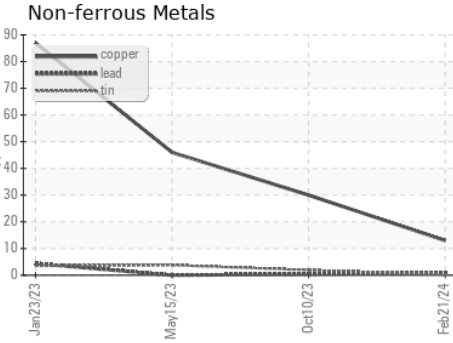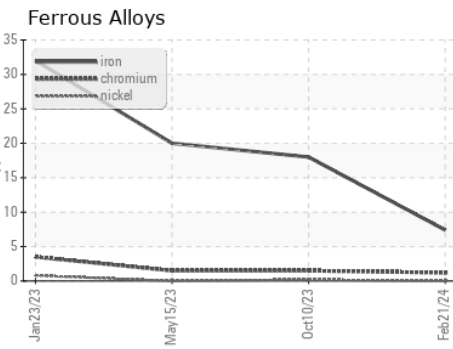

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0006651 **Received** : 26 Feb 2024  
**Lab Number** : **06100749** **Tested** : 27 Feb 2024  
**Unique Number** : 10898979 **Diagnosed** : 27 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**SCHMIDT TRANSPORTATION - 605449**  
 108 E Bay Road  
 Plattsmouth, NE  
 US 68048  
 Contact: NICK DOTY  
 doty@liquidtrucking.com  
 T: (402)949-9398  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)