

## **OIL ANALYSIS REPORT**

### COMPRESSOR STATIONS/RED HILLS WEST AREA PERSEUS (S/N LE11336) Component

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)

#### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

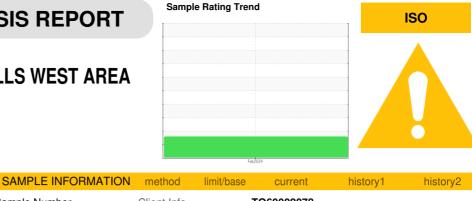

		methou	inititi base	Guirein	Thistory	Thistoryz
Sample Number		Client Info		TO60002078		
Sample Date		Client Info		07 Feb 2024		
Machine Age	hrs	Client Info		4808		
Oil Age	hrs	Client Info		4808		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base		la la tanun d	la i a ta mu O
WEAR METALS		method	iinii/base		history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm		0	8		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m	0	0		
Magnesium	ppm	ASTM D5185m	0	<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m	0	25		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	0	0		
				-		
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm		>20	1		
Water	%	ASTM D6304		0.541		
ppm Water	ppm	ASTM D6304	>22600	5416		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>A</b> 17366		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>320	<b>414</b>		
Particles >21µm		ASTM D7647	>80	68		
Particles >38µm		ASTM D7647	>20	2		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/17/15	<b>1/20/16</b>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.26		
	manoning			0.20		



# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

cSt

Scale

method

\*Visual

\*Visual

\*Visua

\*Visual

\*Visual

\*Visual

\*Visual

\*Visual

method

ASTM D445

ASTM D445

ASTM D2270

method

scalar \*Visual

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

>2.26

151

28

224

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

current

current

NEG

NEG

122

23.2

221

history1

history

history1

no image

no image

history2

history2

history2

no image

no image

VISUAL

White Metal

Yellow Metal

Precipitate

Silt

Debris

Odor

Sand/Dirt

Appearance

Free Water

Visc @ 40°C


Visc @ 100°C

Viscosity Index (VI)


SAMPLE IMAGES

**Emulsified Water** 

FLUID PROPERTIES

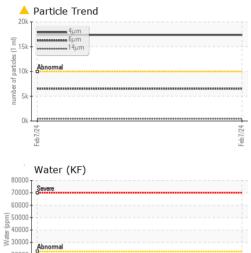




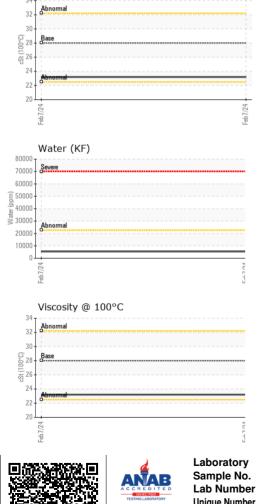

TESTING LABORATORY	Unique Number	: 10899138	Diagnosed	: 28 Feb 2024 -	Don Baldridge		
Certificate L2367	Test Package	: IND 2 ( Additi	onal Tests: KF, KV100, I	PrtCount, VI )		Conta	
To discuss this sample report, contact Customer Service at 1-800-237-1369.							
* - Denotes te	st methods that	are outside of th	he ISO 17025 scope of a	ccreditation.			
Statements of	conformity to sp	pecifications are	based on the simple acc	ceptance decis	ion rule (JCG	M 106:2012)	

Color



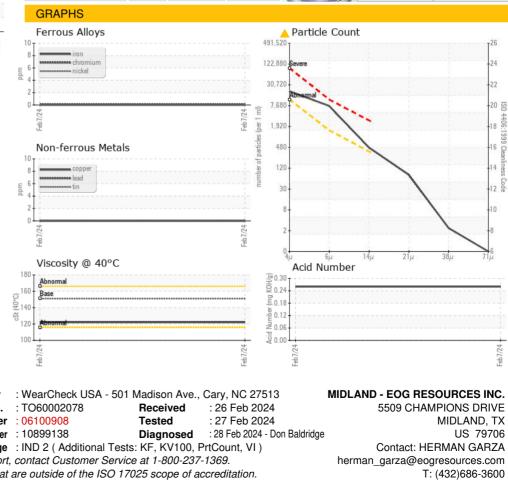

Report Id: EOGMID [WUSCAR] 06100908 (Generated: 02/28/2024 15:00:57) Rev: 1

Submitted By: DUSTY SUTHERLAND

F: