


OIL ANALYSIS REPORT

Area COMPRESSOR STATIONS/RED HILLS WEST AREA

VENALI (S/N 21180)
Component

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)

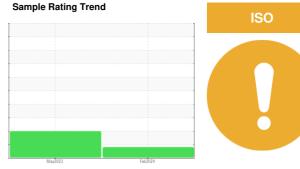

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2023	Feb 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60002031	TO60000817	
Sample Date		Client Info		06 Feb 2024	05 May 2023	
Machine Age	hrs	Client Info		227	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ATTENTION	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	4	
Chromium	ppm	ASTM D5185m	>10	<1	<1	
Nickel	ppm	ASTM D5185m		0	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	2	0	
Lead	ppm	ASTM D5185m	>25	0	0	
Copper	ppm	ASTM D5185m	>50	0	0	
Tin	ppm	ASTM D5185m	>15	0	0	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	
Barium	ppm	ASTM D5185m	0	8	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	0	<1	<1	
Calcium	ppm	ASTM D5185m	0	<1	<1	
Phosphorus	ppm	ASTM D5185m	0	24	6	
Zinc	ppm	ASTM D5185m	0	0	<1	
Sulfur	ppm	ASTM D5185m	0	13	39	
CONTAMINANTS	• •	method	limit/base	current	history1	history2
Silicon		ASTM D5185m	>25	<1	2	
Sodium	ppm	ASTM D5185m	>20	4	2	
Potassium		ASTM D5185m	>20	2	1	
Water	ppm %		>2.26	0.273	0.505	
ppm Water	ppm	ASTM D6304	>22600	2738	5050	
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	7124	▲ 125545	
Particles >6µm		ASTM D7647		<u>1974</u>	▲ 40953	
Particles >14µm		ASTM D7647	>320	107	<u>▲</u> 2108	
Particles >21μm		ASTM D7647		25	▲ 192	
Particles >38µm		ASTM D7647	>20	1	5	
Particles >71μm		ASTM D7647		1	3	
Oil Cleanliness		ISO 4406 (c)	>20/17/15	20/18/14	<u>△</u> 24/23/18	
FLUID DEGRADA	TION_	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.40	0.71	
` '	,					



OIL ANALYSIS REPORT

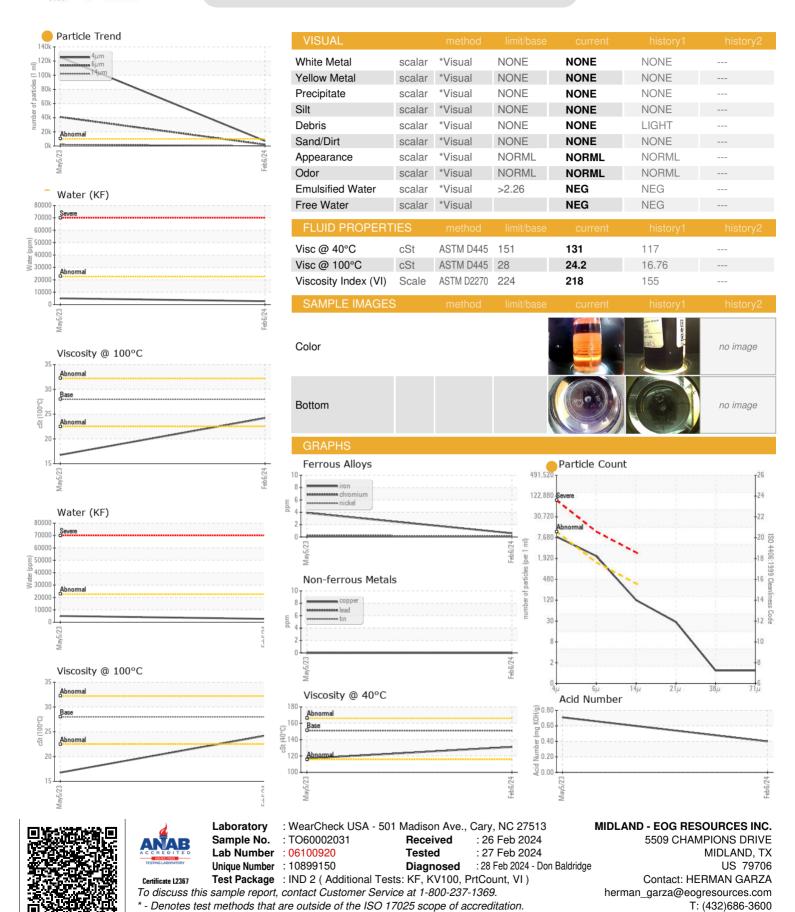

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: