

OIL ANALYSIS REPORT

ISO

COMPRESSOR STATIONS/ROSS DRAW AREA QUAIL (S/N 5629X3253)

Component

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

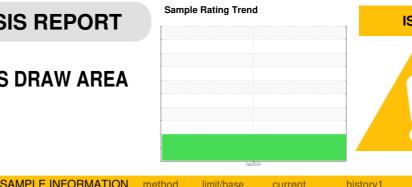

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60002092		
Sample Date		Client Info		21 Feb 2024		
Machine Age	hrs	Client Info		16128		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
	ppm		>25	0		
Lead	ppm	ASTM D5185m				
Copper Tin	ppm	ASTM D5185m	>50	0		
	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	8		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	0	<1		
Calcium	ppm	ASTM D5185m	0	<1		
Phosphorus	ppm	ASTM D5185m	0	33		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	0	477		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>2.26	0.520		
ppm Water	ppm	ASTM D6304	>22600	5204		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	45586		
Particles >6µm		ASTM D7647	>1300	12766		
Particles >14µm		ASTM D7647	>320	<u></u> 617		
Particles >21µm		ASTM D7647	>80	100		
Particles >38µm		ASTM D7647	>20	2		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/17/15	23/21/16		
FLUID DEGRADA	MOITA	method	limit/base	current	history1	history2
			IIIIII Dase			
Acid Number (AN)	mg KOH/g	ASTM D8045		0.30		



OIL ANALYSIS REPORT

