

OIL ANALYSIS REPORT

Area COMPRESSOR STATIONS/CONAN AREA MEDUSA (S/N 5629X3225) Component

Compressor

TULCO LUBSOIL LPG WS 150 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO60002042	TO60001227	TO60000830
Sample Date		Client Info		09 Feb 2024	28 Aug 2023	27 Apr 2023
Machine Age	hrs	Client Info		26751	0	0
Oil Age	hrs	Client Info		16944	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	0
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m		0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	3	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	0	<1
Tin	ppm	ASTM D5185m	>15	0	1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	3	3
Barium	ppm	ASTM D5185m	0	8	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	<1	2	<1
Calcium	ppm	ASTM D5185m	0	<1	0	<1
Phosphorus	ppm	ASTM D5185m	0	28	<1	4
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	240	593	241
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	1
Sodium	ppm	ASTM D5185m		5	0	4
Potassium	ppm	ASTM D5185m	>20	2	2	2
Water	%	ASTM D6304	>2.26	0.332	0.818	0.879
ppm Water	ppm	ASTM D6304	>22600	3320	8183.6	8790
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1659	6160	12831
Particles >6µm		ASTM D7647	>1300	485	A 2538	4 349
Particles >14µm		ASTM D7647	>320	26	A 337	161
Particles >21µm		ASTM D7647	>80	6	66	13
Particles >38µm		ASTM D7647	>20	1	0	0
Particles >71µm		ASTM D7647	>4	1	0	0
Oil Cleanliness		ISO 4406 (c)	>20/17/15	18/16/12	▲ 20/19/16	▲ 21/19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.41

mg KOH/g ASTM D8045

Acid Number (AN)

Report Id: EOGMID [WUSCAR] 06100944 (Generated: 02/28/2024 14:56:28) Rev: 1


Submitted By: MARCO MARTINEZ


0.24


0.15



OIL ANALYSIS REPORT





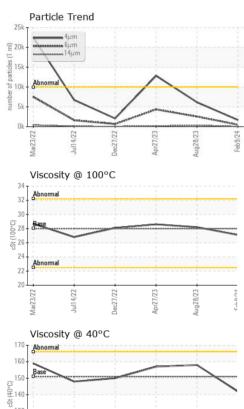

)ec27/22


130

120 Abnorma


110

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2.26	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	151	142	158	157
Visc @ 100°C	cSt	ASTM D445	28	27.1	28.2	28.6
Viscosity Index (VI)	Scale	ASTM D2270	224	229	218	222
SAMPLE IMAGES		method	limit/base	current	history1	history2
Calar						

Color



Bottom

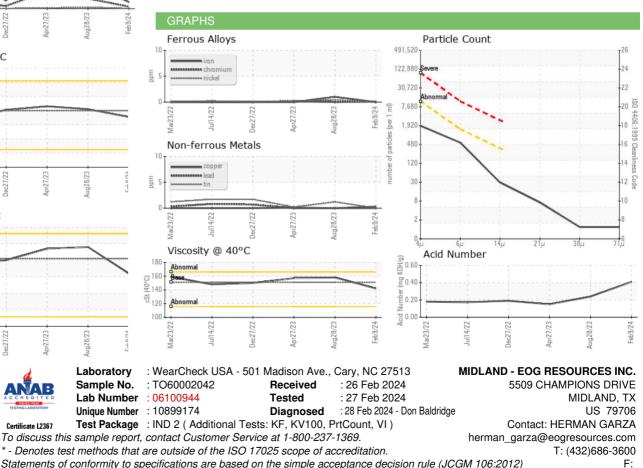

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

ug28/23

Submitted By: MARCO MARTINEZ

Page 2 of 2