

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

KAESER DSD 175 8782284 (S/N 1218)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


May2023 0x22023 Feb2024								
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA015132	KCPA009472	KCPA001161		
Sample Date		Client Info		20 Feb 2024	27 Oct 2023	09 May 2023		
Machine Age	hrs	Client Info		8780	7320	3661		
Oil Age	hrs	Client Info		4780	0	0		
Oil Changed		Client Info		Changed	N/A	N/A		
Sample Status				NORMAL	NORMAL	NORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	0	0		
Chromium	ppm	ASTM D5185m	>10	<1	0	<1		
Nickel	ppm	ASTM D5185m	>3	0	0	0		
Titanium	ppm	ASTM D5185m	>3	0	0	<1		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum	ppm	ASTM D5185m	>10	2	0	<1		
Lead	ppm	ASTM D5185m	>10	0	0	0		
Copper	ppm	ASTM D5185m		<1	<1	4		
Tin	ppm	ASTM D5185m	>10	0	0	0		
Vanadium	ppm	ASTM D5185m	210	0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		8	0	0		
Molybdenum	ppm	ASTM D5185m		0	0	0		
Manganese	ppm	ASTM D5185m		0	0	<1		
Magnesium	ppm	ASTM D5185m		2	0	10		
Calcium	ppm	ASTM D5185m		0	0	0		
		ASTM D5185m	500	27	5	4		
Phosphorus Zinc	ppm	ASTM D5185m	500	0	0	9		
Zinc Sulfur	ppm ppm	ASTM D5185m ASTM D5185m		1365	1770	9 10535		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	0	0	<1		
Sodium	ppm	ASTM D5185m	220	0	<1	<1		
Potassium	ppm	ASTM D5185m	>20	<1	0	4		
Water	%	ASTM D5185III		0.002	0.005	0.005		
ppm Water	7 ₀	ASTM D6304 ASTM D6304		20	56.3	50.7		
FLUID CLEANLI		method	limit/base	current	history1	history2		
			mmubase	2249				
Particles >4µm		ASTM D7647	1000	-	1524	851		
Particles >6µm		ASTM D7647		552	339	251		
Particles >14µm		ASTM D7647	>80	47	16	21		
Particles >21µm		ASTM D7647		17	4	4		
Particles >38µm		ASTM D7647		1	0	0		
Particles >71µm		ASTM D7647		0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13	18/16/11	17/15/12		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.48	0.42	0.37		



OIL ANALYSIS REPORT






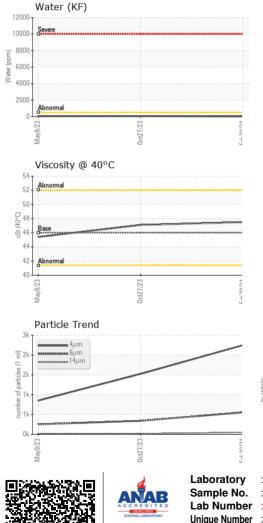

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
	IES	method	limit/base	current	historv1	history2
FLUID PROPERT		method	limit/base	current	history1	history2
FLUID PROPERT Visc @ 40°C	IES cSt	method ASTM D445	limit/base 46	current 47.5	history1 47.1	history2 45.4
	cSt					
Visc @ 40°C	cSt	ASTM D445	46	47.5	47.1	45.4



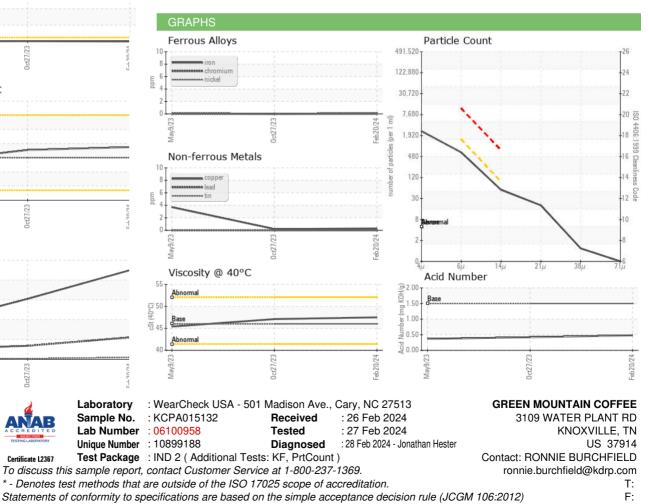

Certificate L2367