




OIL ANALYSIS REPORT

Sample Rating Trend

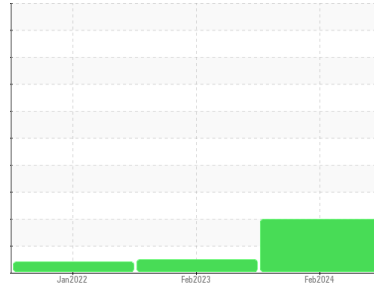

Machine Id
7484034 (S/N 1614)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA013548	KCP46210	KCP40857
Sample Date	Client Info			22 Feb 2024	17 Feb 2023	28 Jan 2022
Machine Age	hrs	Client Info		5759	4227	2128
Oil Age	hrs	Client Info		1500	2000	2128
Oil Changed	Client Info			Not Chngd	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	2
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	1	1	2
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	44	27	12
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	100	73	74	82
Calcium	ppm	ASTM D5185m	0	2	2	1
Phosphorus	ppm	ASTM D5185m	0	23	0	5
Zinc	ppm	ASTM D5185m	0	2	8	0
Sulfur	ppm	ASTM D5185m	23500	19340	21392	17345

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		16	16	15
Potassium	ppm	ASTM D5185m	>20	11	6	12
Water	%	ASTM D6304	>0.05	0.014	0.014	0.012
ppm Water	ppm	ASTM D6304	>500	148	140.5	123.3

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9587	4761	10285
Particles >6µm		ASTM D7647	>1300	▲ 3650	1190	▲ 3280
Particles >14µm		ASTM D7647	>80	▲ 887	37	70
Particles >21µm		ASTM D7647	>20	▲ 284	9	10
Particles >38µm		ASTM D7647	>4	▲ 8	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 20/19/17	19/17/12	▲ 19/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.40	0.37	0.37

OIL ANALYSIS REPORT

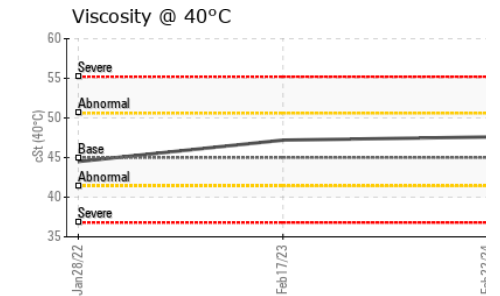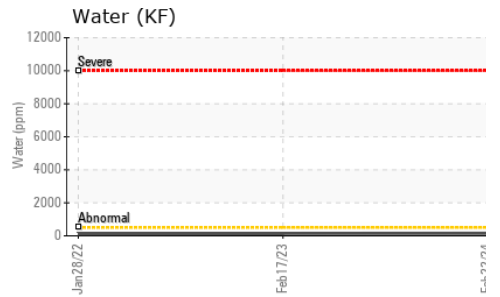
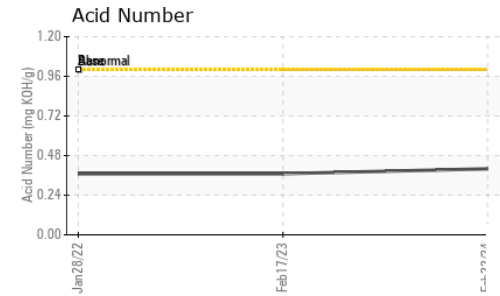
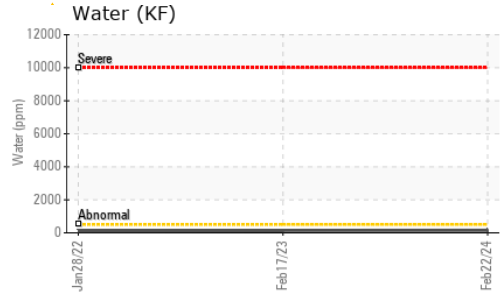
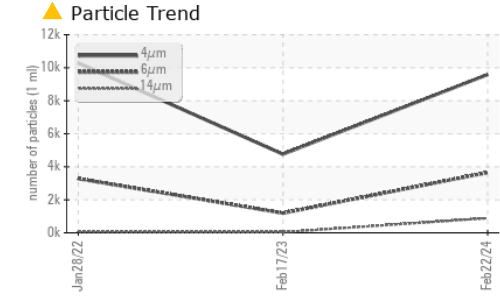


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.6	47.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

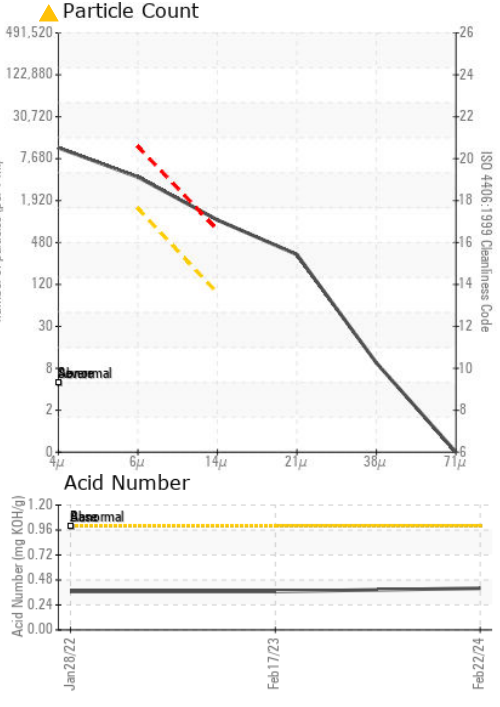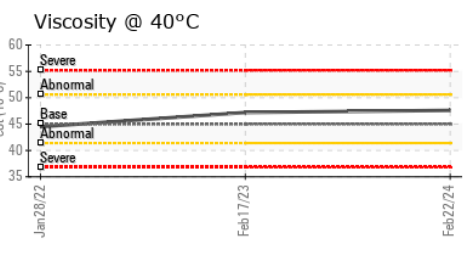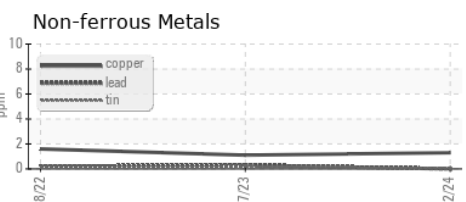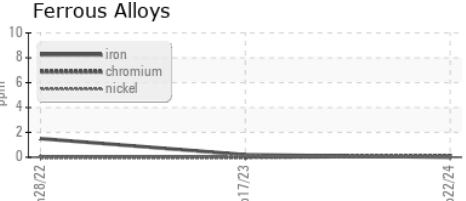

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA013548 **Received** : 26 Feb 2024
Lab Number : 06100960 **Tested** : 27 Feb 2024
Unique Number : 10899190 **Diagnosed** : 28 Feb 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

REGAL PLASTIC
 4150 GULLEY CT
 EARTH CITY, MO
 US 63045
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)