


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CATERPILLAR 990K 6088 (S/N A9P00362)
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

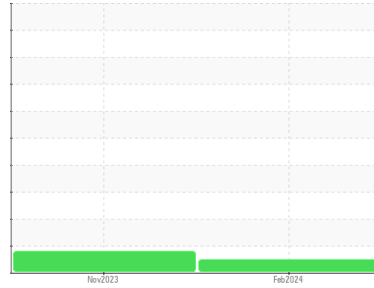

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10001711	TO10002896	---
Sample Date	Client Info			20 Feb 2024	06 Nov 2023	---
Machine Age	hrs	Client Info		15159	14829	---
Oil Age	hrs	Client Info		330	508	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	MARGINAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	2	23	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	3	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	1	<1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		60	61	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		934	952	---
Calcium	ppm	ASTM D5185m		1029	1097	---
Phosphorus	ppm	ASTM D5185m		1002	1080	---
Zinc	ppm	ASTM D5185m		1250	1282	---
Sulfur	ppm	ASTM D5185m		3182	3335	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	4	---
Sodium	ppm	ASTM D5185m		44	62	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Fuel	%	ASTM D3524	>5	<1.0	▲ 2.3	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	6.6	7.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	19.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	14.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.69	9.66	---









OIL ANALYSIS REPORT

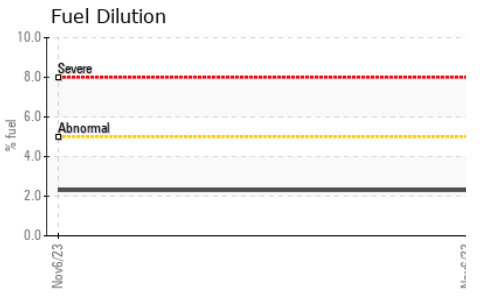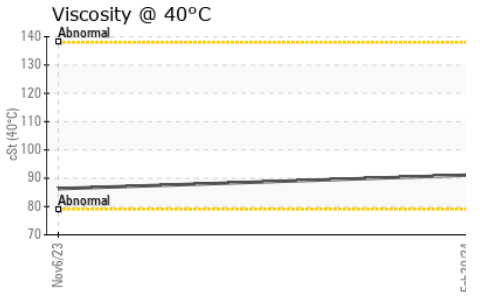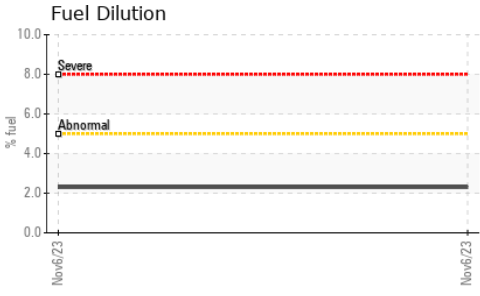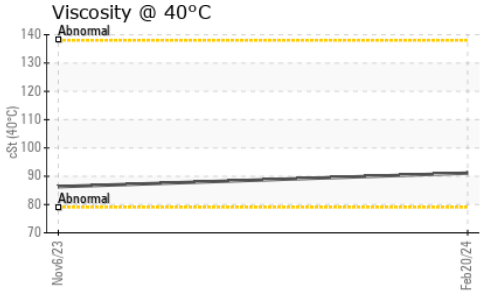

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	91.1	86.3	---
Visc @ 100°C	cSt	ASTM D445	12.4	12.3	---
Viscosity Index (VI)	Scale	ASTM D2270	130	137	---

GRAPHS

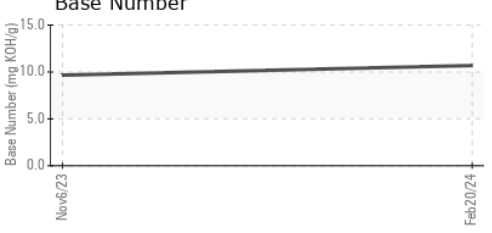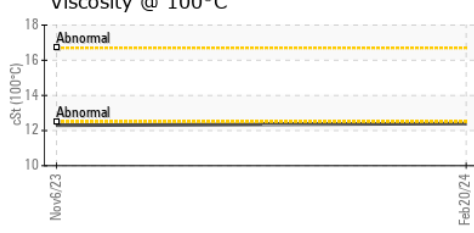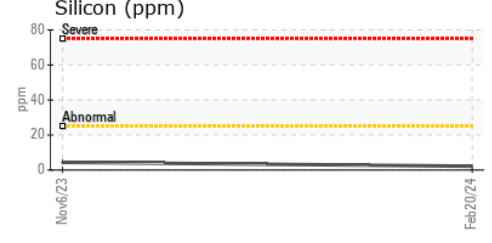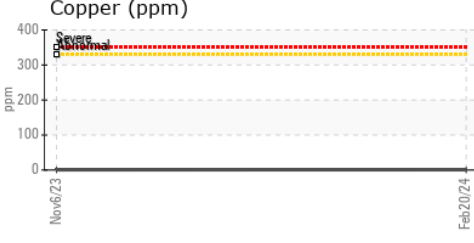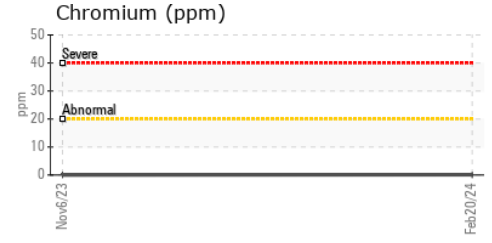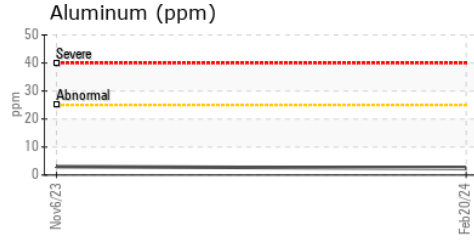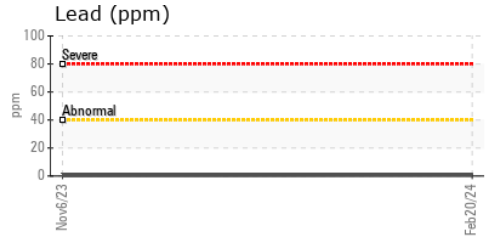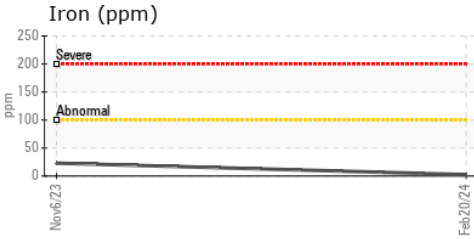

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10001711 **Received** : 26 Feb 2024
Lab Number : **06101117** **Tested** : 28 Feb 2024
Unique Number : 10899347 **Diagnosed** : 28 Feb 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (918)928-4575

F: