



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
FTD VB STAND

Component
Transmission (Auto)

Fluid
MOBIL MULTI-VEHICLE ATF (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	SBP0005140	---	---
Sample Date	Client Info	26 Feb 2024	---	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	0	---
Chromium	ppm	ASTM D5185m >5	<1	---
Nickel	ppm	ASTM D5185m >5	0	---
Titanium	ppm	ASTM D5185m	0	---
Silver	ppm	ASTM D5185m >5	0	---
Aluminum	ppm	ASTM D5185m >50	1	---
Lead	ppm	ASTM D5185m >50	0	---
Copper	ppm	ASTM D5185m >225	0	---
Tin	ppm	ASTM D5185m >10	0	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	64	---
Barium	ppm	ASTM D5185m	<1	---
Molybdenum	ppm	ASTM D5185m	0	---
Manganese	ppm	ASTM D5185m	<1	---
Magnesium	ppm	ASTM D5185m	5	---
Calcium	ppm	ASTM D5185m	126	---
Phosphorus	ppm	ASTM D5185m	189	---
Zinc	ppm	ASTM D5185m	7	---
Sulfur	ppm	ASTM D5185m	1078	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	4	---
Sodium	ppm	ASTM D5185m	1	---
Potassium	ppm	ASTM D5185m >20	0	---
Water	%	ASTM D6304 >0.1	0.019	---
ppm Water	ppm	ASTM D6304 >1000	190	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ 54037	---	---
Particles >6µm	ASTM D7647 >2500	2481	---	---
Particles >14µm	ASTM D7647 >320	8	---	---
Particles >21µm	ASTM D7647 >80	2	---	---
Particles >38µm	ASTM D7647 >20	0	---	---
Particles >71µm	ASTM D7647 >4	0	---	---
Oil Cleanliness	ISO 4406 (c) >20/18/15	▲ 23/18/10	---	---


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.39	---




OIL ANALYSIS REPORT


▲ Particle Trend

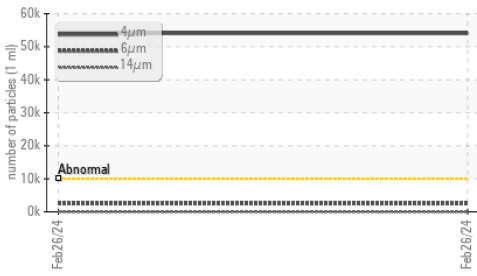


Water (KF)

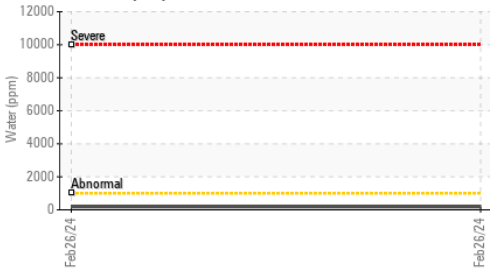


Acid Number

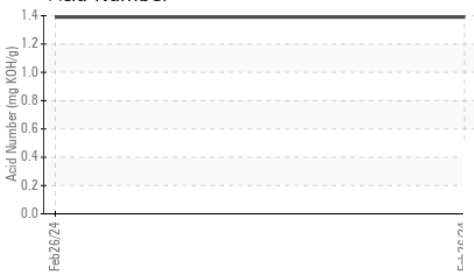

Water (KF)

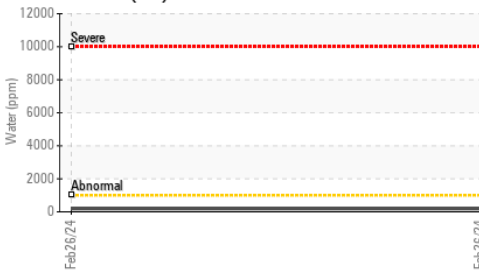

Viscosity @ 40°C

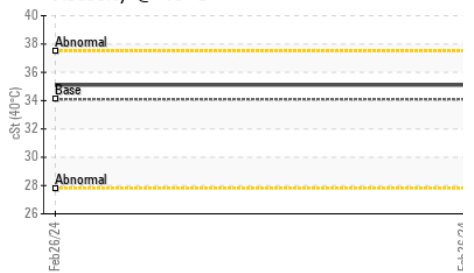

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	34.1	35.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS


Ferrous Alloys




Non-ferrous Metals



Viscosity @ 40°C

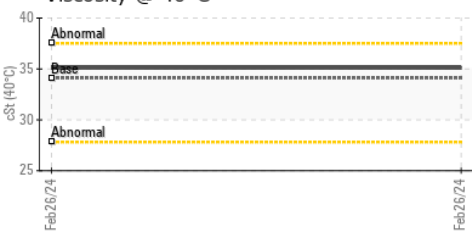

▲ Particle Count

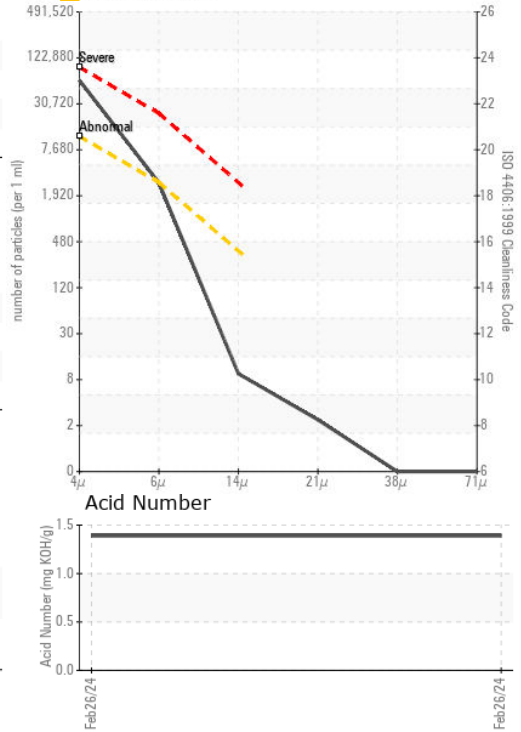

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : SBP0005140

Lab Number : 06101596

Unique Number : 10899826

Test Package : PLANT

Received : 27 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 29 Feb 2024 - Jonathan Hester

CERTIFIED TRANSMISSION

1801 S 54TH STREET

OMAHA, NE

US 68106

Contact: PRESTON JOHNSON

pjohnson@certifiedtransmission.com

T: (402)558-2117

F: (402)558-2202

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)