



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Machine Id  
**FTD DYNO 04**

Component  
**Transmission (Auto)**

Fluid  
**MOBIL MULTI-VEHICLE ATF (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>SBP0005139</b>	---	---
Sample Date	Client Info	<b>26 Feb 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>0</b>	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	---
Aluminum	ppm	ASTM D5185m >50	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185m >50	<b>0</b>	---
Copper	ppm	ASTM D5185m >225	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>62</b>	---
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185m	<b>7</b>	---
Calcium	ppm	ASTM D5185m	<b>133</b>	---
Phosphorus	ppm	ASTM D5185m	<b>185</b>	---
Zinc	ppm	ASTM D5185m	<b>8</b>	---
Sulfur	ppm	ASTM D5185m	<b>1039</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	---
Sodium	ppm	ASTM D5185m	<b>0</b>	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---
Water	%	ASTM D6304 >0.1	<b>0.024</b>	---
ppm Water	ppm	ASTM D6304 >1000	<b>240</b>	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>▲ 56302</b>	---	---
Particles >6µm	ASTM D7647 >2500	<b>● 4778</b>	---	---
Particles >14µm	ASTM D7647 >320	<b>26</b>	---	---
Particles >21µm	ASTM D7647 >80	<b>2</b>	---	---
Particles >38µm	ASTM D7647 >20	<b>0</b>	---	---
Particles >71µm	ASTM D7647 >4	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >20/18/15	<b>▲ 23/19/12</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.38</b>	---



# OIL ANALYSIS REPORT

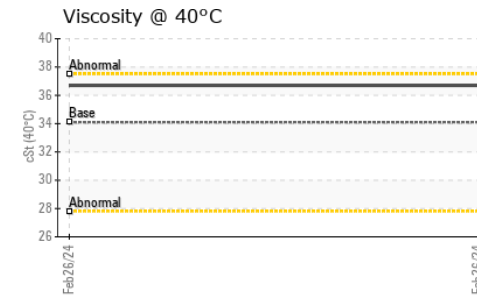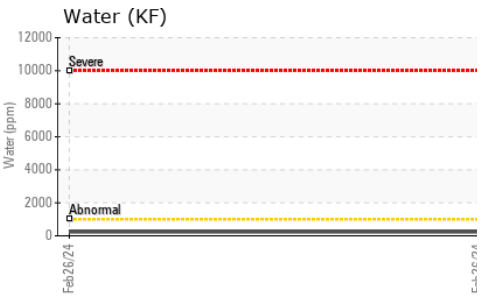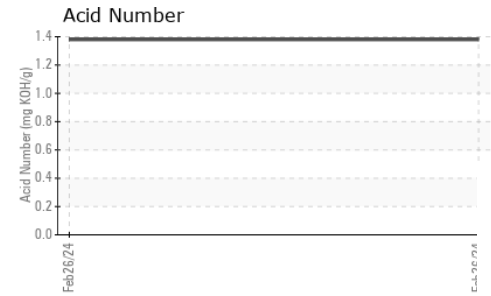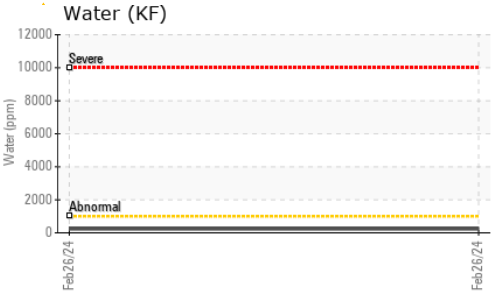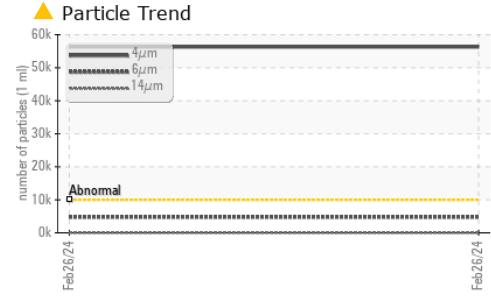





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	34.1	36.7	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

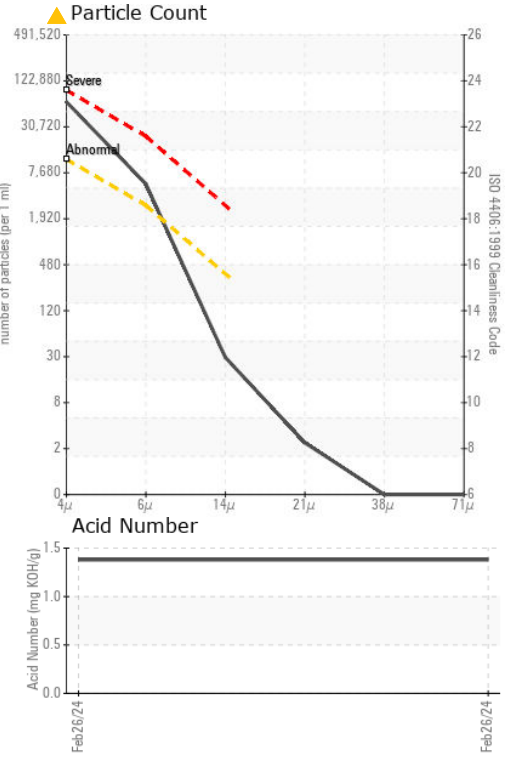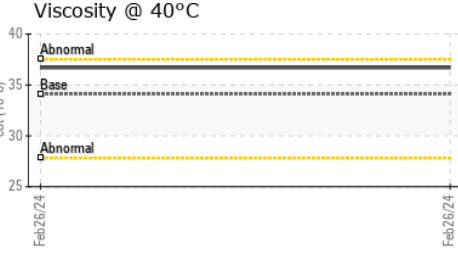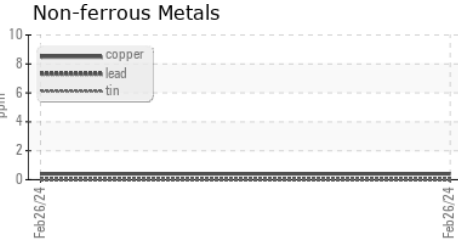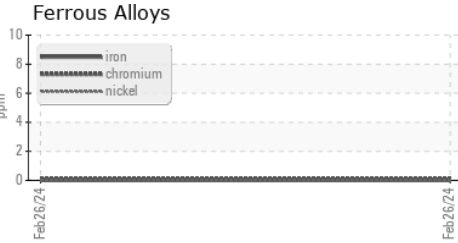

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005139      **Received** : 27 Feb 2024  
**Lab Number** : **06101597**      **Tested** : 28 Feb 2024  
**Unique Number** : 10899827      **Diagnosed** : 29 Feb 2024 - Jonathan Hester  
**Test Package** : PLANT

**CERTIFIED TRANSMISSION**  
 1801 S 54TH STREET  
 OMAHA, NE  
 US 68106  
 Contact: PRESTON JOHNSON  
 pjohnson@certifiedtransmission.com  
 T: (402)558-2117  
 F: (402)558-2202

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)