

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

FTD DYNO 02

Component Transmission (Auto) Fluid MOBIL MULTI-VEHICLE ATF (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORM				Feb2024		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		SBP0005142		
Sample Date		Client Info		26 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>160	0		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>50	<1		
_ead	ppm	ASTM D5185m	>50	0		
Copper	ppm	ASTM D5185m	>225	<1		
Tin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		67		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		5		
Calcium	ppm	ASTM D5185m		125		
Phosphorus	ppm	ASTM D5185m		189		
Zinc	ppm	ASTM D5185m		5		
Sulfur	ppm	ASTM D5185m		1079		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Vater	%	ASTM D6304	>0.1	0.028		
opm Water	ppm	ASTM D6304	>1000	281		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
		ASTM D7647	>10000	<mark>/</mark> 94224		
		ASTM D7647	>2500	<u> </u>		
Particles >6µm						
Particles >6μm Particles >14μm		ASTM D7647	>320	40		
Particles >6μm Particles >14μm		ASTM D7647 ASTM D7647		40 5		
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647				
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647	>80	5		
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20	5 0		
Particles >6μm Particles >14μm Particles >21μm Particles >38μm	TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	5 0 0		



(maa)

OIL ANALYSIS REPORT

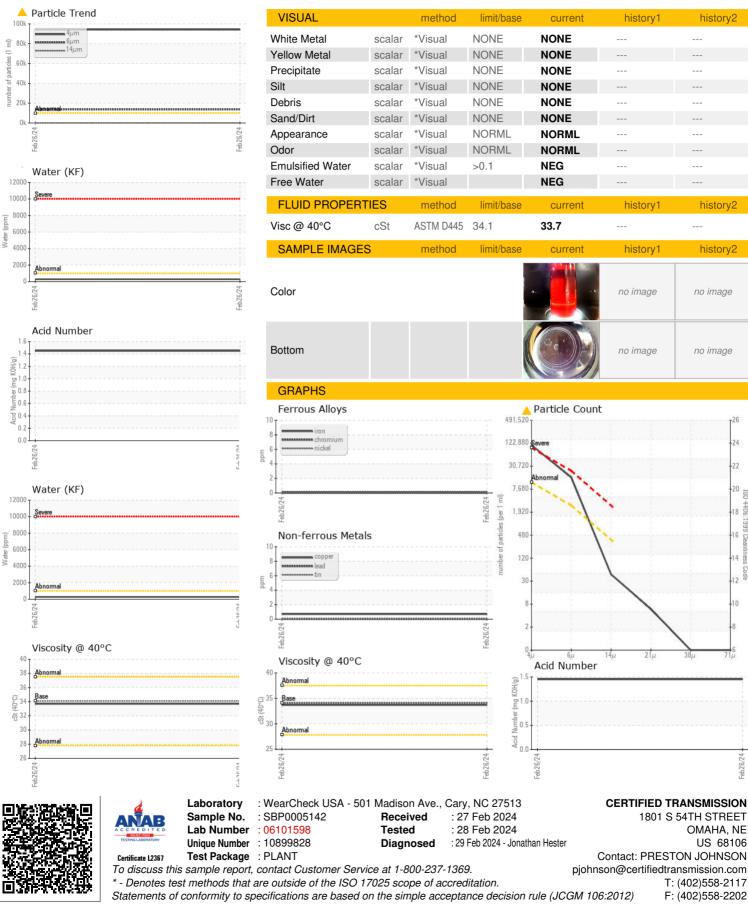

4406

:1999 Cle

14