

OIL ANALYSIS REPORT



ISO

KAESER 7182448

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Feb2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007271		
Sample Date		Client Info		08 Feb 2024		
Machine Age	hrs	Client Info		19027		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
_ead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	5		
Гin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	30		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	0		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	17196		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.015		
opm Water	ppm	ASTM D6304	>500	151		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		65692		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
· Particles >14μm		ASTM D7647	>80	A 1450		
Particles >21µm		ASTM D7647	>20	A 369		
· Particles >38μm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	1		
Dil Cleanliness		ISO 4406 (c)	>/17/13	A 23/22/18		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.39		



70 60

-50

30

ළ 은 201

10

0

12000

1000

800 (maa)

600 Water 400

200

1.20

(B/H0) E0.72

204

Poid 0.2

0.00

1000

600 Water (

4000

200

60

55

<u>ှ</u> 5(

-₹3 45 B

40

35

Ŭ

Se

Se


ah S

0/84a

ticles 40k

Built for a lifetime

OIL ANALYSIS REPORT

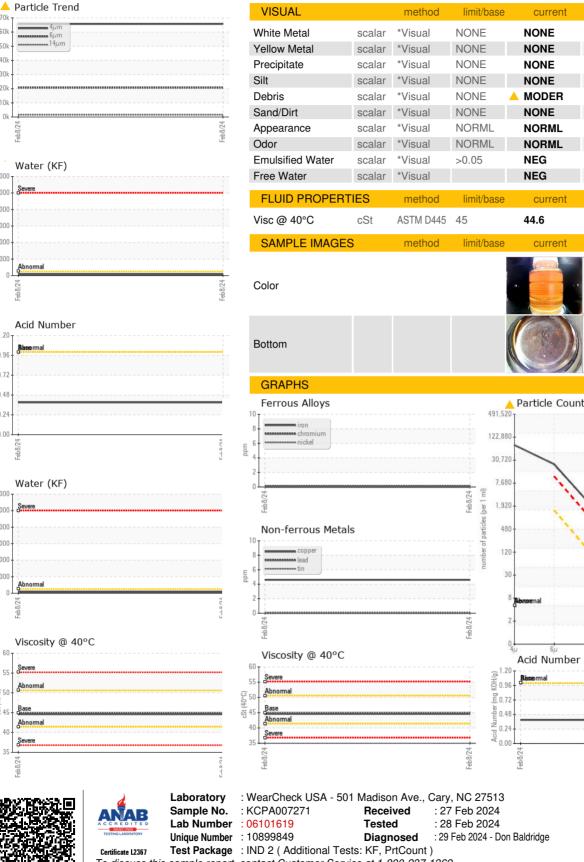

MAERSK LOGISTICS 401 WESTMONT DR SAN PEDRO, CA US 90731 Contact: Service Manager

214

38

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

history1

history

history1

no image

no image

history2

historv2

history2

no image

no imade

4406

:1999 Cle