




FUEL REPORT

Sample Rating Trend

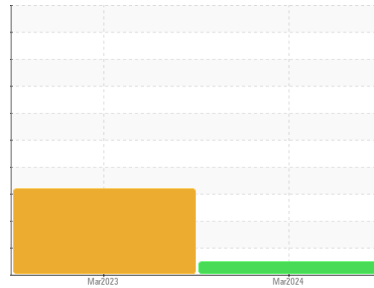

NORMAL



Machine Id
HF PALM BAY HOSPITAL DAY TANK

Component
Tank Diesel Fuel

Fluid
No.2 DIESEL FUEL (ULTRALOW SULPHUR) (500 GAL)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WCDF4536	WCDF4335	---
Sample Date	Client Info			11 Mar 2024	16 Mar 2023	---
Machine Age	mls	Client Info		0	0	---
Sample Status				NORMAL	ABNORMAL	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	0.839	---	0.843	---
Fuel Color	text	*Visual Screen	Yellow	Red	Red	---
ASTM Color	scalar	*ASTM D1500		L4.5	L4.5	---
Visc @ 40°C	cSt	ASTM D445	3.0	2.42	2.5	---
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	63.2	59	---
Cloud Point	°C	ASTM D5771		-12	-12	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	13	0	---
Sulfur (UVF)	ppm	ASTM D5453		14	22	---





DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	175	164	---
5% Distillation Point	°C	ASTM D86		199	191	---
10% Distill Point	°C	ASTM D86	201	208	203	---
15% Distillation Point	°C	ASTM D86		216	213	---
20% Distill Point	°C	ASTM D86	216	223	221	---
30% Distill Point	°C	ASTM D86	230	237	235	---
40% Distill Point	°C	ASTM D86	243	250	249	---
50% Distill Point	°C	ASTM D86	255	263	262	---
60% Distill Point	°C	ASTM D86	267	276	276	---
70% Distill Point	°C	ASTM D86	280	290	289	---
80% Distill Point	°C	ASTM D86	295	305	305	---
85% Distillation Point	°C	ASTM D86		315	315	---
90% Distill Point	°C	ASTM D86	310	325	326	---
95% Distillation Point	°C	ASTM D86		342	341	---
Final Boiling Point	°C	ASTM D86	341	355	351	---
Distillation Residue	%	ASTM D86	3.0	---	1.4	---
Distillation Loss	%	ASTM D86	3.0	---	0.5	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	36.3	36.4	---
Cetane Index		ASTM D4737	<40.0	48	47.7	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0	1	---
Sodium	ppm	ASTM D5185m	<0.1	<1	<1	---
Potassium	ppm	ASTM D5185m	<0.1	<1	0	---
Water	%	ASTM D6304	<0.05	0.004	0.010	---
ppm Water	ppm	ASTM D6304	<500	41	104.8	---
% Gasoline	%	*In-House	<0.50	0.0	0.0	---
% Biodiesel	%	*In-House	<20.0	0.0	0.0	---



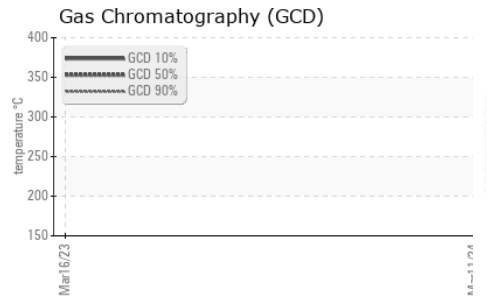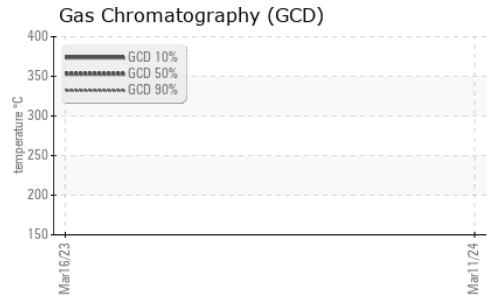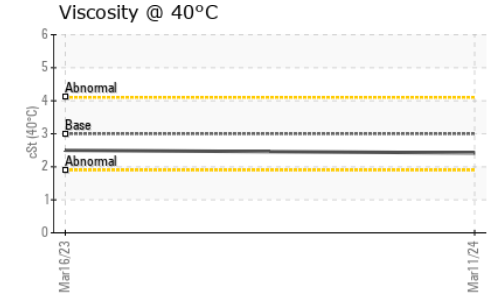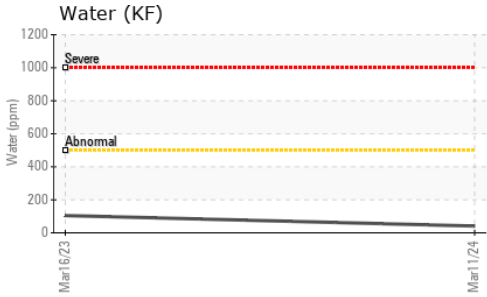



FUEL REPORT






HEAVY METALS	method	limit/base	current	history1	history2	
Aluminum	ppm	ASTM D5185m	<0.1	0	<1	---
Nickel	ppm	ASTM D5185m	<0.1	0	0	---
Lead	ppm	ASTM D5185m	<0.1	0	0	---
Vanadium	ppm	ASTM D5185m	<0.1	0	<1	---
Iron	ppm	ASTM D5185m	<0.1	0	0	---
Calcium	ppm	ASTM D5185m	<0.1	0	0	---
Magnesium	ppm	ASTM D5185m	<0.1	0	3	---
Phosphorus	ppm	ASTM D5185m	<0.1	0	6	---
Zinc	ppm	ASTM D5185m	<0.1	0	0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					



no image

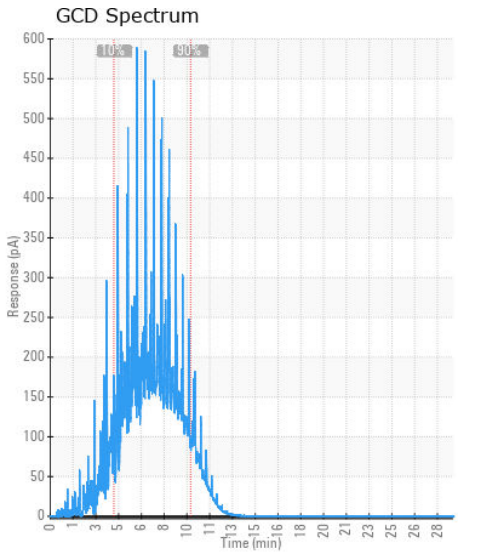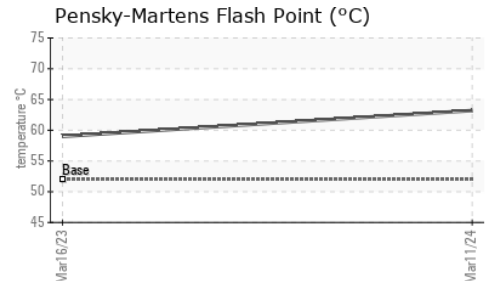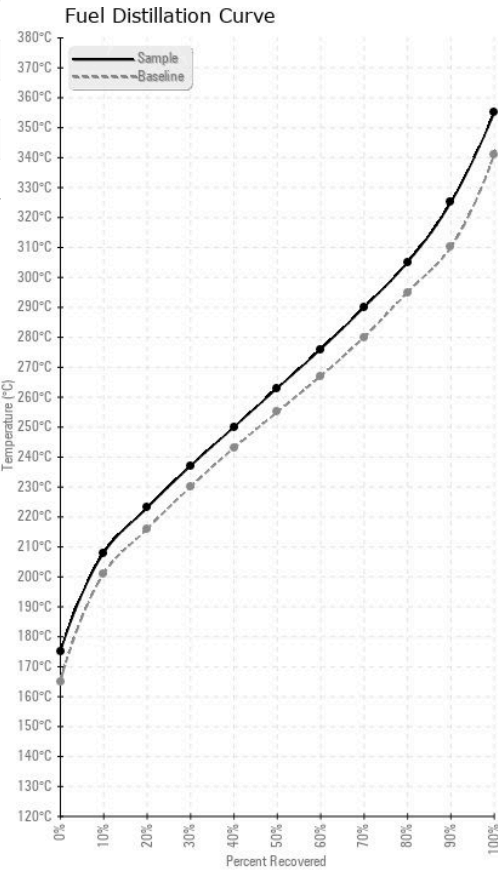

no image

GRAPHS



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCDF4536 **Received** : 18 Mar 2024
Lab Number : 06121309 **Tested** : 01 Apr 2024
Unique Number : 10930142 **Diagnosed** : 01 Apr 2024 - Doug Bogart
Test Package : DF-2 (Additional Tests: CldPt, Fuel, Screen)

TANK WIZARDS
 1511 MASTERS RD NW
 PALM BAY, FL
 US 32907
 Contact: WENDALL STRODERD
 wendall@tankwizards.com
 T: (321)427-5149
 F: (321)574-4131

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)