




OIL ANALYSIS REPORT

Sample Rating Trend

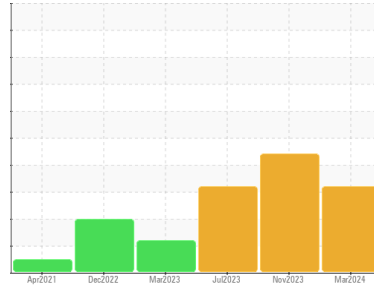

DEGRADATION



Area
SCHTRUCK
 Machine Id
6249 [SCHTRUCK]

Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil. There is a moderate amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	SBP0007062	SBP0005601	SBP0004693
Sample Date	Client Info	12 Mar 2024	01 Nov 2023	11 Jul 2023
Machine Age	mls Client Info	681075	653722	629695
Oil Age	mls Client Info	27353	24027	24901
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	44	63	52
Chromium	ppm ASTM D5185m >5	2	1	2
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	2	2	2
Lead	ppm ASTM D5185m >30	7	10	20
Copper	ppm ASTM D5185m >150	2	1	1
Tin	ppm ASTM D5185m >5	1	<1	2
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	6	1
Barium	ppm ASTM D5185m 0	0	5	0
Molybdenum	ppm ASTM D5185m 60	59	51	59
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	920	752	968
Calcium	ppm ASTM D5185m 1070	1119	1023	1149
Phosphorus	ppm ASTM D5185m 1150	958	813	948
Zinc	ppm ASTM D5185m 1270	1177	1011	1220
Sulfur	ppm ASTM D5185m 2060	3014	2564	3503

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	3	3	3
Sodium	ppm ASTM D5185m	8	8	9
Potassium	ppm ASTM D5185m >20	3	2	4
Fuel	% ASTM D3524 >5	▲ 7.0	▲ 8.8	▲ 7.4

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	▲ 3.1	▲ 4.1	▲ 3.6
Nitration	Abs/cm *ASTM D7624 >20	11.5	11.9	12.2
Sulfation	Abs/.1mm *ASTM D7415 >30	30.5	34.9	34.5


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	29.2	34.4	33.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 3.6	▲ 1.1	▲ 2.1




OIL ANALYSIS REPORT


▲ Fuel Dilution

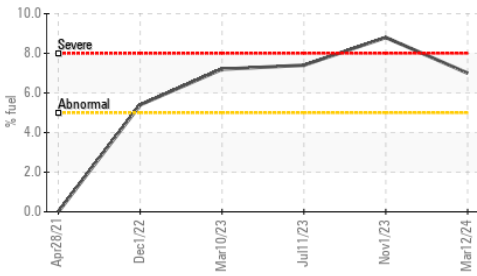


▲ Soot %

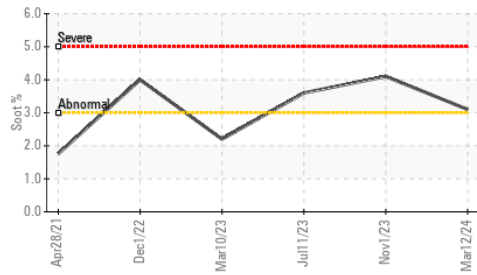

▲ Viscosity @ 100°C

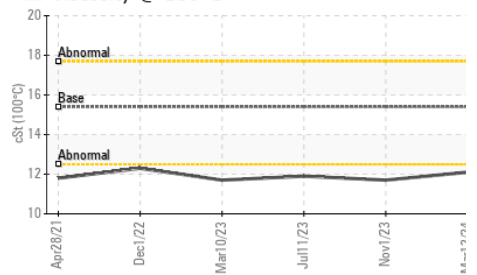





▲ Soot %

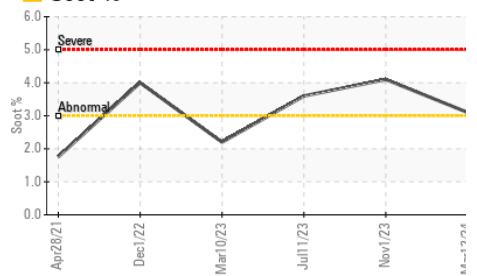

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.1	▲ 11.7	▲ 11.9

GRAPHS

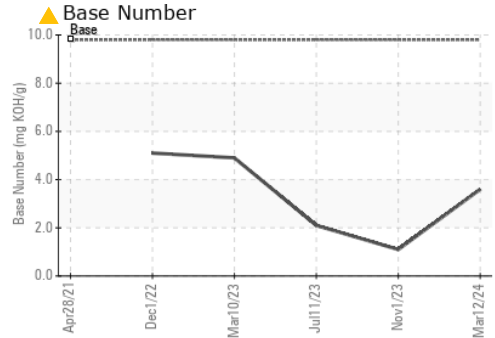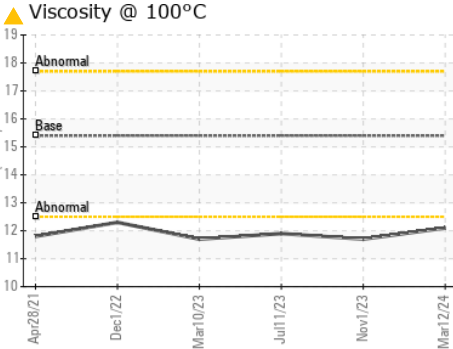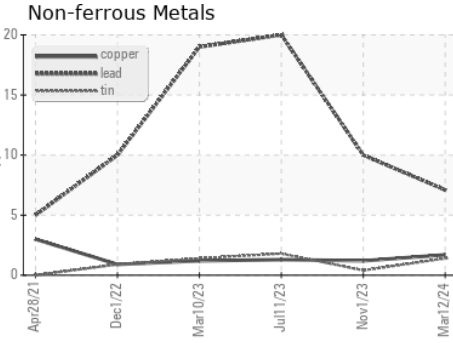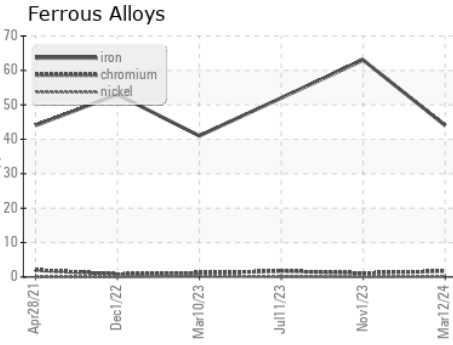

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007062 **Received** : 18 Mar 2024
Lab Number : 06121447 **Tested** : 22 Mar 2024
Unique Number : 10930280 **Diagnosed** : 22 Mar 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: PercentFuel)

SCHMIDT TRANSPORTATION - 605449
 108 E Bay Road
 Plattsmouth, NE
 US 68048
 Contact: NICK DOTY
 doty@liquidtrucking.com
 T: (402)949-9398
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)