




OIL ANALYSIS REPORT

Sample Rating Trend

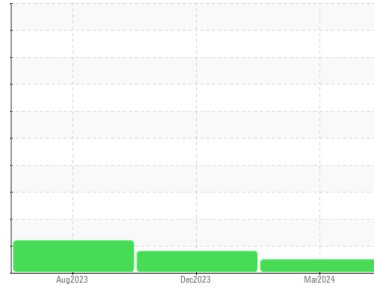

NORMAL



Area
SCHTRUCK
 Machine Id
6431 [SCHTRUCK]

Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0007064	SBP0005966	SBP0005086
Sample Date	Client Info		12 Mar 2024	06 Dec 2023	15 Aug 2023
Machine Age	hrs	Client Info	111369	73670	36102
Oil Age	hrs	Client Info	37699	37568	36102
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	0.5
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	37	57	70
Chromium	ppm	ASTM D5185m	>20	2	3	4
Nickel	ppm	ASTM D5185m	>2	<1	1	1
Titanium	ppm	ASTM D5185m	>2	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>30	12	26	42
Lead	ppm	ASTM D5185m	>30	0	<1	2
Copper	ppm	ASTM D5185m	>30	22	▲ 53	▲ 250
Tin	ppm	ASTM D5185m	>15	<1	2	4
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<1	3	24
Barium	ppm	ASTM D5185m	0	0	12	0
Molybdenum	ppm	ASTM D5185m	60	67	60	47
Manganese	ppm	ASTM D5185m	0	<1	2	4
Magnesium	ppm	ASTM D5185m	1010	1061	904	606
Calcium	ppm	ASTM D5185m	1070	1194	1225	1804
Phosphorus	ppm	ASTM D5185m	1150	1112	972	751
Zinc	ppm	ASTM D5185m	1270	1353	1184	933
Sulfur	ppm	ASTM D5185m	2060	2651	2311	1964

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	6	8	8
Sodium	ppm	ASTM D5185m		3	1	7
Potassium	ppm	ASTM D5185m	>20	26	73	119

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.7	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	10.3	12.5	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	24.3	23.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.6	26.3	28.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	5.9	4.6	5.8







OIL ANALYSIS REPORT

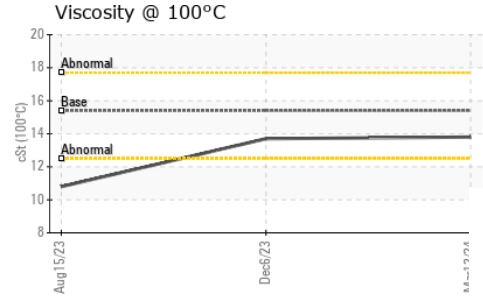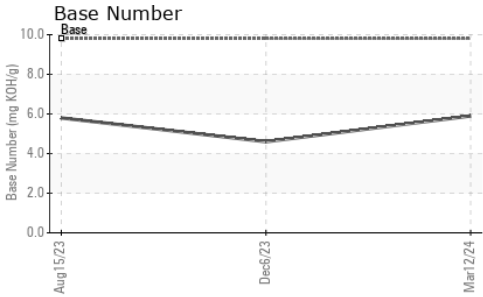

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.7	10.8

GRAPHS

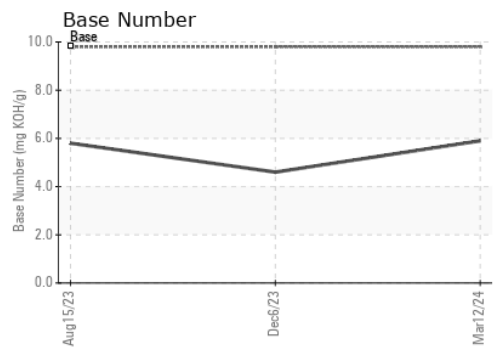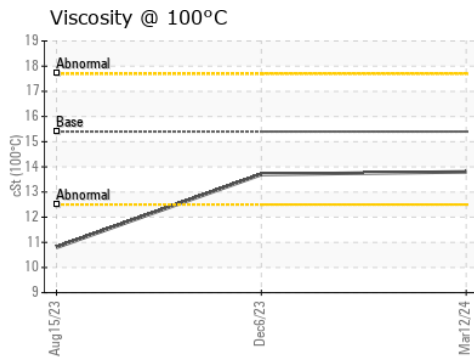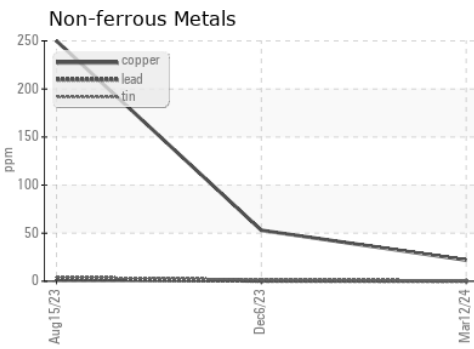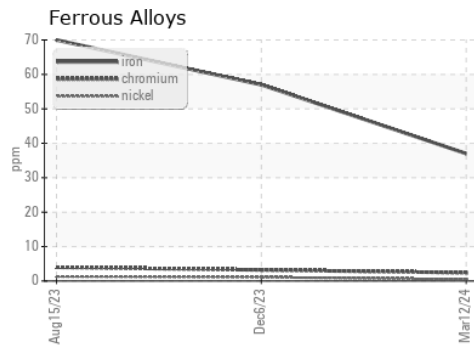

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007064 **Received** : 18 Mar 2024
Lab Number : 06121450 **Tested** : 19 Mar 2024
Unique Number : 10930283 **Diagnosed** : 19 Mar 2024 - Wes Davis
Test Package : FLEET

SCHMIDT TRANSPORTATION - 605449
 108 E Bay Road
 Plattsmouth, NE
 US 68048
 Contact: NICK DOTY
 doty@liquidtrucking.com
 T: (402)949-9398
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)