

# **OIL ANALYSIS REPORT**


# **CAMERON** [200004662]

**C-17** 

Component

**Wind Turbine Gearbox** 

**FUCHS RENOLIN UNISYN CLP 320 (--- LTR)** 

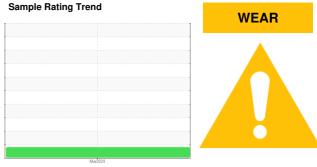

## **DIAGNOSIS**

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

The iron level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

)				Mar2024		
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX015439		
Sample Date		Client Info		05 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>50	16		
ron	ppm	ASTM D5185m	>30	<u>^</u> 70		
Chromium	ppm	ASTM D5185m	>3	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>10	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>30	<1		
Lead	ppm	ASTM D5185m	>15	2		
Copper	ppm	ASTM D5185m	>10	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		205		
Zinc	ppm	ASTM D5185m		55		
Sulfur	ppm	ASTM D5185m		4767		
CONTAMINANT			limit/base		hiotonyt	hiotonyO
		method		current	history1	history2
Silicon	ppm	ASTM D5185m	>+15	<1		
Sodium	ppm	ASTM D5185m		20		
Potassium	ppm	ASTM D5185m	>20	4		
Nater	%	ASTM D6304		0.008		
opm Water	ppm	ASTM D6304	>200	82		
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		707		
Particles >6µm		ASTM D7647	>320	194		
Particles >14µm		ASTM D7647	>40	24		
Particles >21µm		ASTM D7647	>10	6		
Particles >38µm		ASTM D7647	>3	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/15/12	17/15/12		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2


Acid Number (AN)


mg KOH/g ASTM D8045 0.6

Contact/Location: DEVIN LINEHAN - NORDEX



## **OIL ANALYSIS REPORT**

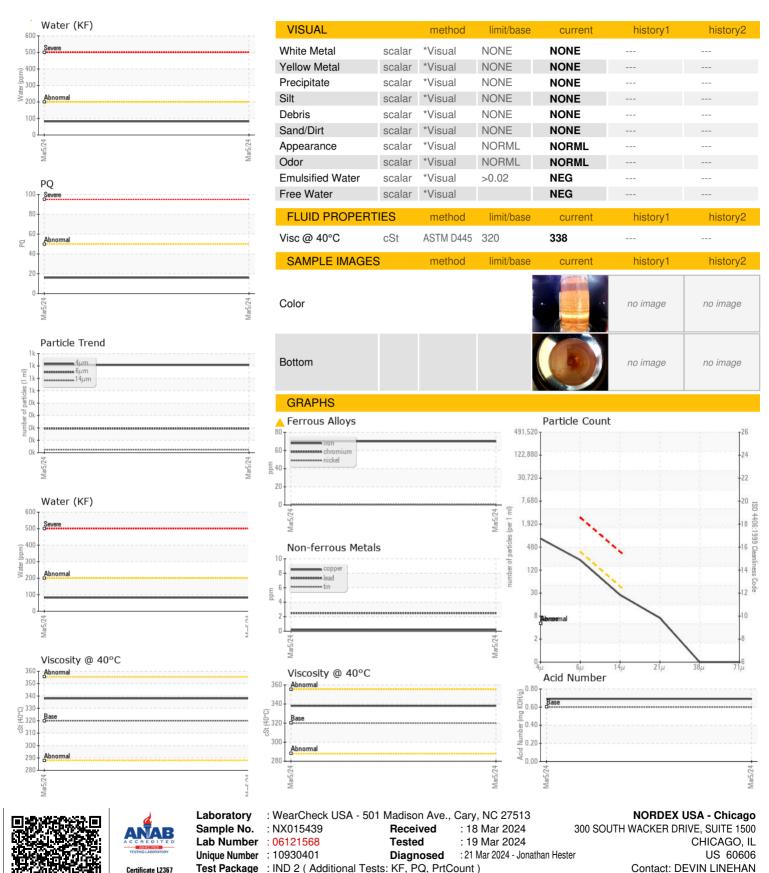



To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DLinehan@nordex-online.com

T: (312)386-4124

F: (312)386-7102