



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id
MAIN FREEZER GRBX (S/N RA0630-14)

Component
Gearbox
Fluid

FUCHS CASSIDA GL 680 (--- GAL)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

● Fluid Condition

Viscosity of sample indicates oil is within ISO 220 range. Confirmed. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USP0006091	---	---
Sample Date	Client Info	17 Mar 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>200	2	---	---
Chromium ppm ASTM D5185m	>15	0	---	---
Nickel ppm ASTM D5185m	>15	0	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>25	0	---	---
Lead ppm ASTM D5185m	>100	0	---	---
Copper ppm ASTM D5185m	>200	0	---	---
Tin ppm ASTM D5185m	>25	0	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		0	---	---
Manganese ppm ASTM D5185m		0	---	---
Magnesium ppm ASTM D5185m		0	---	---
Calcium ppm ASTM D5185m		13	---	---
Phosphorus ppm ASTM D5185m		472	---	---
Zinc ppm ASTM D5185m		0	---	---
Sulfur ppm ASTM D5185m		589	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>50	<1	---	---
Sodium ppm ASTM D5185m		0	---	---
Potassium ppm ASTM D5185m	>20	0	---	---
Water % ASTM D6304	>0.2	0.001	---	---
ppm Water ppm ASTM D6304	>2000	0	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>20000	▲ 41366	---	---
Particles >6µm ASTM D7647	>5000	● 5884	---	---
Particles >14µm ASTM D7647	>640	173	---	---
Particles >21µm ASTM D7647	>160	29	---	---
Particles >38µm ASTM D7647	>40	0	---	---
Particles >71µm ASTM D7647	>10	0	---	---
Oil Cleanliness ISO 4406 (c)	>21/19/16	▲ 23/20/15	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		0.39	---	---



OIL ANALYSIS REPORT

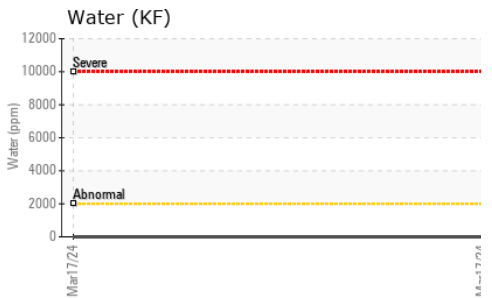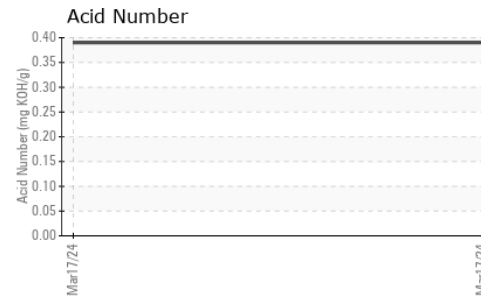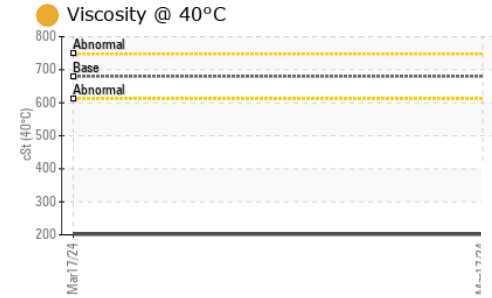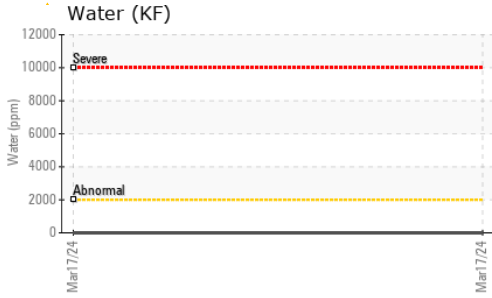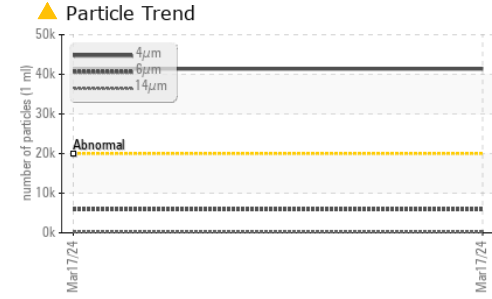





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 680	201.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

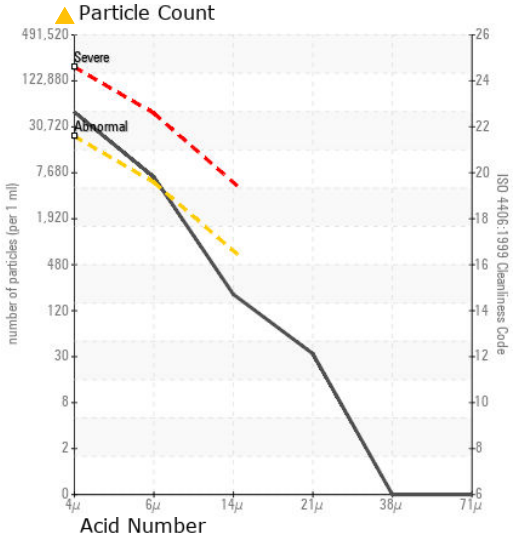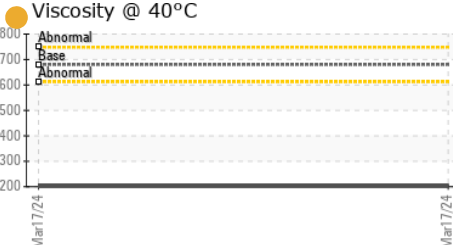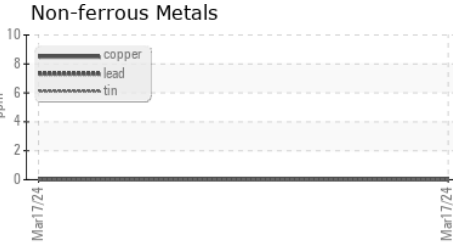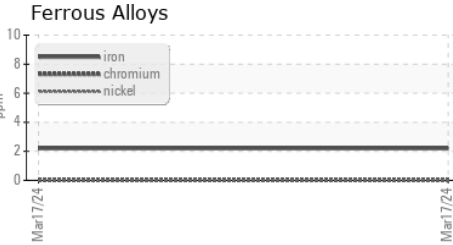

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : USP0006091
 Lab Number : **06121618**
 Unique Number : 10930451
 Test Package : IND 2

Received : 18 Mar 2024
 Tested : 21 Mar 2024
 Diagnosed : 21 Mar 2024 - Doug Bogart

TYSON DOSK -HUTCHINSON - USP

HUTCHINSON, KS
 US
 Contact: SCOTT OWEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (620)669-2871

F: