




# OIL ANALYSIS REPORT



Area  
**KANSAS/44/SKIDSTEER**  
Machine Id  
**53.150L [KANSAS^44^SKIDSTEER]**  
Component  
**Rear Right Final Drive**  
Fluid  
**MOBIL MOBILUBE HD PLUS 75W90 (0 GAL)**

Sample Rating Trend

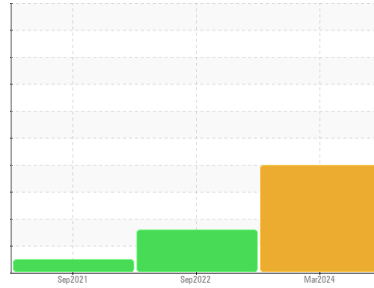

## DIAGNOSIS

### Recommendation

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

### Wear

Gear wear is indicated.

### Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0779816</b>	WC0673584	WC0584678
Sample Date	Client Info		<b>11 Mar 2024</b>	19 Sep 2022	13 Sep 2021
Machine Age	Client Info		<b>1616</b>	1616	1164
Oil Age	Client Info		<b>0</b>	452	1030
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>500	<b>▲ 1084</b>	▲ 611	359
Chromium	ppm ASTM D5185m	>10	<b>▲ 12</b>	▲ 10	5
Nickel	ppm ASTM D5185m	>10	<b>1</b>	0	0
Titanium	ppm ASTM D5185m		<b>2</b>	<1	<1
Silver	ppm ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m	>25	<b>● 19</b>	8	1
Lead	ppm ASTM D5185m	>25	<b>0</b>	0	<1
Copper	ppm ASTM D5185m	>50	<b>3</b>	3	1
Tin	ppm ASTM D5185m	>10	<b>0</b>	<1	0
Antimony	ppm ASTM D5185m	>5	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		<b>103</b>	245	120
Barium	ppm ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm ASTM D5185m		<b>9</b>	5	2
Magnesium	ppm ASTM D5185m		<b>6</b>	2	<1
Calcium	ppm ASTM D5185m		<b>41</b>	23	5
Phosphorus	ppm ASTM D5185m		<b>1352</b>	2011	1125
Zinc	ppm ASTM D5185m		<b>26</b>	39	35
Sulfur	ppm ASTM D5185m		<b>18720</b>	26631	18517

## CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>75	<b>▲ 109</b>	28	6
Sodium	ppm ASTM D5185m		<b>4</b>	6	5
Potassium	ppm ASTM D5185m	>20	<b>9</b>	2	<1

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

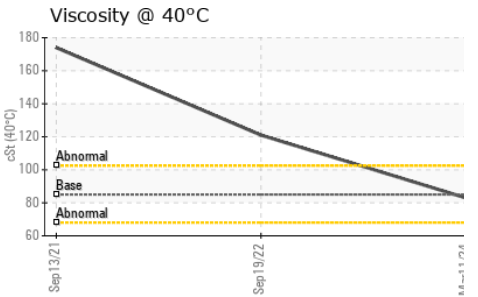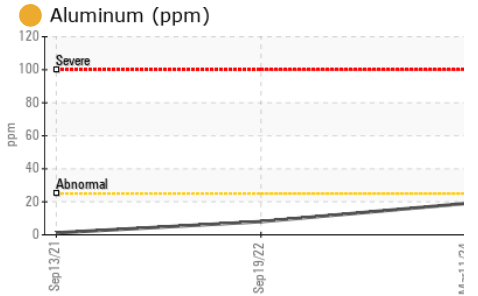
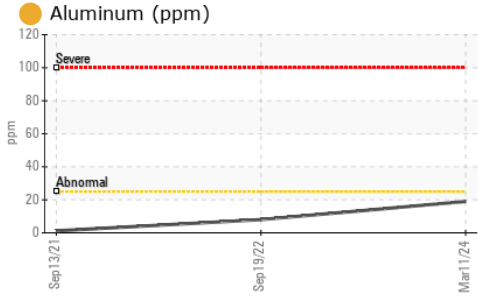
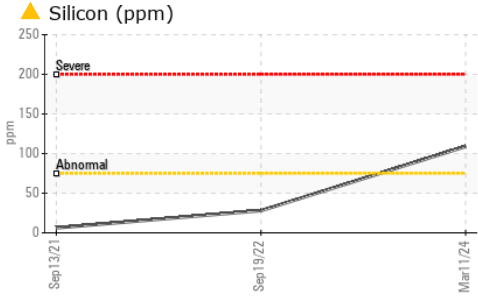


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 85	<b>83.0</b>	121	174

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

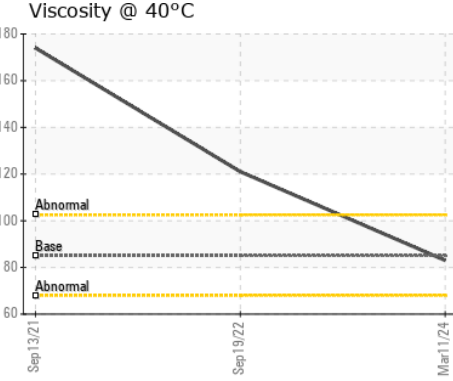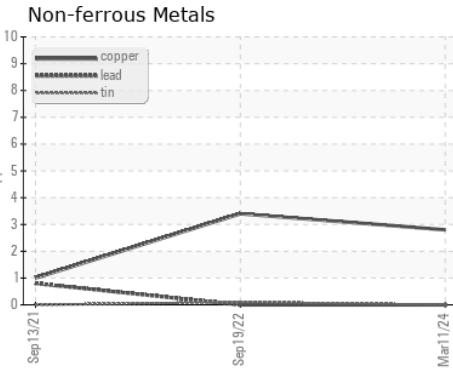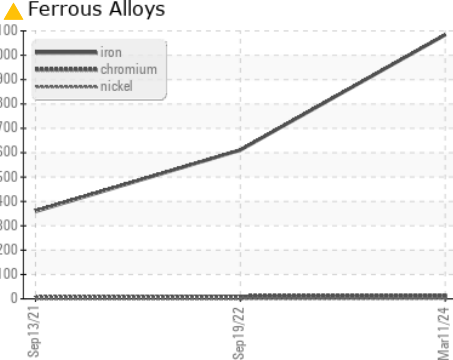

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0779816      **Received** : 18 Mar 2024  
**Lab Number** : **06121805**      **Tested** : 19 Mar 2024  
**Unique Number** : 10935956      **Diagnosed** : 21 Mar 2024 - Jonathan Hester  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)