




COOLANT REPORT

Sample Rating Trend

NORMAL



Area
KANSAS/44
 Machine Id
53.161L [KANSAS^44]
 Component
Coolant
 Fluid
EXTENDED LIFE COOLANT (4 GAL)

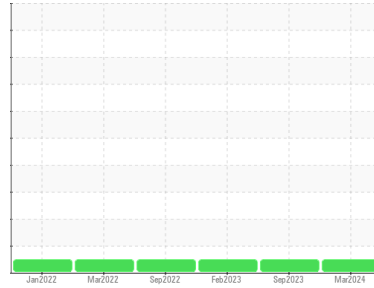

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The fluid is suitable for further service.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

Carboxylate test failed. The glycol level is acceptable. The pH level of this fluid is within the acceptable limits.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0901312	WC0673520	WC0741729
Sample Date	Client Info		11 Mar 2024	28 Sep 2023	27 Feb 2023
Machine Age	hrs	Client Info	1350	981	580
Oil Age	hrs	Client Info	1350	981	580
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

PHYSICAL TEST RESULTS

	method	limit/base	current	history1	history2
Glycol Type	FT-IR		---	---	---
Specific Gravity	*ASTM D1298		1.066	1.066	1.066
pH	Scale 0-14	ASTM D1287	7.53	7.38	7.71
Nitrites	ppm	AP-053:2009	676	560	412
Reserve Alkalinity	Scale 0-20	*ASTM D1121	---	---	---
Percentage Glycol	%	ASTM D3321	49.1	49.0	49.0
Freezing Point	°F	ASTM D3321	-33	-33	-33
Total Dissolved Solids			355.0	358.5	311.5
Carboxylate			fail	fail	pass

CORROSION INHIBITORS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D6130	7	6	36
Phosphorus	ppm	ASTM D6130	2	<1	68
Boron	ppm	ASTM D6130	0	4	14
Molybdenum	ppm	ASTM D6130	547	502	1001

CORROSION

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D6130	>15	3	1	0
Aluminum	ppm	ASTM D6130	>10	<1	1	<1
Copper	ppm	ASTM D6130	>10	<1	2	1
Lead	ppm	ASTM D6130	>10	<1	<1	1
Tin	ppm	ASTM D6130	>10	0	1	2
Zinc	ppm	ASTM D6130		2	3	2

CONTAMINANTS

	method	limit/base	current	history1	history2	
Chlorine	ppm	ASTM D6130		14	13	52

CARRIER SALTS


	method	limit/base	current	history1	history2	
Sodium	ppm	ASTM D6130		3553	3503	5968
Potassium	ppm	ASTM D6130		553	478	1290

SCALE POTENTIAL

	method	limit/base	current	history1	history2	
Calcium	ppm	ASTM D6130		2	3	2
Magnesium	ppm	ASTM D6130		0	1	1









COOLANT REPORT

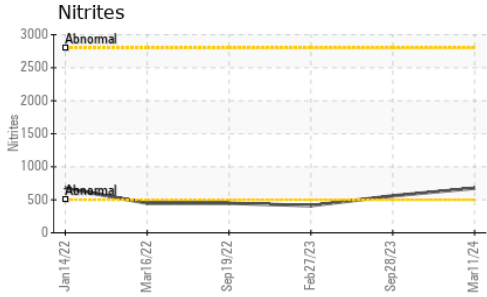

VISUAL	method	limit/base	current	history1	history2
Coolant Color	*Visual		Red	Red	Red
Coolant Appearance	*Visual	Clear	normal	normal	normal
Color					
Bottom					

GRAPHS

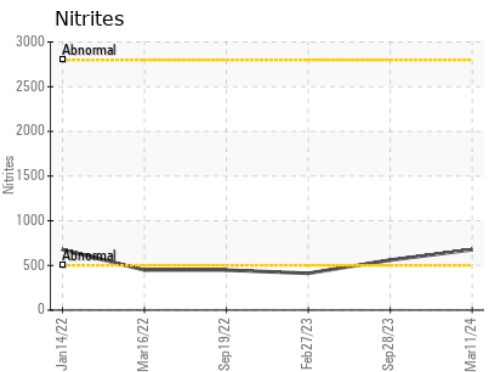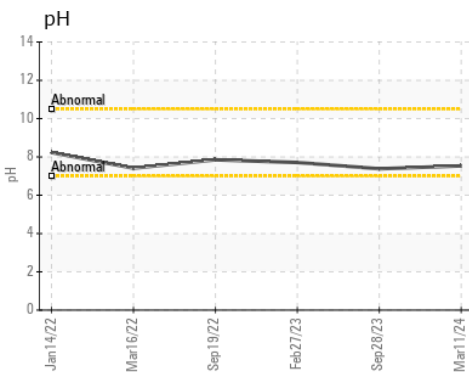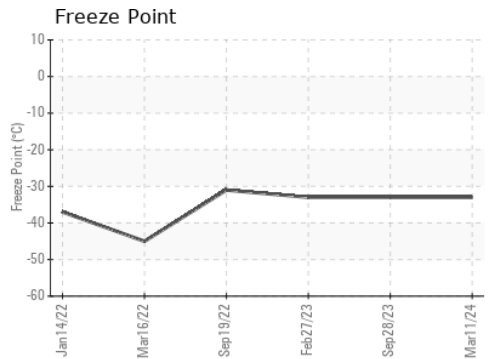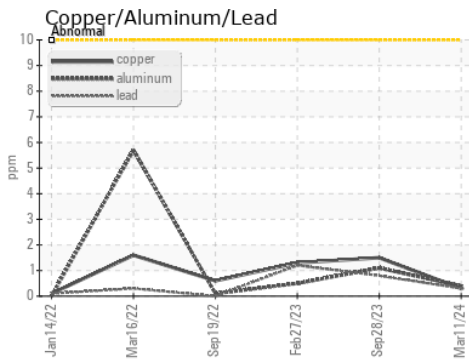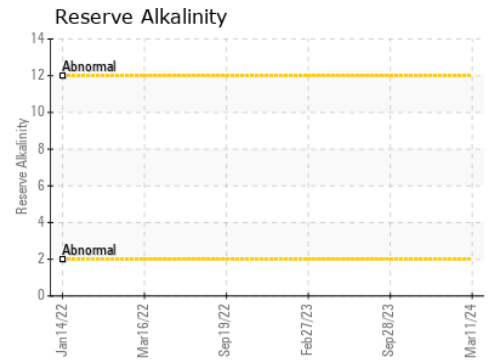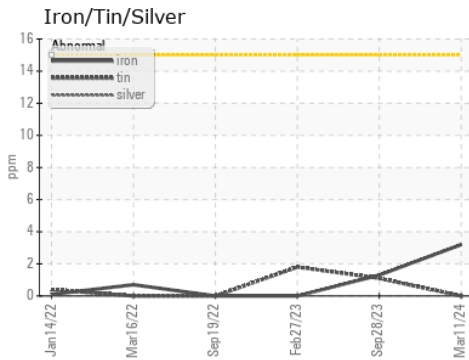

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0901312 **Received** : 18 Mar 2024
Lab Number : 06121908 **Tested** : 21 Mar 2024
Unique Number : 10936059 **Diagnosed** : 21 Mar 2024 - Jonathan Hester
Test Package : COOL- (Additional Tests: BoilingPoint, COOL, GlycolType, ICP)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net
 T: (316)943-6491
 F: x: