




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

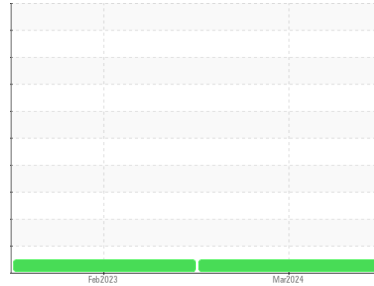

Machine Id  
**26748 - E401**

Component  
**Diesel Engine**

Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0753816</b>	WC0753820	---
Sample Date	Client Info		<b>13 Mar 2024</b>	27 Feb 2023	---
Machine Age	hrs	Client Info	<b>7551</b>	6787	---
Oil Age	hrs	Client Info	<b>500</b>	692	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>22</b>	4	---
Chromium	ppm	ASTM D5185m >20	<b>3</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>13</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>6</b>	1	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>79</b>	184	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 0	<b>47</b>	13	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 0	<b>301</b>	73	---
Calcium	ppm	ASTM D5185m	<b>1853</b>	1995	---
Phosphorus	ppm	ASTM D5185m	<b>950</b>	944	---
Zinc	ppm	ASTM D5185m	<b>1221</b>	1120	---
Sulfur	ppm	ASTM D5185m	<b>3499</b>	3334	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	3	---
Sodium	ppm	ASTM D5185m	<b>2</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>4</b>	7	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	6.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	21.2	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>6.4</b>	8.6	---











# OIL ANALYSIS REPORT

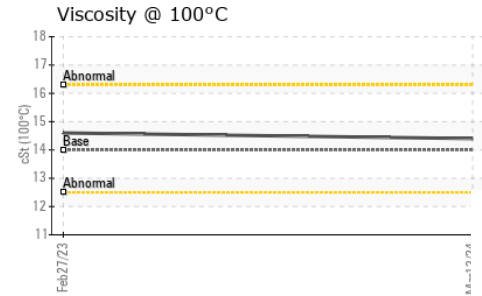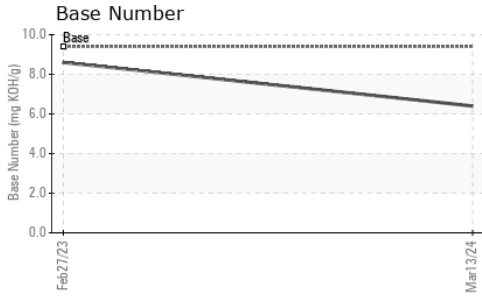

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>14.4</b>	14.6	---

## GRAPHS

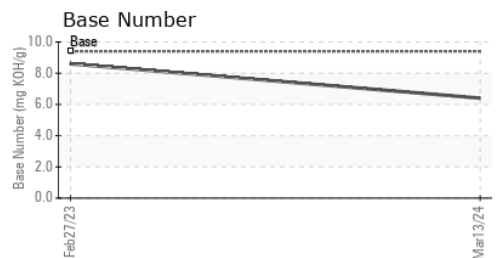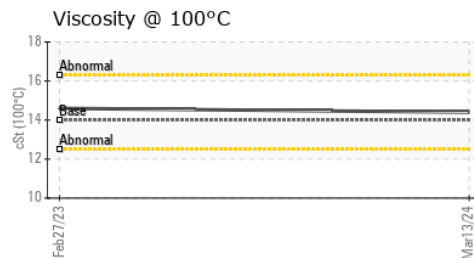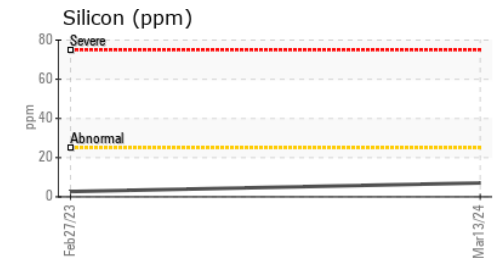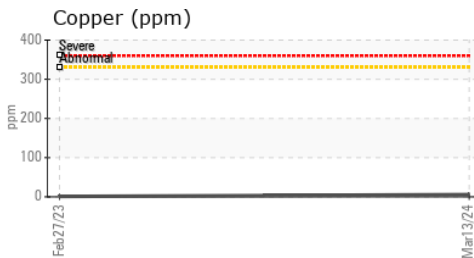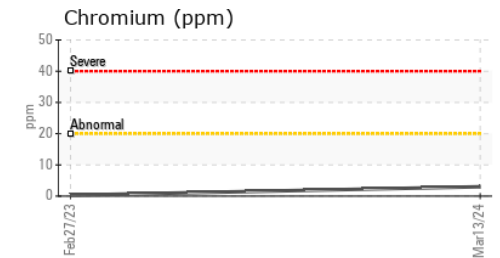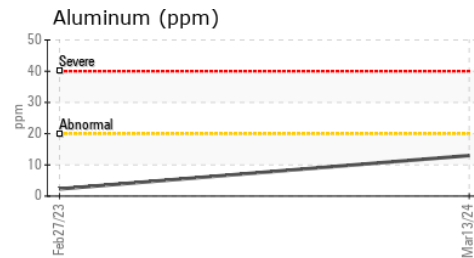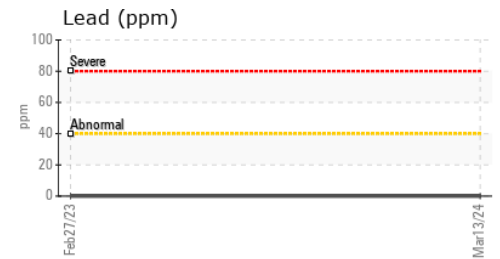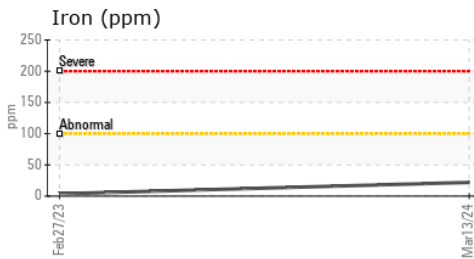

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0753816      **Received** : 19 Mar 2024  
**Lab Number** : **06122165**      **Tested** : 20 Mar 2024  
**Unique Number** : 10936316      **Diagnosed** : 20 Mar 2024 - Wes Davis  
**Test Package** : MOBCE ( Additional Tests: TBN )

**SIDDONS-MARTIN EMERGENCY GROUP**  
 2517 NAIL RD  
 KRUM, TX  
 US 76249  
 Contact: TODD WAYMAN  
 twayman@siddons-martin.com  
 T: (940)382-9600  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)