

OIL ANALYSIS REPORT

KAESER DSD200 6946139 (S/N 1090) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

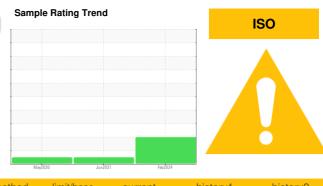

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06122321	KC05291264	KC72434
Sample Date		Client Info		21 Feb 2024	17 Jun 2021	21 May 2020
Machine Age	hrs	Client Info		10361	4235	2046
Oil Age	hrs	Client Info		0	3251	2046
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	2
Copper	ppm	ASTM D5185m		9	2	2
Tin	ppm	ASTM D5185m	>10	ء <1	0	0
Antimony	ppm	ASTM D5185m	- 10		0	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm					-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	16	0
Barium	ppm	ASTM D5185m	90	0	0	12
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	0	46	56
Calcium	ppm	ASTM D5185m	2	0	0	1
Phosphorus				0		
Zinc	ppm	ASTM D5185m		U	4	2
CONTAMINANTS	ppm ppm	ASTM D5185m ASTM D5185m		0	4 5	2 5
Silicon	ppm		limit/base			
	ppm	ASTM D5185m	limit/base	0	5	5
Sodium	ppm	ASTM D5185m method		0 current	5 history1	5 history2
	ppm ppm	ASTM D5185m method ASTM D5185m		0 current 0	5 <mark>history1</mark> 0	5 history2 0
Sodium	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	>25 >20	0 current 0 0	5 history1 0 12	5 history2 0 9
Sodium Potassium	ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	0 current 0 0 0	5 history1 0 12 2	5 history2 0 9 <1
Sodium Potassium Water	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	0 current 0 0 0 0 0.001	5 history1 0 12 2 0.019	5 history2 0 9 <1 0.025
Sodium Potassium Water ppm Water	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	0 current 0 0 0 0 0.001 15	5 history1 0 12 2 0.019 193.5	5 history2 0 9 <1 0.025 253.2
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	0 current 0 0 0 0.001 15 current	5 history1 0 12 2 0.019 193.5 history1	5 history2 0 9 <1 0.025 253.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647	>25 >20 >0.05 >500 limit/base	0 current 0 0 0 0.001 15 current 4740	5 history1 0 12 2 0.019 193.5 history1 1659	5 history2 0 9 <1 0.025 253.2 history2 385
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	0 current 0 0 0 0.001 15 current 4740 ▲ 2163	5 history1 0 12 2 0.019 193.5 history1 1659 524	5 history2 0 9 <1 0.025 253.2 history2 385 111
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	0 current 0 0 0 0.001 15 current 4740 ▲ 2163 ▲ 354	5 history1 0 12 2 0.019 193.5 history1 1659 524 43	5 history2 0 9 <1 0.025 253.2 history2 385 111 19
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	0 current 0 0 0 0.001 15 current 4740 ▲ 2163 354 ▲ 112	5 history1 0 12 2 0.019 193.5 history1 1659 524 43 10	5 history2 0 9 <1 0.025 253.2 history2 385 111 19 7
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	0 current 0 0 0.001 15 current 4740 ▲ 2163 ▲ 354 ▲ 112 ▲ 7	5 history1 0 12 2 0.019 193.5 history1 1659 524 43 10 0	5 history2 0 9 <1 0.025 253.2 history2 385 111 19 7 0
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 METHOD ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	0 current 0 0 0.001 15 current 4740 ▲ 2163 ▲ 354 ▲ 112 ▲ 7 1	5 history1 0 12 2 0.019 193.5 history1 1659 524 43 10 0 0	5 history2 0 9 <1 0.025 253.2 history2 385 111 19 7 0 0 0

0.391 0.370



OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

method

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

method

ASTM D445

method

scalar *Visual

scalar *Visual

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

>0.05

46

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

curren

current

Particle Count

Acid Number

491 520 122,880

> 30,720 7,680

> > 480

120

30

(B) 0.50 HOX 0.40

Ē 0.30

ළි 0.20

2 0.10

0.00

Feb21/24.

Feb21/24

Feb21/24

: 19 Mar 2024

: 20 Mar 2024

: 21 Mar 2024 - Don Baldridge

(per 1 1,920 NEG

NEG

44.5

history1

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NFG

NEG

44.7

history

history1

history2

NONE

NONE

NONE

NONE

VLITE

NONE

NORML

NORML

history2

history2

NEG

NEG

44.4

VISUAL

White Metal

Yellow Metal

Precipitate

Silt

Debris

Odor

Color

Bottom

GRAPHS Ferrous Alloys

(Jav)

10

55

50

35

B 45

00

Vav71

Abnorma 40

licke

Non-ferrous Metals

Viscosity @ 40°C

Sand/Dirt

Appearance


Free Water


Visc @ 40°C


Emulsified Water

FLUID PROPERTIES

SAMPLE IMAGES

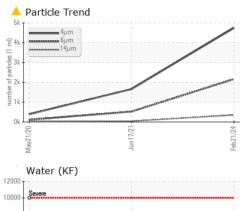



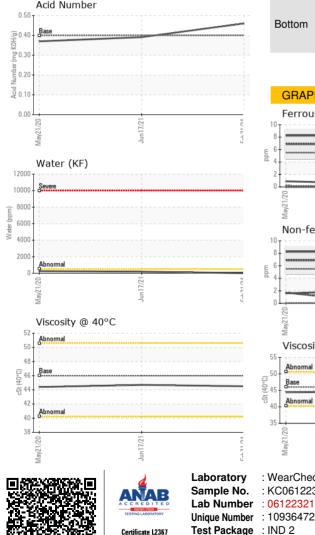

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: KC06122321

: 06122321

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Jun17/2

Jun17/21

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Diagnosed

Tested

20 3

40

6661

lun17/21

BLUE SKY QUARRY

133 ROCKY DR

CARLTON, GA

US 30635

Contact: