

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

# KAESER CSD 100 3445805 (S/N 1218)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Aug2012	Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015506	KC23427	
Sample Date		Client Info		08 Mar 2024	09 Aug 2012	
Machine Age	hrs	Client Info		91408	13171	
Oil Age	hrs	Client Info		6000	7500	
Oil Changed	1113	Client Info		Not Changd	N/A	
Sample Status		Olletti Ittio		ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base			
				current	history1	history2
Iron Chromium	ppm	ASTM D5185m ASTM D5185m	>50 >10	0	<1 0	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	√ <1	<1	
Lead		ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	9	8	
Tin	ppm	ASTM D5185m	>10	ء <1	0	
Antimony	ppm	ASTM D5185m	>10		0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium		ASTM D5185m		0	0	
	ppm			U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	3	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	90	30	0	
Calcium	ppm	ASTM D5185m	2	0	0	
Phosphorus	ppm	ASTM D5185m		0	0	
Zinc	ppm	ASTM D5185m		0	7	
Sulfur	ppm	ASTM D5185m		20740	19553	
CONTAMINANTS	1	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	
Sodium	ppm	ASTM D5185m		16	<1	
Potassium	ppm	ASTM D5185m	>20	0	0	
Water	%	ASTM D6304	>0.05	0.010	0.009	
ppm Water	ppm	ASTM D6304	>500	107	90	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		80270	2525	
Particles >6µm		ASTM D7647	>1300	<u></u> 35141	1375	
Particles >14µm		ASTM D7647	>80	<b>△</b> 5655	<u>^</u> 234	
Particles >21µm		ASTM D7647	>20	<u> </u>	<b>△</b> 79	
Particles >38µm		ASTM D7647	>4	<u>^</u> 24	<b>▲</b> 12	
Particles >71μm		ASTM D7647	>3	0	1	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>4</b> 24/22/20	<b>△</b> 18/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.39	0.544	



# **OIL ANALYSIS REPORT**

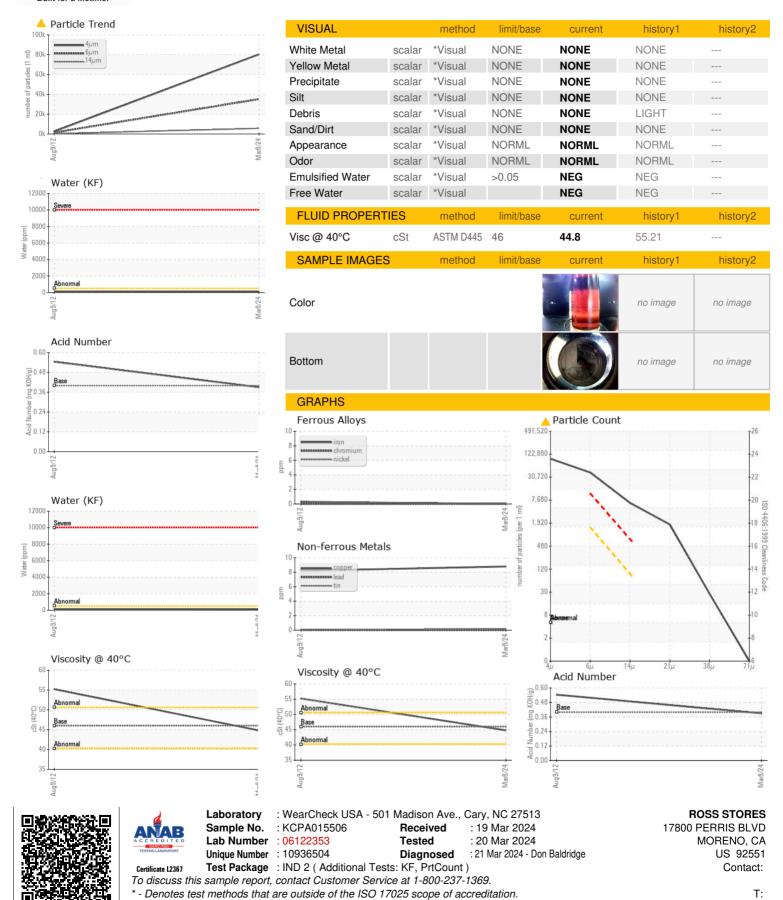

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: