


# **OIL ANALYSIS REPORT**

Sample Rating Trend

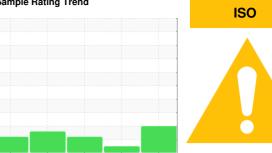

# KAESER AS 25T 4374729 (S/N 1024)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Mar2018	Jan 2019	Mar2021 Jul2022	Mar2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA008551	KCP45152	KCP30023
Sample Date		Client Info		19 Mar 2024	11 Jul 2022	12 Mar 2021
Machine Age	hrs	Client Info		45241	34221	27978
Oil Age	hrs	Client Info		0	34221	27978
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	8	12	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	35
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	0	0	47
Calcium	ppm	ASTM D5185m	0	0	0	<1
Phosphorus	ppm	ASTM D5185m	0	0	8	5
Zinc	ppm	ASTM D5185m	0	0	0	9
Sulfur	ppm	ASTM D5185m	23500	20870	16723	19482
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		0	0	23
Potassium	ppm	ASTM D5185m	>20	0	<1	4
Water	%	ASTM D6304	>0.05	0.002	0.011	0.020
ppm Water	ppm	ASTM D6304	>500	24	114.0	200.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		23438	78	5265
Particles >6µm		ASTM D7647	>1300	<b>^</b> 7203	22	<b>1600</b>
Particles >14μm		ASTM D7647	>80	<b>△</b> 688	6	<b>147</b>
Particles >21µm		ASTM D7647	>20	<u> </u>	2	<b>4</b> 7
Particles >38μm		ASTM D7647	>4	<u>4</u>	1	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/20/17</u>	13/12/10	18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	10T11 D0015	4.0		0 = 0	0.100

0.50

0.428



## **OIL ANALYSIS REPORT**

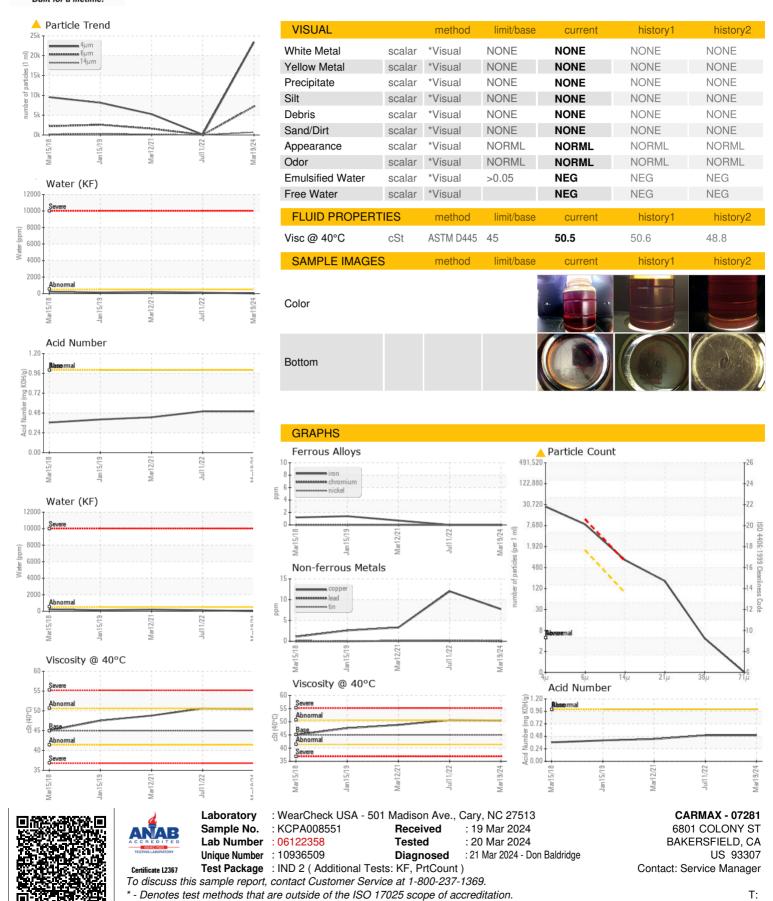

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: