




# OIL ANALYSIS REPORT

Sample Rating Trend

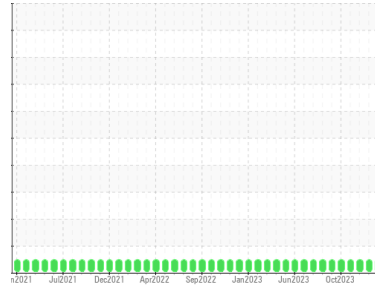

**NORMAL**



Area  
**Martinsville**  
 Machine Id  
**[Martinsville] Oil - Port Reduction Gear**  
 Component  
**Port Reduction Gear**  
 Fluid  
**MOBIL DELVAC 1640 (28 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0845813</b>	WC0735527	WC0845969
Sample Date	Client Info		<b>15 Feb 2024</b>	21 Jan 2024	23 Dec 2023
Machine Age	hrs	Client Info	<b>23154</b>	22613	22019
Oil Age	hrs	Client Info	<b>9034</b>	10311	7897
Oil Changed	Client Info		<b>Filtered</b>	Not Changd	Filtered
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>10</b>	10	9
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>0</b>	<1	1
Lead	ppm	ASTM D5185m >100	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >50	<b>17</b>	15	14
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>11</b>	11	13
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>34</b>	36	35
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>522</b>	521	527
Calcium	ppm	ASTM D5185m	<b>1354</b>	1338	1331
Phosphorus	ppm	ASTM D5185m	<b>802</b>	836	835
Zinc	ppm	ASTM D5185m	<b>862</b>	961	949
Sulfur	ppm	ASTM D5185m	<b>3236</b>	3101	2962

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>1</b>	3	2
Sodium	ppm	ASTM D5185m	<b>2</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	0
Water	%	ASTM D6304 >0.1	<b>0.028</b>	0.059	0.020
ppm Water	ppm	ASTM D6304 >1000	<b>281</b>	592	209

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.82</b>	0.84	0.90




# OIL ANALYSIS REPORT

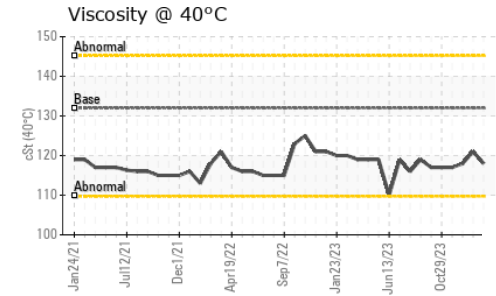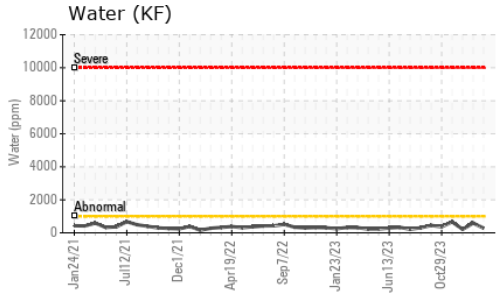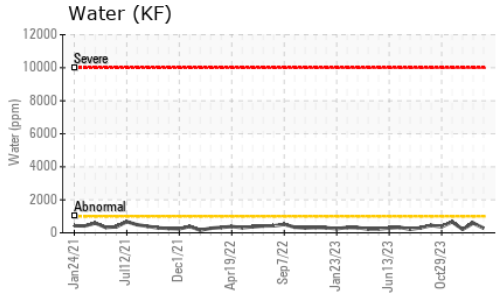





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 132	<b>118</b>	121	118

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

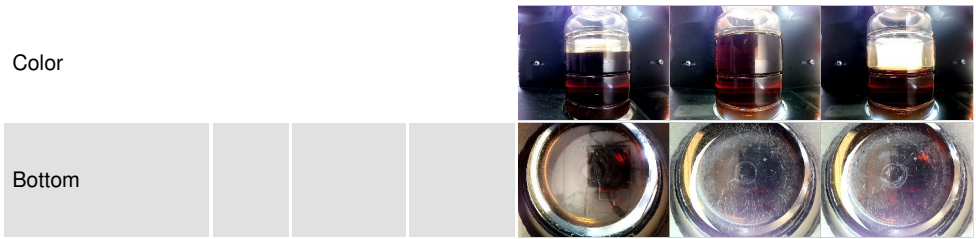

## GRAPHS

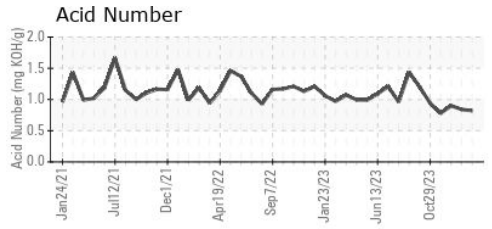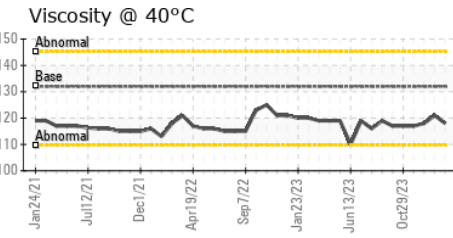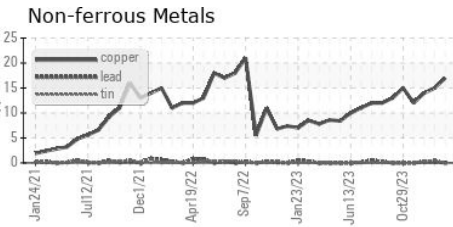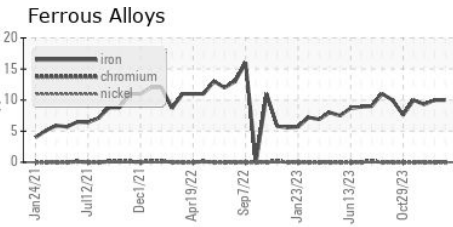

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0845813 **Received** : 19 Mar 2024  
**Lab Number** : **06122460** **Tested** : 20 Mar 2024  
**Unique Number** : 10936611 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)