




OIL ANALYSIS REPORT



Area
Canton
Machine Id
[Canton] Oil - Starboard Main Engine
Component
Starboard Main Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (150 GAL)

Sample Rating Trend

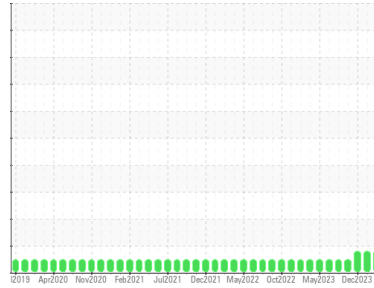

WEAR



DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The lead level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0805432	WC0805428	WC0805395
Sample Date	Client Info		27 Feb 2024	01 Feb 2024	14 Dec 2023
Machine Age	hrs	Client Info	0	15367	14362
Oil Age	hrs	Client Info	0	15367	14362
Oil Changed	Client Info		N/A	Oil Added	Oil Added
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	55	51	47
Chromium	ppm	ASTM D5185m >8	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m >3	0	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	1	2	3
Lead	ppm	ASTM D5185m >18	▲ 19	▲ 18	▲ 18
Copper	ppm	ASTM D5185m >80	6	6	6
Tin	ppm	ASTM D5185m >14	0	<1	2
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	86	97	91
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	102	108	106
Manganese	ppm	ASTM D5185m	0	<1	1
Magnesium	ppm	ASTM D5185m 450	1049	1028	1059
Calcium	ppm	ASTM D5185m 3000	1512	1482	1466
Phosphorus	ppm	ASTM D5185m 1150	807	913	954
Zinc	ppm	ASTM D5185m 1350	1061	1133	1175
Sulfur	ppm	ASTM D5185m 4250	3162	2829	2798

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	8	5	5
Sodium	ppm	ASTM D5185m >158	1	3	3
Potassium	ppm	ASTM D5185m >20	0	0	2
Water	%	ASTM D6304 >0.1	NEG	NEG	NEG

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.6	0.5	0.5
Nitration	Abs/cm	*ASTM D7624 >20	13.7	13.0	12.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	28.7	28.0	27.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	32.8	30.4	29.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	6.56	7.12	7.46







OIL ANALYSIS REPORT

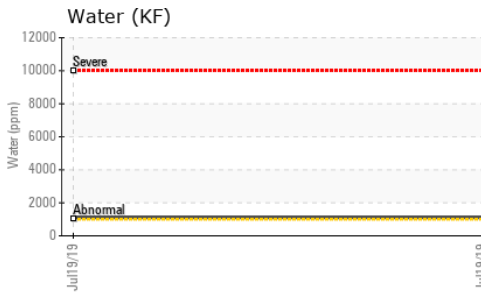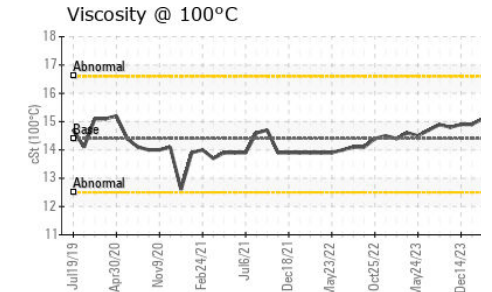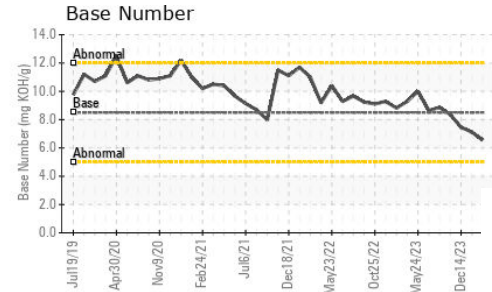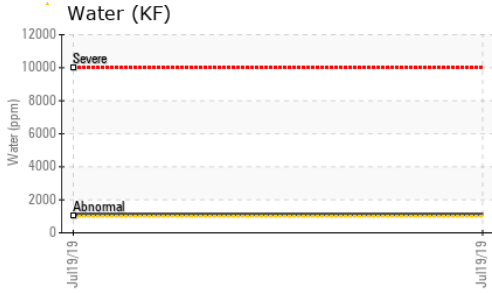

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	15.1	14.9

GRAPHS

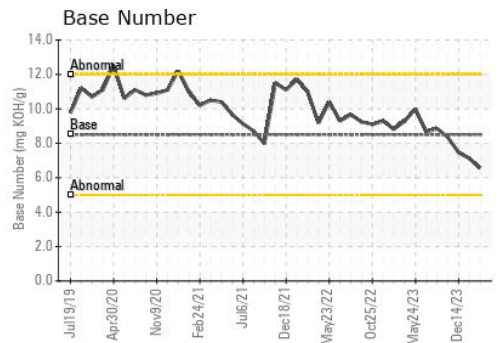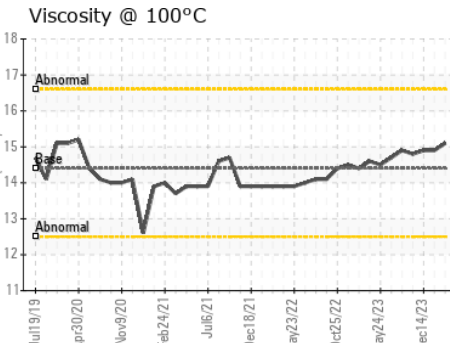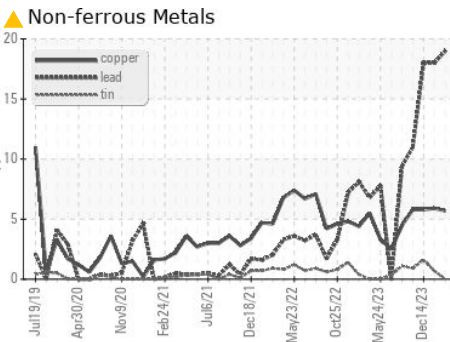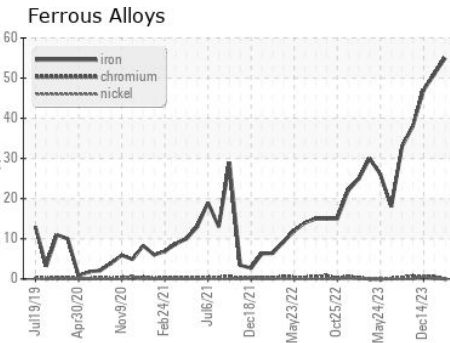

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0805432
 Lab Number : 06122599
 Unique Number : 10936750
 Test Package : IND 2 (Additional Tests: KF)

MARATHON PETROLEUM CO.
 101 12TH ST
 CATLETTSBURG, KY
 US 41169
 Contact: M/V CANTON
 mvcanton@marathonpetroleum.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: