




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

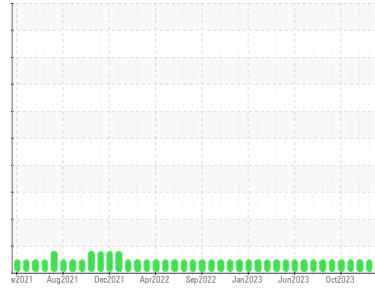

Area  
**Martinsville**  
 Machine Id  
**[Martinsville] Oil - Port Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (150 GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0735154</b>	WC0735531	WC0845815
Sample Date	Client Info			<b>15 Feb 2024</b>	21 Jan 2024	23 Dec 2023
Machine Age	hrs	Client Info		<b>20454</b>	19913	19319
Oil Age	hrs	Client Info		<b>4114</b>	3602	2977
Oil Changed	Client Info			<b>Filtered</b>	Not Changd	Filtered
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>17</b>	17	12
Chromium	ppm	ASTM D5185m	>8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>15	<b>&lt;1</b>	3	2
Lead	ppm	ASTM D5185m	>18	<b>&lt;1</b>	4	2
Copper	ppm	ASTM D5185m	>80	<b>11</b>	16	14
Tin	ppm	ASTM D5185m	>14	<b>0</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>53</b>	70	70
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>72</b>	79	76
Manganese	ppm	ASTM D5185m		<b>0</b>	2	<1
Magnesium	ppm	ASTM D5185m	450	<b>1349</b>	1240	1217
Calcium	ppm	ASTM D5185m	3000	<b>1289</b>	1223	1231
Phosphorus	ppm	ASTM D5185m	1150	<b>866</b>	902	900
Zinc	ppm	ASTM D5185m	1350	<b>1139</b>	1136	1120
Sulfur	ppm	ASTM D5185m	4250	<b>3342</b>	2781	2807




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	4	3
Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	<1
Water	%	ASTM D6304	>0.1	<b>NEG</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.2</b>	9.8	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.7</b>	22.8	22.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	19.6	19.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.03</b>	9.70	9.46







# OIL ANALYSIS REPORT

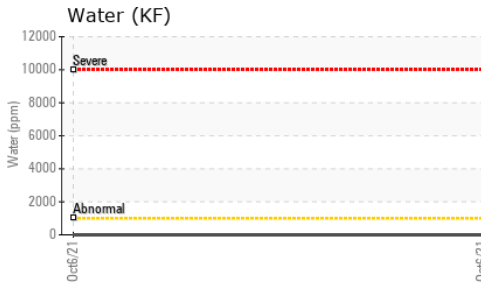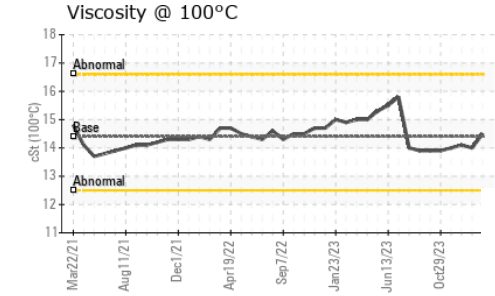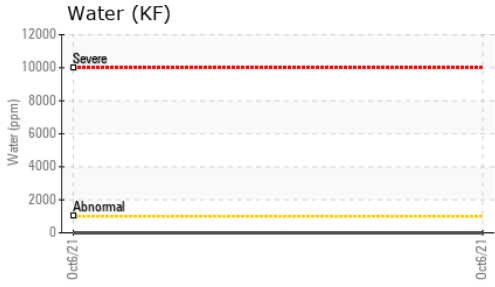

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.5</b>	14.0	14.1

## GRAPHS

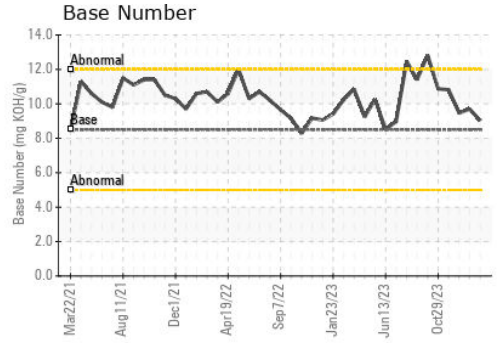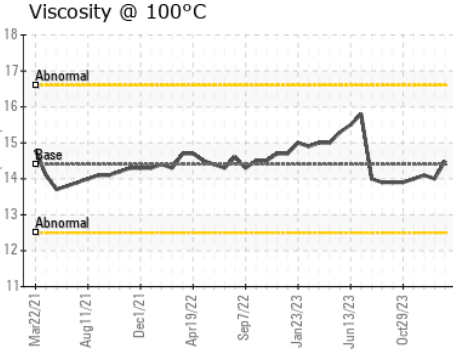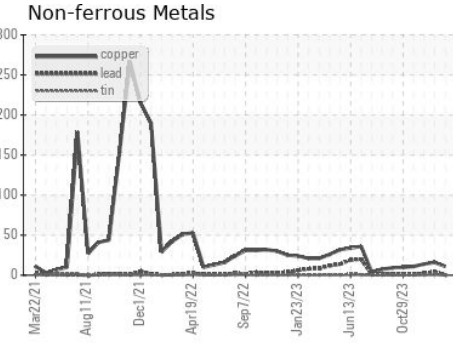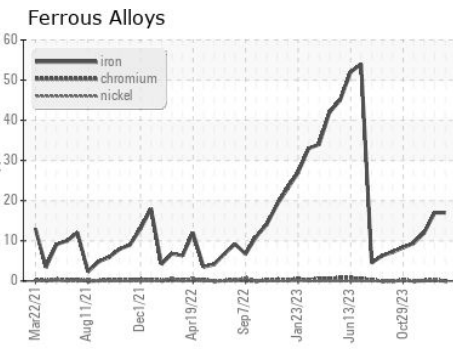

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0735154      **Received** : 19 Mar 2024  
**Lab Number** : 06122602      **Tested** : 21 Mar 2024  
**Unique Number** : 10936753      **Diagnosed** : 21 Mar 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)