




# OIL ANALYSIS REPORT

Sample Rating Trend

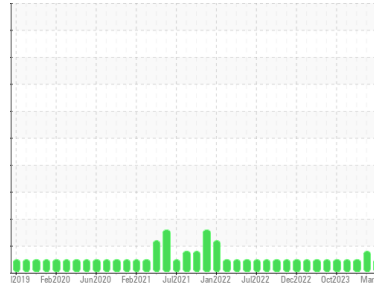

**NORMAL**



Area  
**Garyville**  
 Machine Id  
**[Garyville] Oil - Port Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**SHELL ROTELLA T 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0859888</b>	WC0859889	WC0805193
Sample Date	Client Info	<b>14 Mar 2024</b>	13 Feb 2024	18 Dec 2023
Machine Age	hrs	<b>12700</b>	4665	4665
Oil Age	hrs	<b>2750</b>	4210	4210
Oil Changed	Client Info	<b>Filtered</b>	Filtered	Filtered
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>26</b>	30	18
Chromium	ppm ASTM D5185m >8	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >3	<b>3</b>	5	4
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>0</b>	1	<1
Lead	ppm ASTM D5185m >18	<b>15</b>	▲ 20	10
Copper	ppm ASTM D5185m >80	<b>6</b>	9	9
Tin	ppm ASTM D5185m >14	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 316	<b>96</b>	88	68
Barium	ppm ASTM D5185m 0.0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 1.2	<b>33</b>	34	25
Manganese	ppm ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm ASTM D5185m 24	<b>606</b>	653	537
Calcium	ppm ASTM D5185m 2292	<b>1702</b>	1904	1741
Phosphorus	ppm ASTM D5185m 1064	<b>786</b>	992	750
Zinc	ppm ASTM D5185m 1160	<b>1005</b>	1181	938
Sulfur	ppm ASTM D5185m 4996	<b>3498</b>	3531	2772

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>3</b>	4	3
Sodium	ppm ASTM D5185m >75	<b>&lt;1</b>	2	1
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	0
Water	% ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.6</b>	0.6	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>9.4</b>	9.7	9.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.2</b>	22.2	21.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.2</b>	18.1	16.9
Base Number (BN)	mg KOH/g ASTM D2896 10.1	<b>7.83</b>	7.98	9.60







# OIL ANALYSIS REPORT

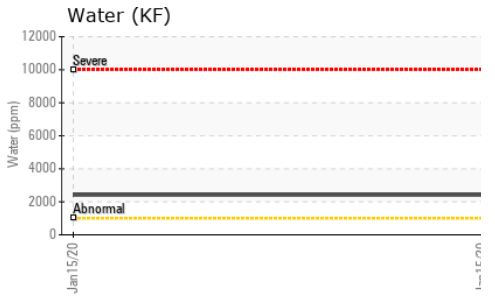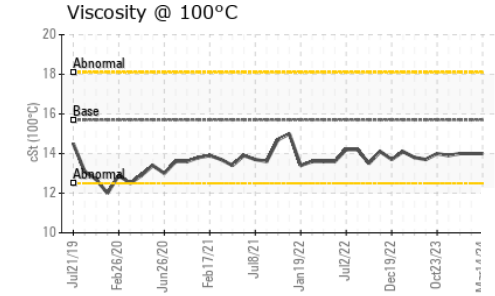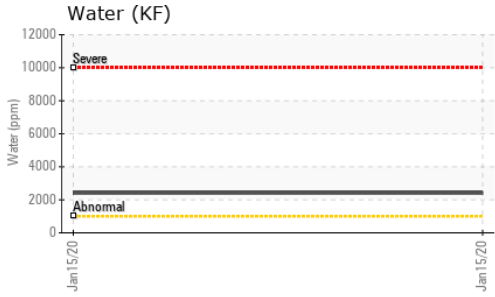

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	<b>14.0</b>	14.0	14.0

### GRAPHS

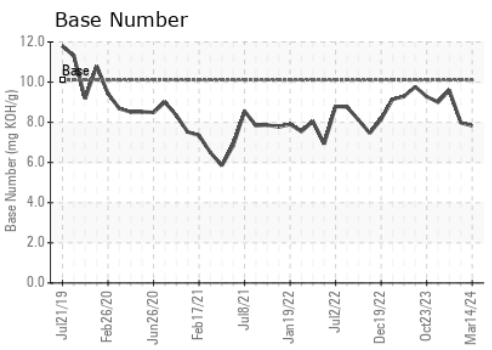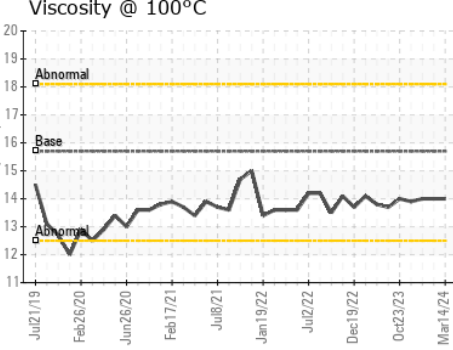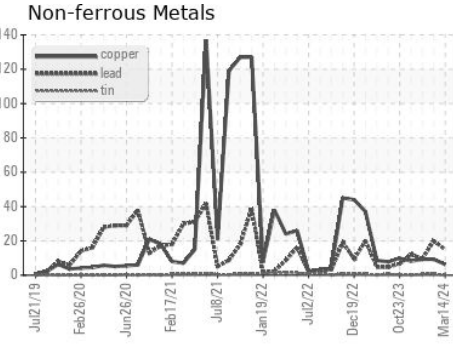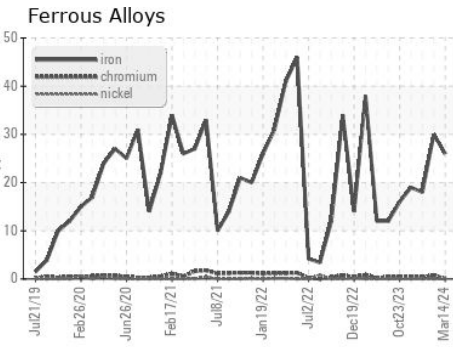

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0859888 **Received** : 19 Mar 2024  
**Lab Number** : **06122603** **Tested** : 21 Mar 2024  
**Unique Number** : 10936754 **Diagnosed** : 21 Mar 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: SHAWN MCCLASKEY  
 stmccclaskey@marathonpetroleum.com  
 T: (606)739-2416  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)