




# OIL ANALYSIS REPORT

Sample Rating Trend

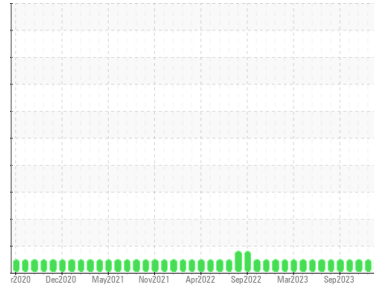

**NORMAL**



Area  
**Kenova**  
 Machine Id  
**[Kenova] Oil - Starboard Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**MOBIL 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0805213</b>	WC0805208	WC0805222
Sample Date	Client Info	<b>11 Mar 2024</b>	16 Jan 2024	20 Nov 2023
Machine Age	hrs Client Info	<b>40128</b>	39022	37876
Oil Age	hrs Client Info	<b>2919</b>	1812	668
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>15</b>	8	2
Chromium	ppm ASTM D5185m >8	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m >3	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >15	<b>1</b>	3	3
Lead	ppm ASTM D5185m >18	<b>2</b>	4	0
Copper	ppm ASTM D5185m >80	<b>27</b>	18	8
Tin	ppm ASTM D5185m >14	<b>0</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>111</b>	153	161
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>95</b>	95	88
Manganese	ppm ASTM D5185m	<b>0</b>	2	<1
Magnesium	ppm ASTM D5185m	<b>642</b>	606	593
Calcium	ppm ASTM D5185m	<b>1611</b>	1432	1430
Phosphorus	ppm ASTM D5185m	<b>621</b>	678	684
Zinc	ppm ASTM D5185m	<b>796</b>	799	814
Sulfur	ppm ASTM D5185m	<b>2935</b>	2617	2734

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>3</b>	5	3
Sodium	ppm ASTM D5185m >118	<b>&lt;1</b>	4	<1
Potassium	ppm ASTM D5185m >20	<b>0</b>	4	<1
Water	% ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.3</b>	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>11.1</b>	9.3	7.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.4</b>	22.0	21.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>23.3</b>	19.4	16.3
Base Number (BN)	mg KOH/g ASTM D2896	<b>7.05</b>	8.29	9.81







# OIL ANALYSIS REPORT

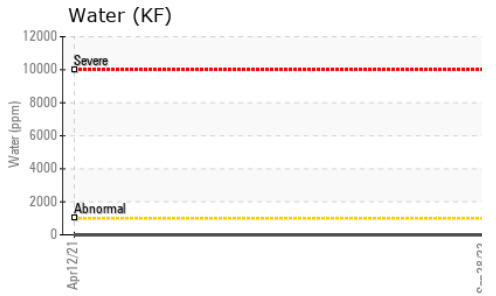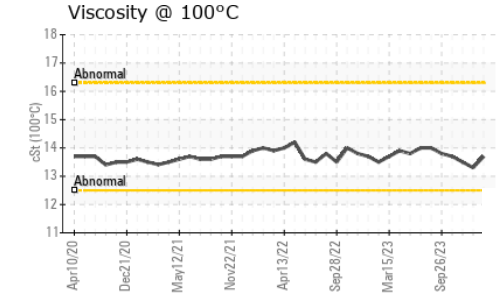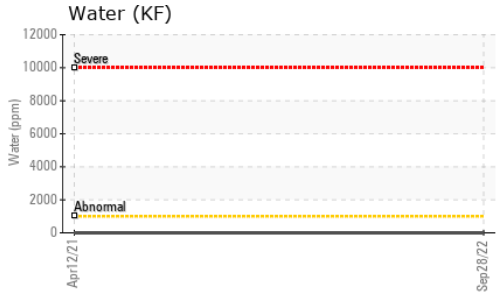

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.7</b>	13.3	13.5

## GRAPHS

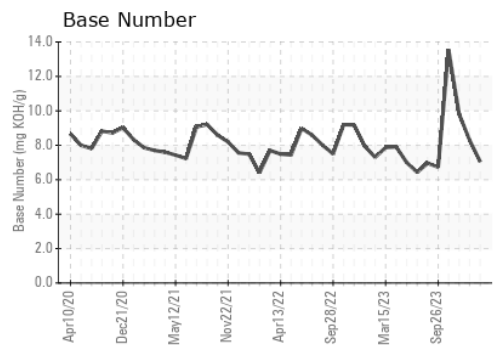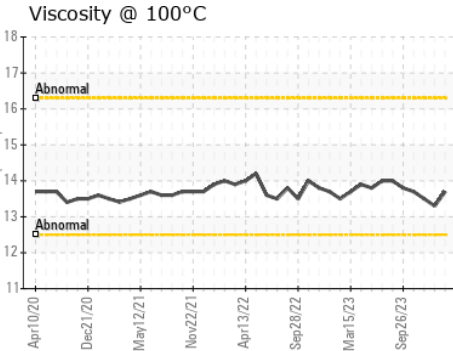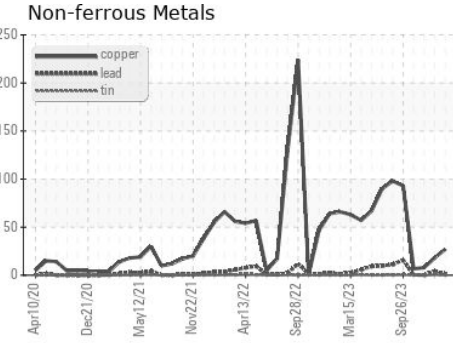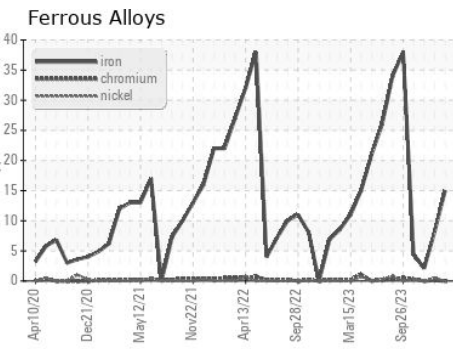

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0805213  
**Lab Number** : **06122621**  
**Unique Number** : 10936772  
**Test Package** : IND 2 ( Additional Tests: KF )  
**Received** : 19 Mar 2024  
**Tested** : 21 Mar 2024  
**Diagnosed** : 21 Mar 2024 - Jonathan Hester

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)