

## **OIL ANALYSIS REPORT**

# THUNDER SPIRIT [200005313] 06WEA84032

Component Wind Turbine Gearbox Elui

CASTROL OPTIGEAR SYNTHETIC X 320 (--- QTS)

## Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

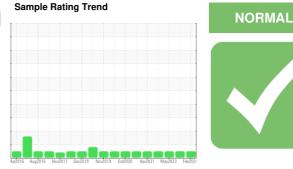



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX014500	NX014785	NX013613
Sample Date		Client Info		14 Feb 2024	31 Oct 2023	24 May 2023
Machine Age	hrs	Client Info		51413	49309	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>80	12	14	15
Iron	ppm	ASTM D5185m	>150	17	12	4
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	1	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		8	9	13
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	1150	36	21	33
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		0	2	<1
Calcium	ppm	ASTM D5185m	2000	67	65	68
Phosphorus	ppm	ASTM D5185m	400	209	223	224
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	1850	5051	4944	6152
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1	1	<1
Sodium	ppm	ASTM D5185m	>20	0	<1	<1
Potassium	ppm	ASTM D5185m	>20	2	6	2
Water	%	ASTM D6304	>0.05	0.001	0.006	0.004
ppm Water	ppm	ASTM D6304	>500	8	62	40.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2132	1898	838
Particles >6µm		ASTM D7647		530	123	182
Particles >14µm		ASTM D7647	>320	58	13	14
Particles >21µm		ASTM D7647	>80	17	4	4
Particles >38µm		ASTM D7647	>20	1	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	18/16/13	18/14/11	17/15/11



Ok

360

350

340

300 290 Ab

280

200

150

쉽100

50

Mar29/1


PQ

Mar29/16

# **OIL ANALYSIS REPORT**

Water (KF)	FLUID DEC
800 Severe	Acid Number
600 Abgemal	VISUAL
Mater (ppm) Mar29/16 Aug 13/16 Nov3/17 Nov3/17 May24/23 May24/23 Feb 14/24	White Metal Yellow Metal Precipitate Silt Debris
PQ 200 150	Sand/Dirt Appearance Odor Emulsified Wa
문 100 - Abnormal	Free Water
50	FLUID PRO
	Visc @ 40°C
Mar29/16 Aug13/16 Nov3/17 Dec19/18 Oct8/20 Apr26/21 May24/23 Feb14/24	SAMPLE IN
Particle Trend	Color
150k 14μm   septem 14μm   septem 50k	Bottom

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	0.30	0.31	0.34
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	332	327	323
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2

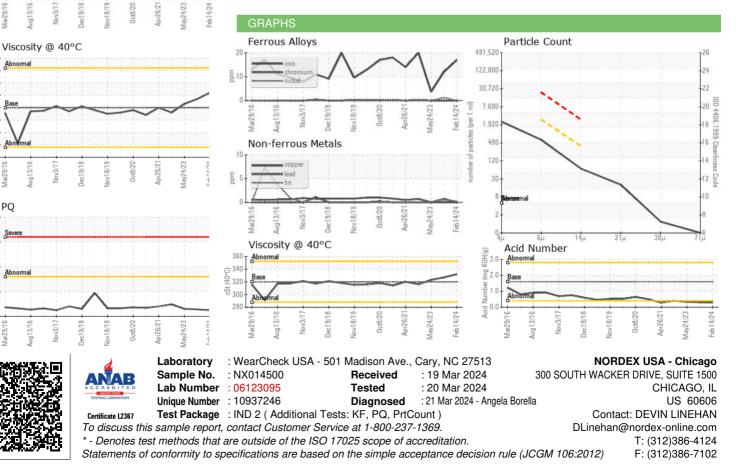

Contact/Location: DEVIN LINEHAN - NORDEX