




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

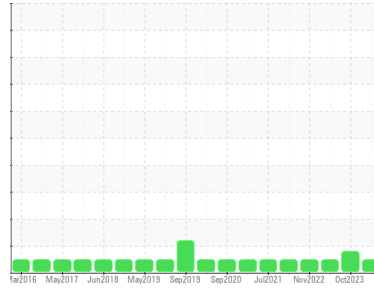

Area  
**THUNDER SPIRIT [200005313]**  
 Machine Id  
**23WEA84007 (S/N EWP00683)**

Component  
**Wind Turbine Gearbox**  
 Fluid  
**CASTROL OPTIGEAR SYNTHETIC X 320 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>NX015558</b>	NX014808	NX013611
Sample Date	Client Info		<b>28 Feb 2024</b>	17 Oct 2023	26 May 2023
Machine Age	hrs	Client Info	<b>50129</b>	55768	53306
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	MARGINAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>80	<b>12</b>	12	10
Iron	ppm	ASTM D5185m	>150	<b>0</b>	1
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1
Titanium	ppm	ASTM D5185m	>10	<b>0</b>	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0
Aluminum	ppm	ASTM D5185m	>10	<b>6</b>	9
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	2
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>25</b>	0
Barium	ppm	ASTM D5185m		<b>0</b>	3
Molybdenum	ppm	ASTM D5185m	1150	<b>740</b>	685
Manganese	ppm	ASTM D5185m		<b>0</b>	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	2
Calcium	ppm	ASTM D5185m	2000	<b>1374</b>	1171
Phosphorus	ppm	ASTM D5185m	400	<b>314</b>	315
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0
Sulfur	ppm	ASTM D5185m	1850	<b>1858</b>	1797

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>8</b>	8
Sodium	ppm	ASTM D5185m	>20	<b>3</b>	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2
Water	%	ASTM D6304	>0.05	<b>0.005</b>	0.001
ppm Water	ppm	ASTM D6304	>500	<b>50</b>	12.0

## FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>1204</b>	784	677
Particles >6µm	ASTM D7647	>2500	<b>236</b>	159	188
Particles >14µm	ASTM D7647	>320	<b>10</b>	9	27
Particles >21µm	ASTM D7647	>80	<b>2</b>	2	8
Particles >38µm	ASTM D7647	>20	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/15	<b>17/15/10</b>	17/14/10	17/15/12

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.6	<b>0.64</b>	0.45




# OIL ANALYSIS REPORT

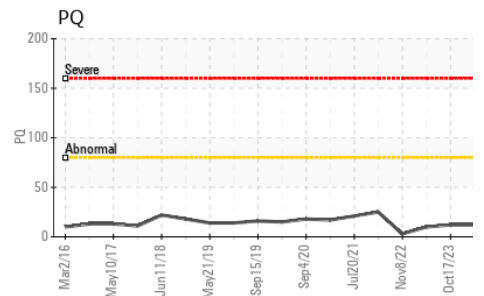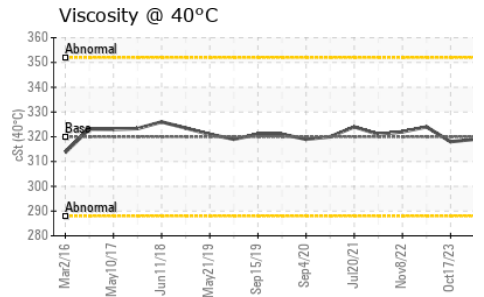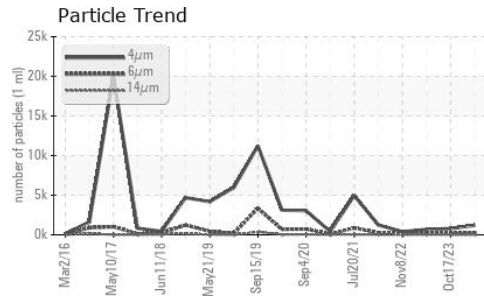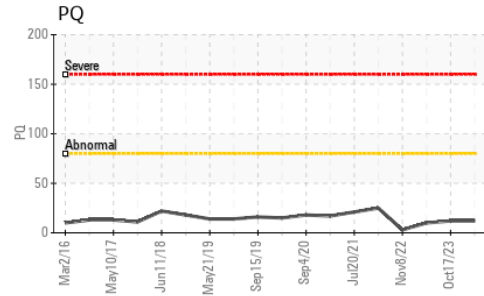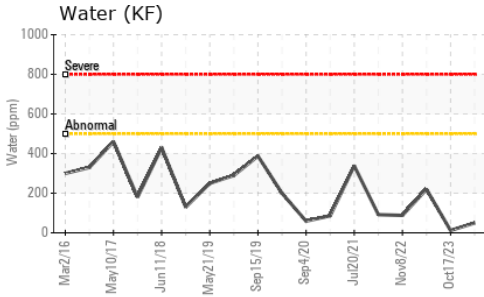






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 320	319	318	324

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

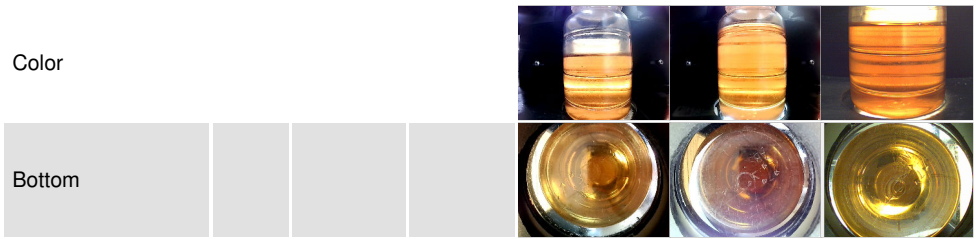

## GRAPHS

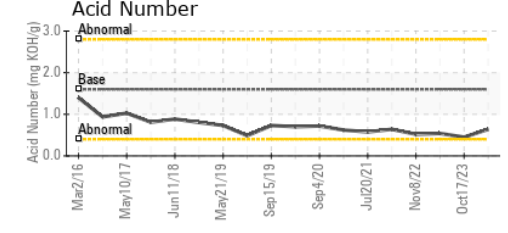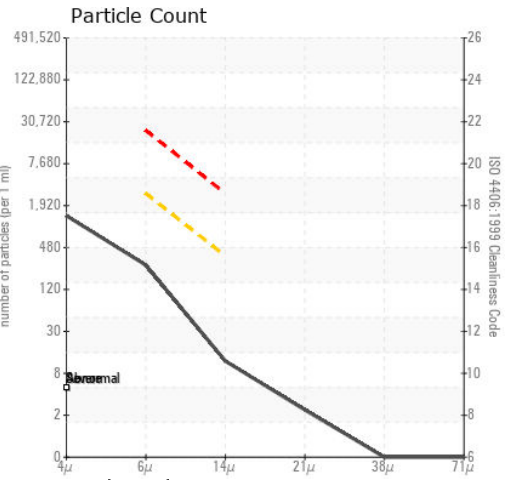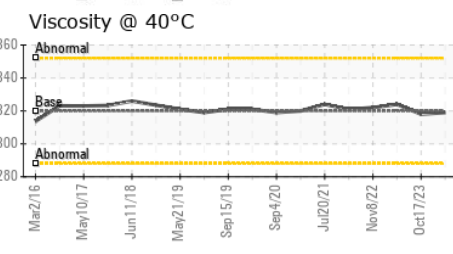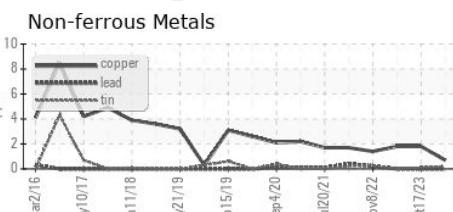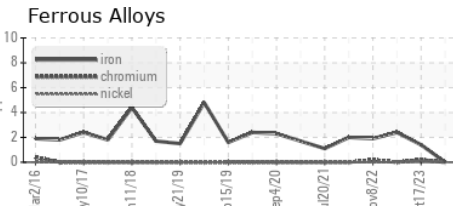

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : NX015558 **Received** : 19 Mar 2024  
**Lab Number** : 06123100 **Tested** : 20 Mar 2024  
**Unique Number** : 10937251 **Diagnosed** : 21 Mar 2024 - Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KF, PQ, PrtCount )

**NORDEX USA - Chicago**  
 300 SOUTH WACKER DRIVE, SUITE 1500  
 CHICAGO, IL  
 US 60606  
 Contact: DEVIN LINEHAN  
 DLinehan@nordex-online.com  
 T: (312)386-4124  
 F: (312)386-7102

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)