




OIL ANALYSIS REPORT

Sample Rating Trend

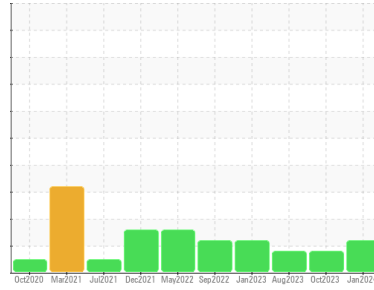

Area
DICK LAVY
Machine Id
DICK LAVY 4818
Component
Transmission
Fluid
{not provided} (--- GAL)

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is a high amount of silt (particulates < 14 microns in size) present in the oil.
- Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900859	WC0853946	WC0853947
Sample Date	Client Info		29 Jan 2024	02 Oct 2023	15 Aug 2023
Machine Age	mls	Client Info	405337	363954	345742
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ATTENTION	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	33	29	28
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>50	5	3	3
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>200	16	22	27
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		1	1	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	7	1
Manganese	ppm	ASTM D5185m		6	5	5
Magnesium	ppm	ASTM D5185m		0	2	2
Calcium	ppm	ASTM D5185m		627	562	572
Phosphorus	ppm	ASTM D5185m		527	488	482
Zinc	ppm	ASTM D5185m		36	40	39
Sulfur	ppm	ASTM D5185m		3663	2975	2878

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	45	42	42
Sodium	ppm	ASTM D5185m		0	2	2
Potassium	ppm	ASTM D5185m	>20	0	4	3
Water	%	ASTM D6304	>0.1	0.026	0.023	0.026
ppm Water	ppm	ASTM D6304	>1000	268	233.6	260.7

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 58128	● 15945	● 14043
Particles >6µm	ASTM D7647	>2500	▲ 5590	● 1188	● 1605
Particles >14µm	ASTM D7647	>320	100	● 12	● 58
Particles >21µm	ASTM D7647	>80	18	● 1	● 15
Particles >38µm	ASTM D7647	>20	1	● 0	● 1
Particles >71µm	ASTM D7647	>4	0	● 0	● 0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 23/20/14	● 21/17/11	● 21/18/13


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.68	0.43	0.41




OIL ANALYSIS REPORT


Particle Trend

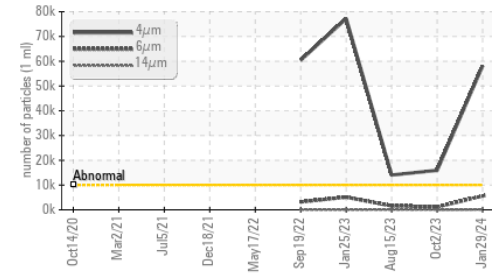


Water (KF)

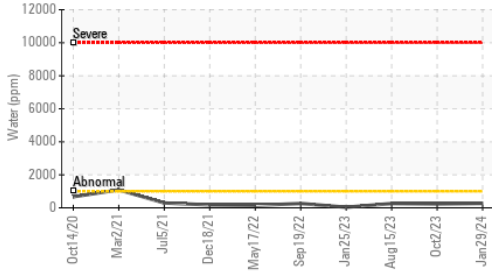


Viscosity @ 100°C

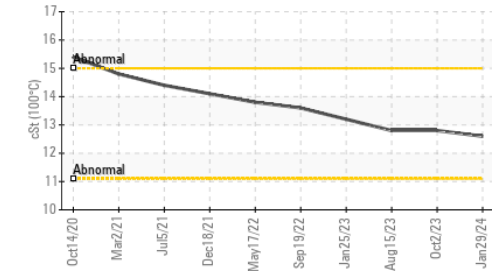

Water (KF)

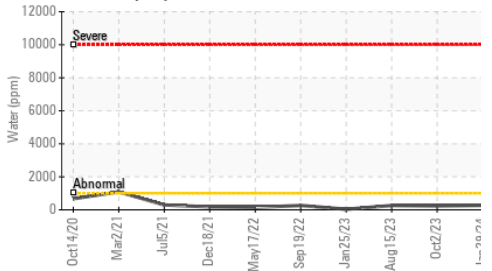


Viscosity @ 100°C

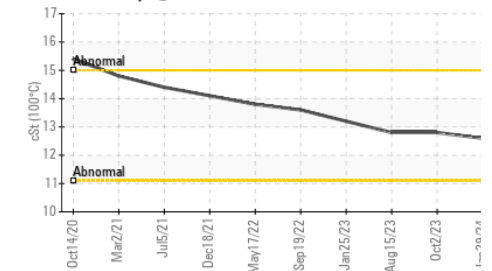

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	80.7	81.1	81.0
Visc @ 100°C	cSt	ASTM D445	12.6	12.8	12.8
Viscosity Index (VI)	Scale	ASTM D2270	154	157	157

SAMPLE IMAGES

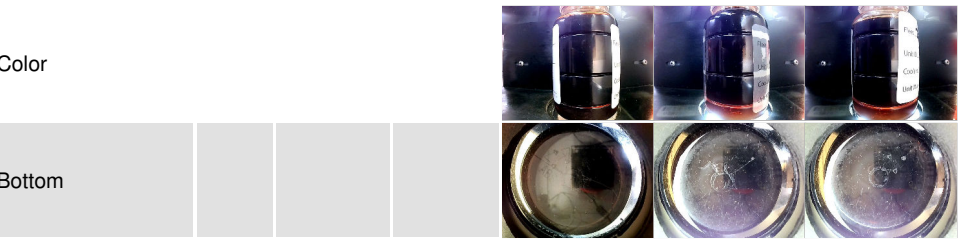


GRAPHS


Ferrous Alloys

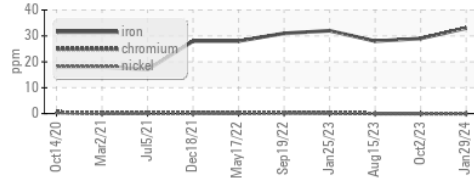


Non-ferrous Metals

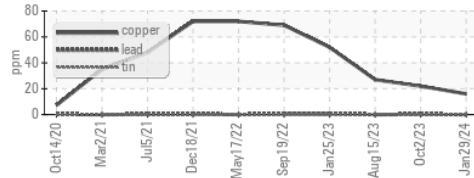


Viscosity @ 40°C

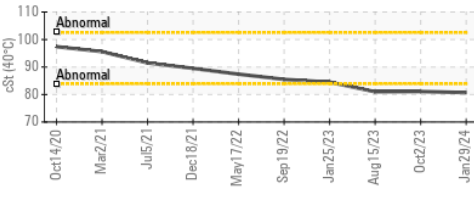

Particle Count

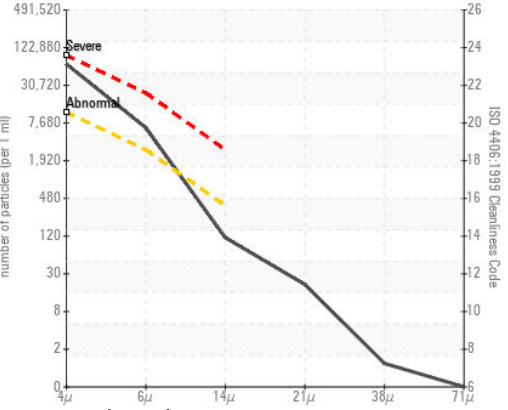

Acid Number

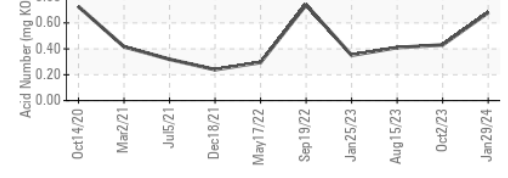

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900859 **Received** : 19 Mar 2024
Lab Number : 06123126 **Tested** : 20 Mar 2024
Unique Number : 10937277 **Diagnosed** : 22 Mar 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)