




# OIL ANALYSIS REPORT

Sample Rating Trend

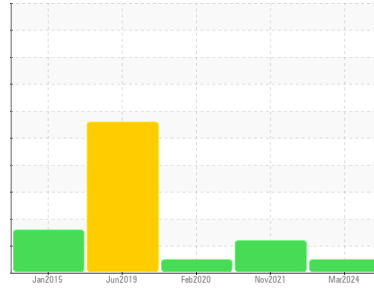

**NORMAL**



Machine Id  
**KAESER AIRCENTER SX5 4909432 (S/N 1302)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA015391</b>	KCP39569	KCP20617
Sample Date	Client Info		<b>08 Mar 2024</b>	23 Nov 2021	26 Feb 2020
Machine Age	hrs	Client Info	<b>10852</b>	4041	2990
Oil Age	hrs	Client Info	<b>900</b>	2050	90
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>3</b>	<1	<1
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m >50	<b>5</b>	2	3
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185m 90	<b>10</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>3</b>	0	1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 90	<b>22</b>	19	9
Calcium	ppm	ASTM D5185m 2	<b>&lt;1</b>	0	0
Phosphorus	ppm	ASTM D5185m	<b>0</b>	5	2
Zinc	ppm	ASTM D5185m	<b>0</b>	46	64
Sulfur	ppm	ASTM D5185m	<b>20930</b>	16421	16849

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>4</b>	11	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	0
Water	%	ASTM D6304 >0.05	<b>0.007</b>	0.007	0.005
ppm Water	ppm	ASTM D6304 >500	<b>77</b>	74.3	54.8






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>118</b>	33642	3044
Particles >6µm	ASTM D7647 >1300		<b>21</b>	▲ 14442	1094
Particles >14µm	ASTM D7647 >80		<b>3</b>	▲ 335	68
Particles >21µm	ASTM D7647 >20		<b>1</b>	▲ 48	17
Particles >38µm	ASTM D7647 >4		<b>0</b>	6	2
Particles >71µm	ASTM D7647 >3		<b>0</b>	0	1
Oil Cleanliness	ISO 4406 (c) >--/17/13		<b>14/12/9</b>	▲ 21/16	17/13

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.35</b>	0.17	0.162


# OIL ANALYSIS REPORT

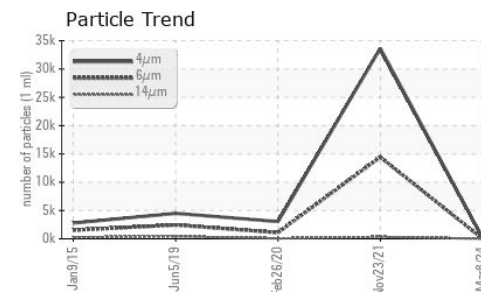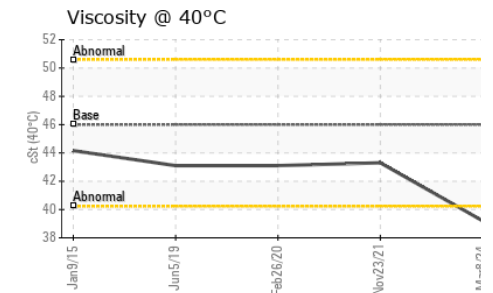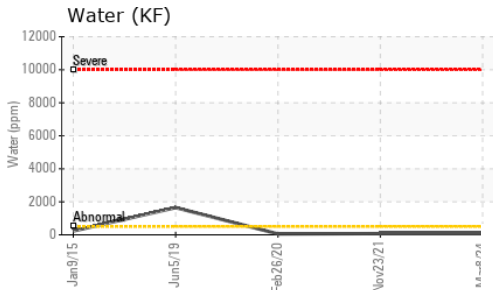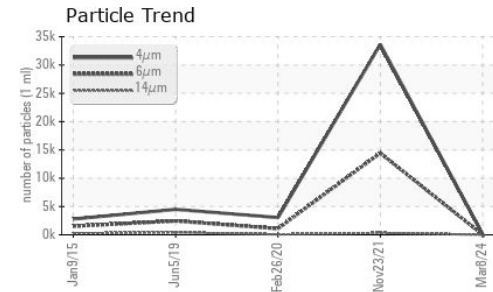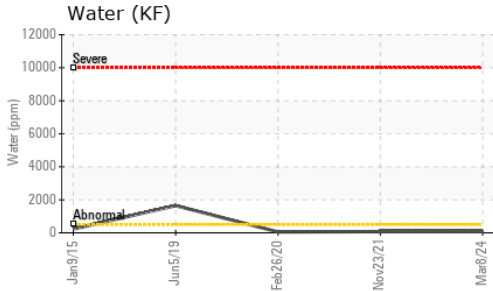






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	39.2	43.3	43.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

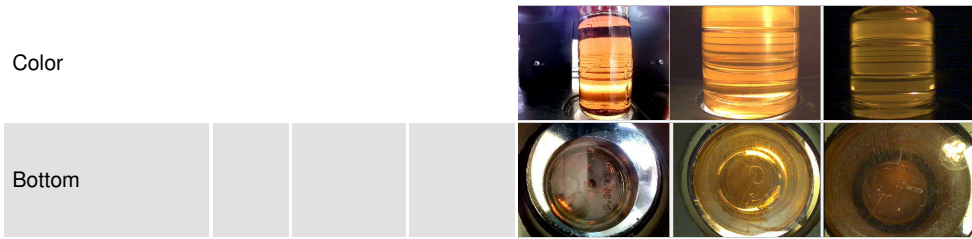

## GRAPHS

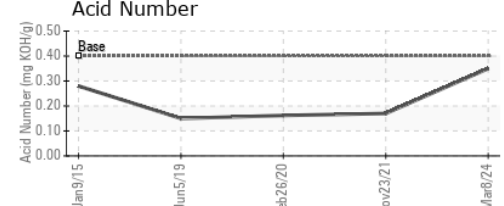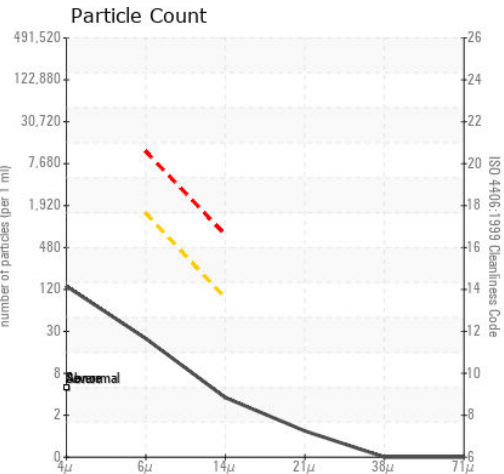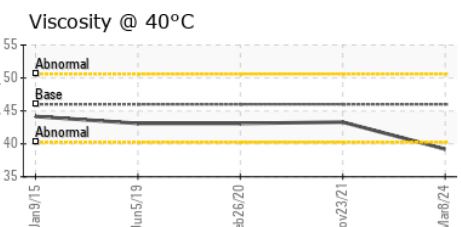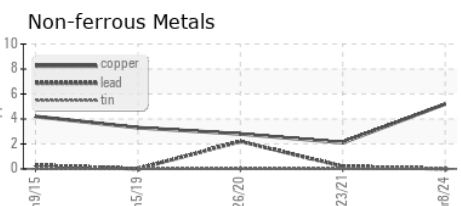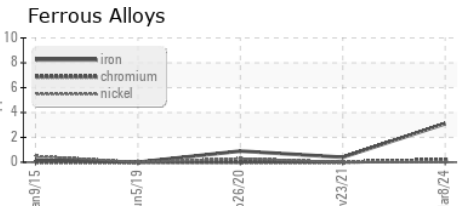

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA015391 **Received** : 19 Mar 2024  
**Lab Number** : 06123190 **Tested** : 20 Mar 2024  
**Unique Number** : 10937341 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**HOBBY LOBBY**  
 7707 SW 44TH ST  
 OKLAHOMA CITY, OK  
 US 73179  
 Contact: JEFF LEWIS  
 JEFF.LEWIS@HOBBYLOBBY.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)