


OIL ANALYSIS REPORT

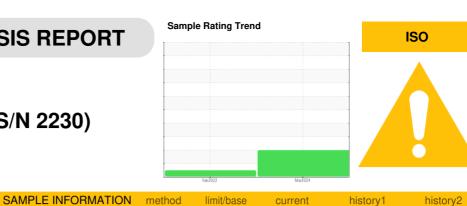

KAESER BSD 50 7278592 (S/N 2230) Component

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM		method	limit/base	current	history i	nistory2
Sample Number		Client Info		KCPA013288	KCP40979	
Sample Date		Client Info		05 Mar 2024	24 Feb 2022	
Machine Age	hrs	Client Info		18168	4321	
Oil Age	hrs	Client Info		3657	4321	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	3	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	<1	
Aluminum	ppm	ASTM D5185m	>10	3	6	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		1	2	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		3	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m		2	0	
Calcium	ppm	ASTM D5185m		2	0	
Phosphorus	ppm	ASTM D5185m	500	32	115	
Zinc	ppm	ASTM D5185m		0	96	
Sulfur	ppm	ASTM D5185m		947	3164	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	
Sodium	ppm	ASTM D5185m		2	0	
Potassium	ppm	ASTM D5185m	>20	0	1	
Water	%	ASTM D6304	>0.05	0.002	0.001	
ppm Water	ppm	ASTM D6304	>500	16	4.1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15104	1045	
Particles >6µm		ASTM D7647	>1300	<u> </u>	230	
Particles >14µm		ASTM D7647	>80	▲ 419	13	
Particles >21µm		ASTM D7647		▲ 144	2	
Particles >38µm		ASTM D7647	>4	▲ 7	0	
Particles >71µm		ASTM D7647 ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	o ▲ 21/19/16	15/11	
FLUID DEGRADA		method	limit/base			
				current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.64	0.57	



j 5 0.60

망 0.40

1000

600 Water (

4000

200

54

50

() 41 () 41 () 41 () 41

44

42 Abnorma

л

0.20 0.00

eh24/77

Water (KF)

Abnormal

Abnorma 52

Ba

Viscosity @ 40°C

-eh24/7

OIL ANALYSIS REPORT

scalar

scalar

scalar

method

*Visual

*Visual

*Visua

limit/base

NONE

NONE

NONE

current

NONE

NONE

NONE

history1

NONE

NONE

NONE


history2


VISUAL

White Metal

Yellow Metal

Precipitate

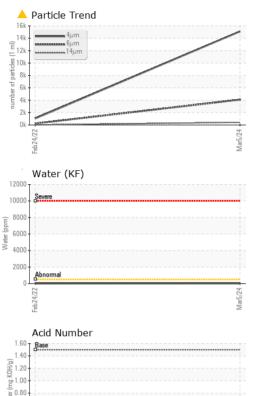

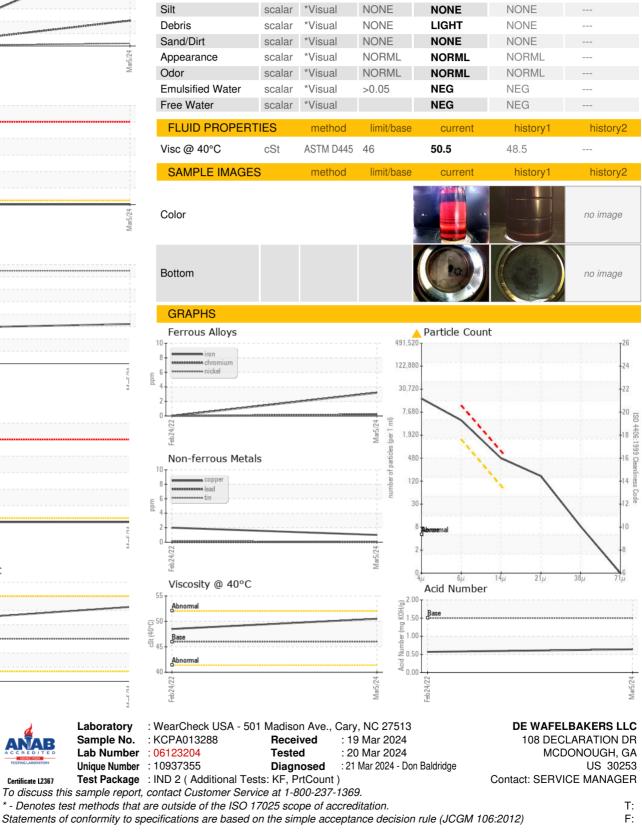

Certificate L2367