

## **OIL ANALYSIS REPORT**

# KAESER SK 20 6365425 (S/N 1160)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

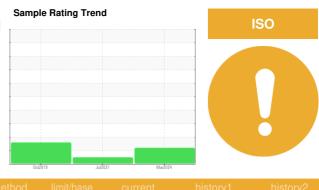

SAMPLE INFORM		method	limit/bass	ourropt	biotorut	biotory
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA014843	KCP42326	KCP21114
Sample Date		Client Info		11 Mar 2024	12 Jul 2021	28 Oct 2019
Machine Age	hrs	Client Info		7040	3917	2447
Oil Age	hrs	Client Info		1285	1483	2447
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	7	2	2
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	9	19
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m			0	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	1-1-		11 11 11			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	15	0
Barium	ppm	ASTM D5185m		7	0	0
Molybdenum	ppm	ASTM D5185m	0	3	0	<1
Manganese	ppm	ASTM D5185m	100	9	<1	<1
Magnesium	ppm	ASTM D5185m	100	50	37	34
Calcium	ppm	ASTM D5185m		<1	0	<1
Phosphorus	ppm	ASTM D5185m	0	0	5	3
Zinc	ppm	ASTM D5185m		41	29	25
Sulfur	ppm	ASTM D5185m	23500	22600	17222	9068
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		11	12	12
Potassium	ppm	ASTM D5185m		0	<1	<1
Water	%	ASTM D6304		0.013	0.012	0.022
ppm Water	ppm	ASTM D6304	>500	139	127.6	224.6
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		11061	3515	3192
Particles >6µm		ASTM D7647		<u> </u>	1132	1739
Particles >14µm		ASTM D7647	>80	<mark> </mark> 86	80	<b>2</b> 96
Particles >21µm		ASTM D7647	>20	17	23	<u> </u>
Particles >38µm		ASTM D7647	>4	0	2	<b>1</b> 5
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>e</b> 21/18/14	17/13	<b>1</b> 8/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KOH/g

mg KOH/g ASTM D8045 1.0

**0.48** 0.385


Report Id: MCNCOL [WUSCAR] 06123219 (Generated: 03/21/2024 17:34:28) Rev: 1


Contact/Location: Service Manager - MCNCOL

0.346




# **OIL ANALYSIS REPORT**

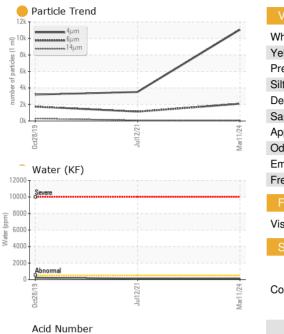

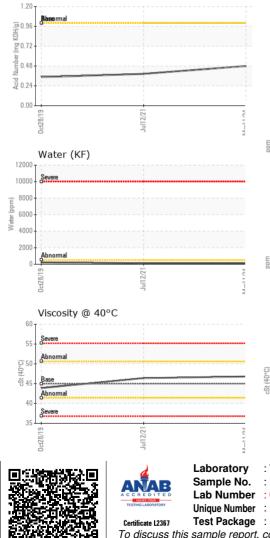

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES					
FLUID PROPERT Visc @ 40°C	IES cSt	method ASTM D445	limit/base 45	current 46.8	history1 46.4	history2 43.9
	cSt					
Visc @ 40°C	cSt	ASTM D445	45	46.8	46.4	43.9

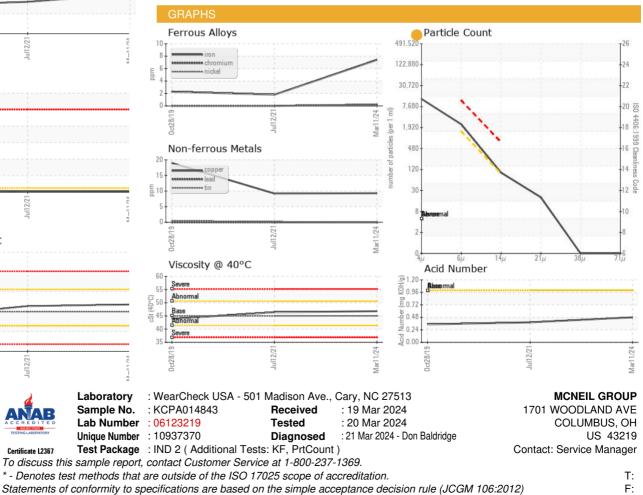

Contact/Location: Service Manager - MCNCOL