

# **OIL ANALYSIS REPORT**

Sample Number

hrs

Sample Date

Machine Age

#### Machine Ic KAESER SM 10 7770156 (S/N 1643) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear


All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

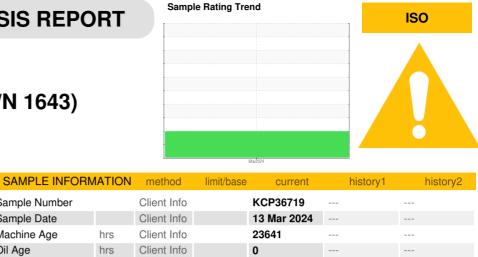

Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	29		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	51		
Calcium	ppm	ASTM D5185m	2	1		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		5		
Sulfur	ppm	ASTM D5185m		21157		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		25		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.05	0.003		
ppm Water	ppm	ASTM D6304	>500	30		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2

	method	in no buse	ourrent	Thotory	motoryz
Particles >4µm	ASTM D7647		10180		
Particles >6µm	ASTM D7647	>1300	<b>A</b> 3878		
Particles >14µm	ASTM D7647	>80	<u> </u>		
Particles >21µm	ASTM D7647	>20	<u> </u>		
Particles >38µm	ASTM D7647	>4	<u> </u>		
Particles >71µm	ASTM D7647	>3	0		
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>A</b> 21/19/16		
FLUID DEGRADATION	method	limit/base	current	history1	history2
		0.4			

Acid Number (AN)

mg KOH/g ASTM D8045 0.4



Built for a lifetime

12

.10 1

8

61

4

21

0

12000

1000

800 (maa)

600 Water 400

200

0.50

(B/HOX Ê0.3

E 0.20

Pio 0.1

0.00

1000

600 Water (

4000

200

52

5

48

47

40

38


Ø.


Mar13/24

/lar

Marl

particles (1



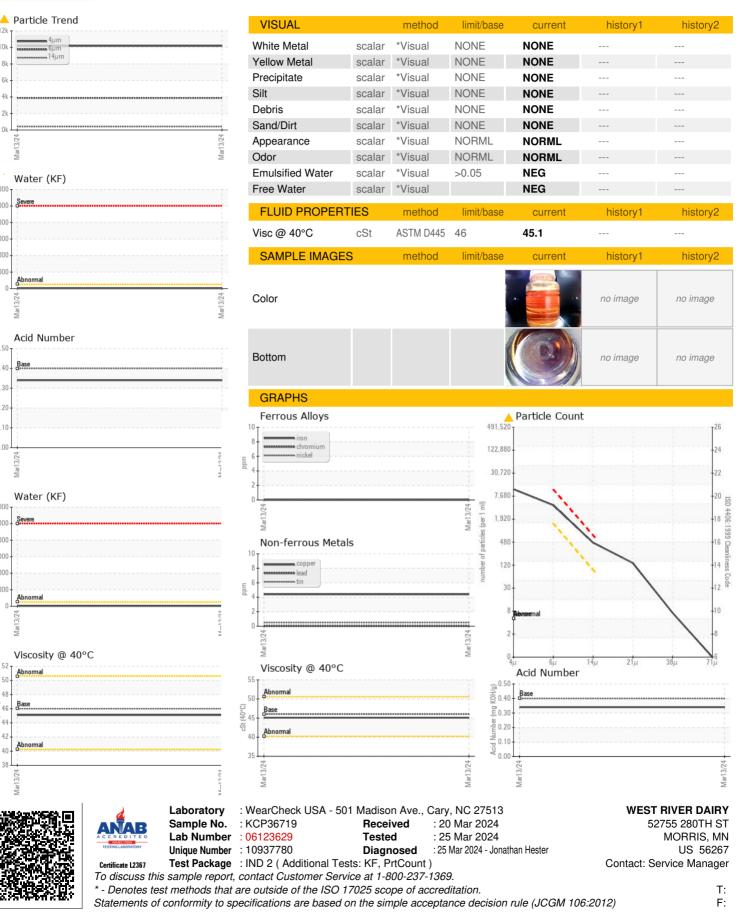

Contact/Location: Service Manager - WESMORMN