




OIL ANALYSIS REPORT

Sample Rating Trend

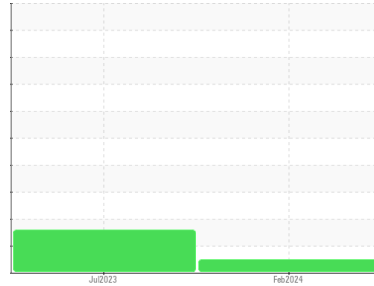

NORMAL



Machine Id
KAESER CSU126 8619518 (S/N 1015)

Component
Compressor

Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCP36694	KCPA004991	---
Sample Date	Client Info		08 Feb 2024	18 Jul 2023	---
Machine Age	hrs	Client Info	8370	5511	---
Oil Age	hrs	Client Info	8370	0	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			NORMAL	ATTENTION	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	21	24	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >3	<1	<1	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >10	0	0	---
Lead	ppm	ASTM D5185m >10	0	0	---
Copper	ppm	ASTM D5185m >50	5	4	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Vanadium	ppm	ASTM D5185m	0	<1	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m 90	72	100	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	1	1	---
Magnesium	ppm	ASTM D5185m 90	99	105	---
Calcium	ppm	ASTM D5185m 2	3	3	---
Phosphorus	ppm	ASTM D5185m	7	6	---
Zinc	ppm	ASTM D5185m	0	0	---
Sulfur	ppm	ASTM D5185m	17418	19261	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	---
Sodium	ppm	ASTM D5185m	24	21	---
Potassium	ppm	ASTM D5185m >20	7	8	---
Water	%	ASTM D6304 >0.05	0.025	0.025	---
ppm Water	ppm	ASTM D6304 >500	258	255.5	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1730	1990	---
Particles >6µm	ASTM D7647 >1300		650	724	---
Particles >14µm	ASTM D7647 >80		78	137	---
Particles >21µm	ASTM D7647 >20		20	66	---
Particles >38µm	ASTM D7647 >4		1	8	---
Particles >71µm	ASTM D7647 >3		0	1	---
Oil Cleanliness	ISO 4406 (c) >--/17/13		18/17/13	18/17/14	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	0.48	0.40	---


OIL ANALYSIS REPORT

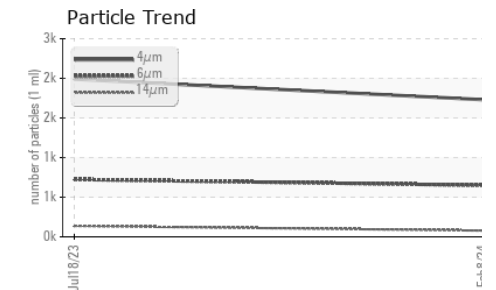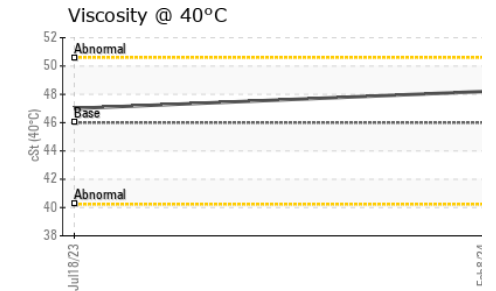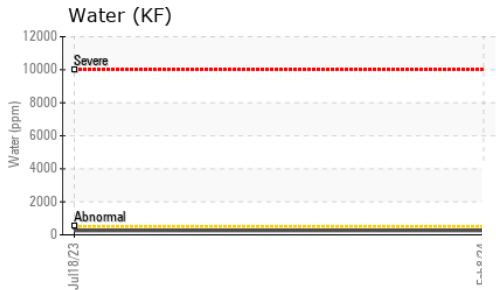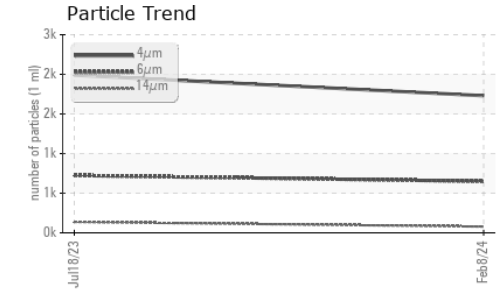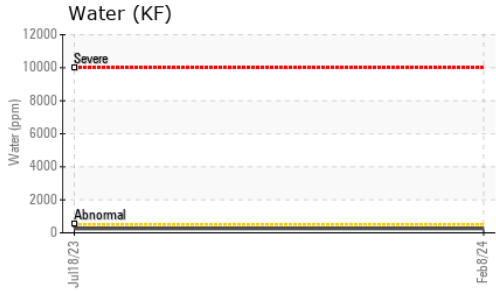





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	48.2	47.0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

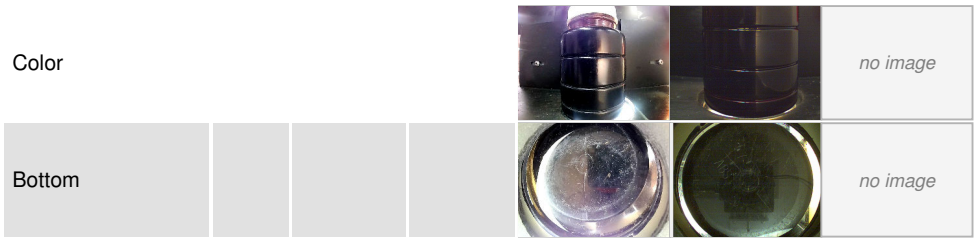

GRAPHS

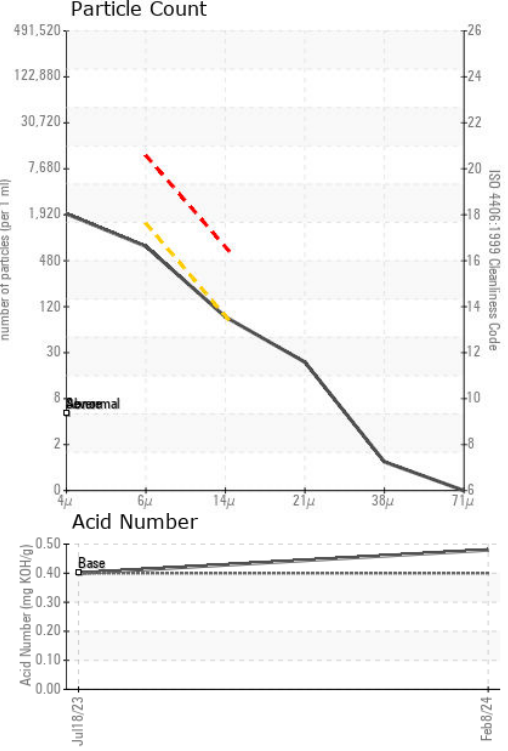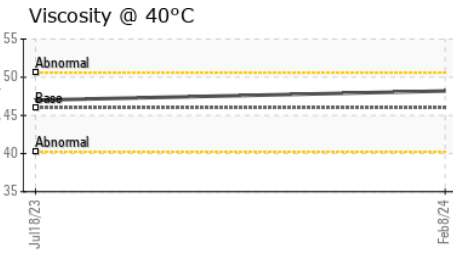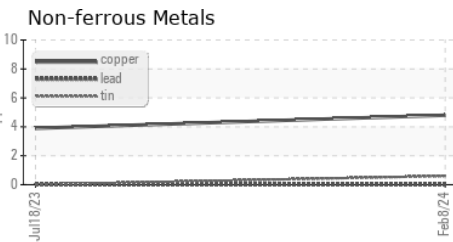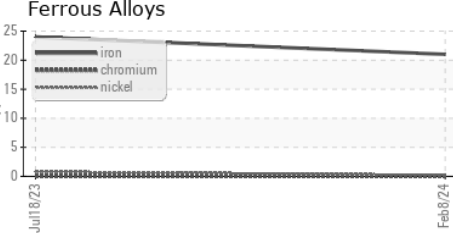

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCP36694 **Received** : 20 Mar 2024
Lab Number : 06123639 **Tested** : 25 Mar 2024
Unique Number : 10937790 **Diagnosed** : 25 Mar 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

CARLSON COMPOSITS
 1861 ELECTRONICS DR
 ANNISTON, AL
 US 36207
 Contact: K LEDBETTER
 KLEDBETTER@CARTAIRCOMPOSITES.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)