

OIL ANALYSIS REPORT

KAESER BSD 50 2750347 (S/N 1039)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

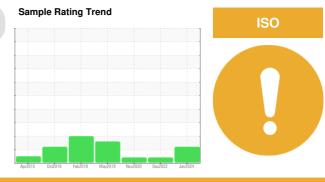

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA008586	KCP53375	KCP34060
Sample Date		Client Info		11 Jan 2024	09 Dec 2022	19 Nov 2020
Machine Age	hrs	Client Info		33296	32367	26875
Oil Age	hrs	Client Info		0	2063	3545
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		0	0	<1
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m		9	5	11
Tin		ASTM D5185m		9 <1	0	0
	ppm		>10	<1		0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	11
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	10	27	42
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	8	2
Zinc	ppm	ASTM D5185m		36	41	54
Sulfur	ppm	ASTM D5185m		23098	24218	17153
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	0
Sodium	ppm	ASTM D5185m		2	4	10
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water	%	ASTM D6304	>0.05	0.007	0.021	0.014
ppm Water	ppm	ASTM D6304		73	212.9	146.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7342		
Particles >6µm		ASTM D7647	>1300	979		
Particles >14µm		ASTM D7647	>80	88		
Particles >21µm		ASTM D7647	>20	25		
Particles >38µm		ASTM D7647	>4	2		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	0 20/17/14		
	TION			<u> </u>		
FLUID DEGRADA	ATION -	method	limit/base	current	history1	history2
A stal bloosel (Abt)		AOTH DOOK	0.4	0.44	0.00	0.000

Acid Number (AN) mg KOH/g AST

mg KOH/g ASTM D8045 0.4

0.44 0.36 0.389

Report Id: WILALB [WUSCAR] 06123656 (Generated: 03/25/2024 09:49:37) Rev: 1

Contact/Location: JOEL MILLER - WILALB



> 0.50 (B)0.40-HOX Ê0.30

Water (ppm)

OIL ANALYSIS REPORT

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

NONE

NONE

NONE

NONE

NONE

NONE

Particle Trend	VISUAL
Ξ 80k	White MetalscalarYellow Metalscalar
E 80k 19 60k 0 14μm 14μm 14μm 10 14μm 10 10 10	Precipitate scalar Silt scalar
20k	Debris scalar
4pr20/15 5d28/16 feb5/18 feb5/18 feb5/18 feb5/18	Sand/Dirt scalar Appearance scalar
Apr20/15 0ct28/16 Feb.6/18 May29/19 Nov/19/20 Dec3/22	Odor scalar
Water (KF)	Emulsified Water scalar Free Water scalar
10000 - Gevere	FLUID PROPERTIES
0000	Visc @ 40°C cSt
[№] 4000	SAMPLE IMAGES
0 Abnormal	tolor
Acid Number	Bottom



NONE

MODER

NONE

NONE


NONE

NONE

NONE

A MODER

NONE

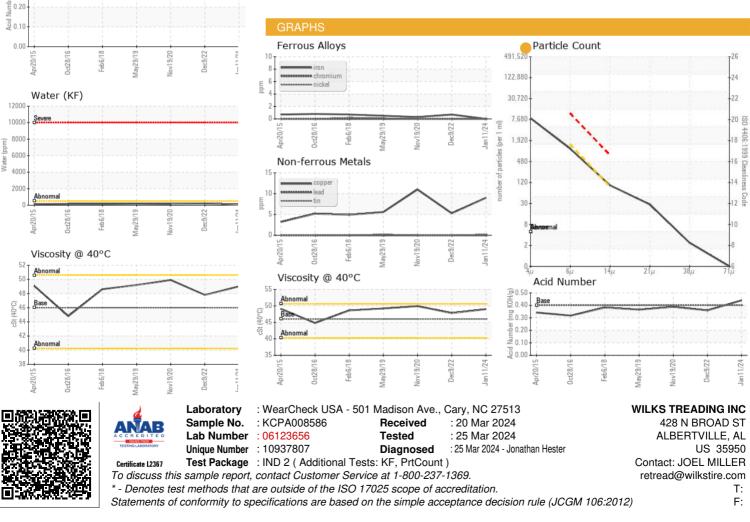

Contact/Location: JOEL MILLER - WILALB