

## **OIL ANALYSIS REPORT**





KAESER SX 5 6957769 (S/N 1149)

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Mar2024		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013012		
Sample Date		Client Info		13 Mar 2024		
Machine Age	hrs	Client Info		623		
Oil Age	hrs	Client Info		199		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	1		
Tin	ppm	ASTM D5185m	>10	۔ <1		
Vanadium	ppm	ASTM D5185m	-	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	2		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	35		
Calcium	ppm	ASTM D5185m	0	<1		
Phosphorus	ppm	ASTM D5185m	0	0		
Zinc	ppm	ASTM D5185m	0	24		
Sulfur	ppm	ASTM D5185m	23500	21894		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		13		
Potassium	ppm	ASTM D5185m	>20	11		
Water	%	ASTM D6304	>0.05	<b></b> 0.092		
ppm Water	ppm	ASTM D6304	>500	<mark>/</mark> 920		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15399		
Partialas - Curr		ASTM D7647	>1300	<u> </u>		
ranicies >oµm		ASTM D7647	>80	<b>A</b> 179		
			× 20	<b>A</b> 34		
Particles >14µm		ASTM D7647	>20	- 34		
Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647	>20 >4	3 3		
Particles >14μm Particles >21μm Particles >38μm			>4			
Particles >14μm Particles >21μm Particles >38μm Particles >71μm		ASTM D7647	>4	3		
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness FLUID DEGRADA		ASTM D7647 ASTM D7647	>4 >3	3 0		



# **OIL ANALYSIS REPORT**

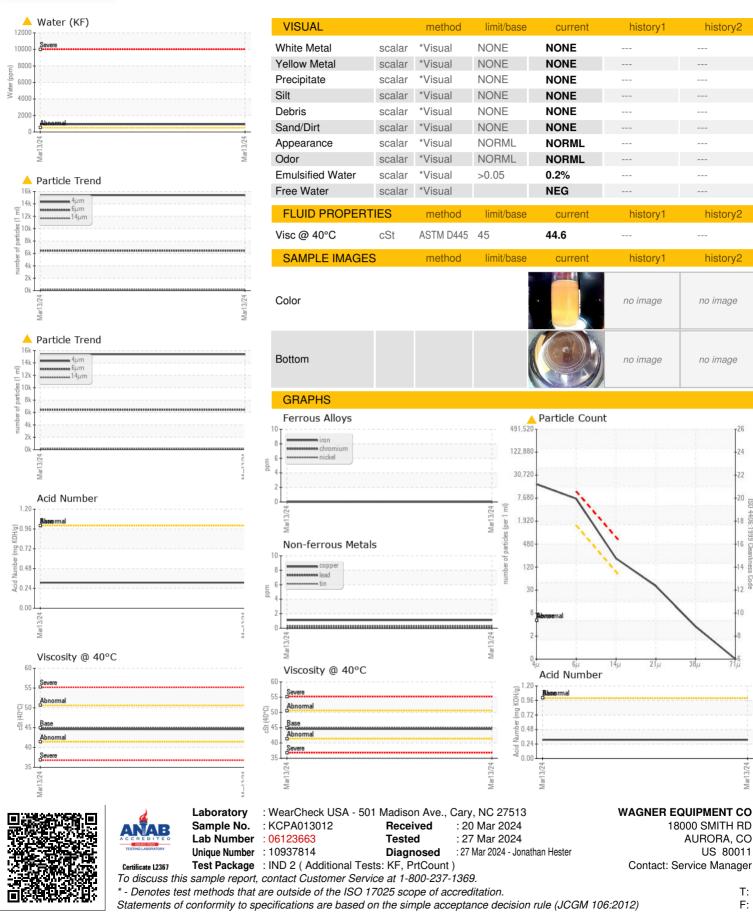

4406

:1999 Cle

14

3/24

T:

F: