

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



[] WC-9800C-0103-5 Chiller #3

Component Chiller

YORK TYPE K (--- GAL)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Mar2023 Aug2023 Mar2024						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0836547	WC0836530	WC0784768
Sample Date		Client Info		18 Mar 2024	13 Aug 2023	28 Mar 2023
Machine Age	hrs	Client Info		27420	26826	25878
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<1	2	2
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	<1
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0	<1
Magnesium	ppm	ASTM D5185m	0	0	3	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	5	0	1	4
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	10	0	17	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5	6	6
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	2
Water	%	ASTM D6304	>0.03	0.023	0.057	0.037
ppm Water	ppm	ASTM D6304	>300	234	571.2	374.7
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
A	1/0111	AOTH DOC :-	0.00	0.044	0.045	0.045

0.014

mg KOH/g ASTM D8045 0.03


Acid Number (AN)


0.015


0.015



OIL ANALYSIS REPORT

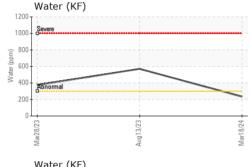






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2

Visc @ 40°C	cSt	ASTM D445	32.0	28.9	29.5	33.43


Color



SAMPLE IMAGES





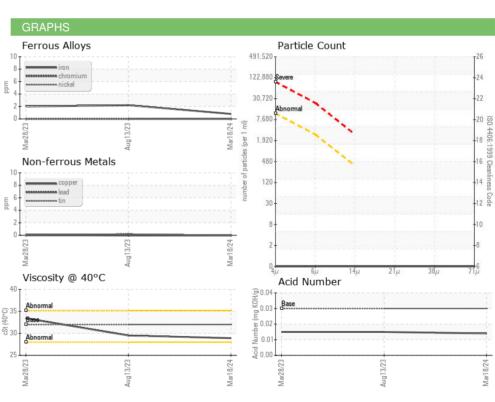





Laboratory Sample No. Unique Number: 10937883

: WC0836547 Lab Number : 06123732

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Diagnosed

: 20 Mar 2024 : 21 Mar 2024 : 25 Mar 2024 - Jonathan Hester

Chugach Consolidated Solutions - NSA 10840 Guilford Road, Suites 406-407

Annapolis Junction, MD US 20701

Test Package : PLANT Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: Susan Nord susan.nord@chugachgov.com T: (301)688-6363

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (443)479-5666