OIL ANALYSIS REPORT

Sample Rating Trend

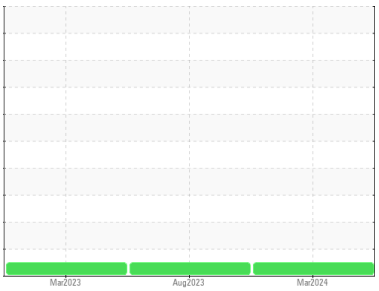

NORMAL

Machine Id
[] WC-9800C-0105-5 Chiller #5
Component
Chiller
Fluid
YORK TYPE K (--- GAL)

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0836545**	WC0836532	WC0784770
Sample Date		Client Info		**18 Mar 2024**	13 Aug 2023	28 Mar 2023
Machine Age	hrs	Client Info		**27576**	26684	25978
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	**0**	0	0
Chromium	ppm	ASTM D5185m	>2	**0**	0	0
Nickel	ppm	ASTM D5185m		**0**	0	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m	>2	**0**	0	0
Aluminum	ppm	ASTM D5185m	>3	**0**	0	0
Lead	ppm	ASTM D5185m	>2	**0**	0	0
Copper	ppm	ASTM D5185m	>8	**0**	0	0
Tin	ppm	ASTM D5185m	>4	**0**	<1	<1
Vanadium	ppm	ASTM D5185m		**0**	<1	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	**0**	0	0
Barium	ppm	ASTM D5185m	0	**0**	0	0
Molybdenum	ppm	ASTM D5185m	0	**0**	0	<1
Manganese	ppm	ASTM D5185m	0	**0**	0	<1
Magnesium	ppm	ASTM D5185m	0	**0**	3	0
Calcium	ppm	ASTM D5185m	0	**0**	0	0
Phosphorus	ppm	ASTM D5185m	5	**0**	2	4
Zinc	ppm	ASTM D5185m	0	**0**	0	0
Sulfur	ppm	ASTM D5185m	10	**0**	4	0

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**5**	7	7
Sodium	ppm	ASTM D5185m		**0**	0	0
Potassium	ppm	ASTM D5185m	>20	**0**	<1	1
Water	%	ASTM D6304	>0.03	**0.015**	0.049	0.037
ppm Water	ppm	ASTM D6304	>300	**159**	497.6	374.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.03	**0.014**	0.014	0.015

OIL ANALYSIS REPORT

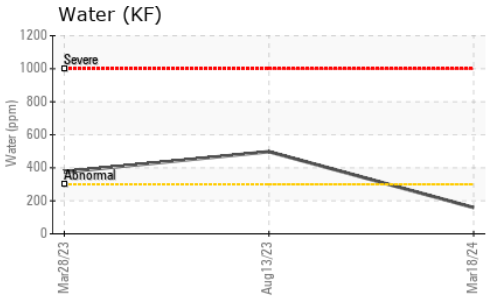

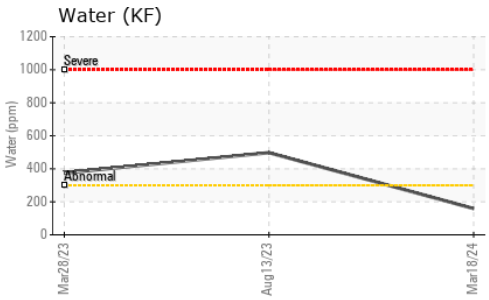

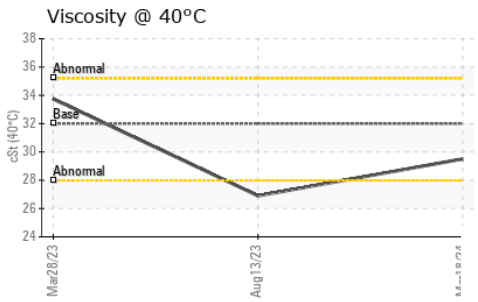

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.0	**29.5**	26.9	33.74

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

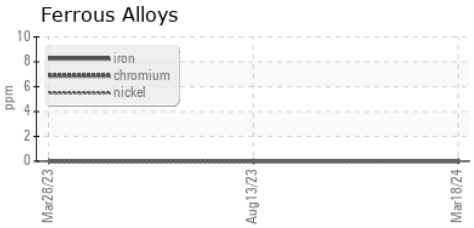

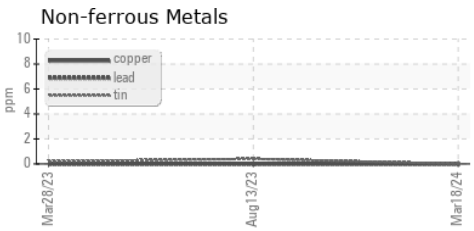

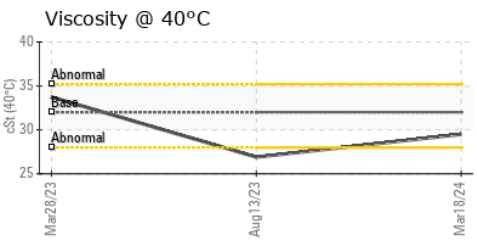

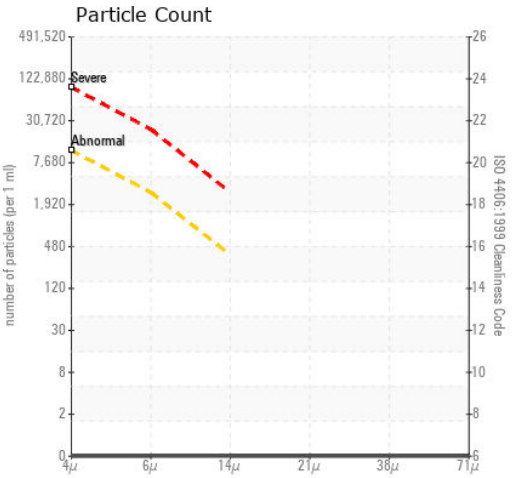

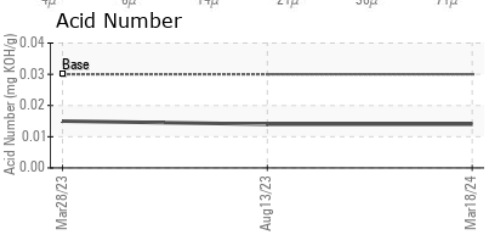

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836545
Lab Number : 06123736
Unique Number : 10937887
Test Package : PLANT

Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 25 Mar 2024 - Jonathan Hester

Chugach Consolidated Solutions - NSA
10840 Guilford Road, Suites 406-407
Annapolis Junction, MD
US 20701
Contact: Susan Nord
susan.nord@chugachgov.com
T: (301)688-6363
F: (443)479-5666

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)