




# OIL ANALYSIS REPORT

Sample Rating Trend

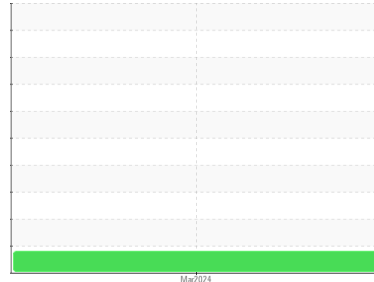

**WEAR**



Machine Id  
**KENWORTH 3957**

Component  
**Transmission**

Fluid  
**CHEVRON DELO SYNTHETIC GEAR 75W90 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

The fluid change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The iron level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0625657</b>	---	---
Sample Date	Client Info		<b>14 Mar 2024</b>	---	---
Machine Age	mls	Client Info	<b>316700</b>	---	---
Oil Age	mls	Client Info	<b>316700</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>▲ 241</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >50	<b>16</b>	---	---
Lead	ppm	ASTM D5185m >50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >200	<b>19</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>232</b>	---	---
Barium	ppm	ASTM D5185m	<b>33</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>3</b>	---	---
Manganese	ppm	ASTM D5185m	<b>37</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>13</b>	---	---
Calcium	ppm	ASTM D5185m	<b>89</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>912</b>	---	---
Zinc	ppm	ASTM D5185m	<b>40</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>882</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>18</b>	---	---
Sodium	ppm	ASTM D5185m	<b>66</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>17</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>LIGHT</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT

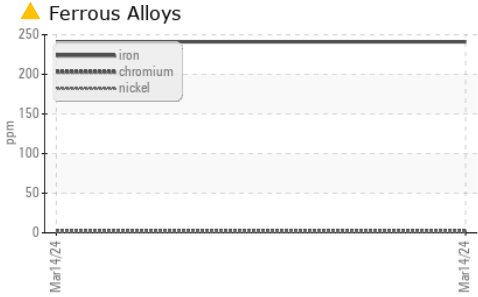


### FLUID PROPERTIES











FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 106	82.4	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

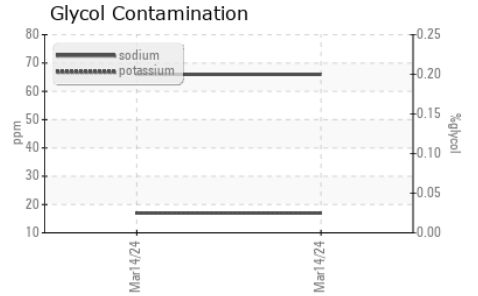

### GRAPHS

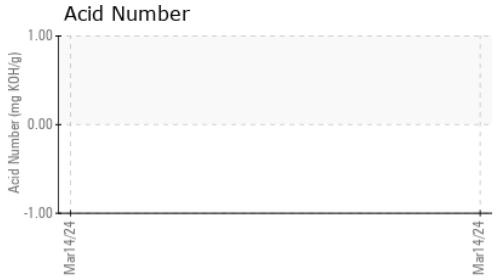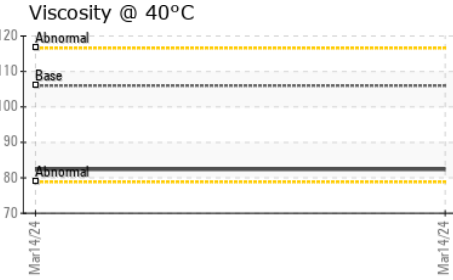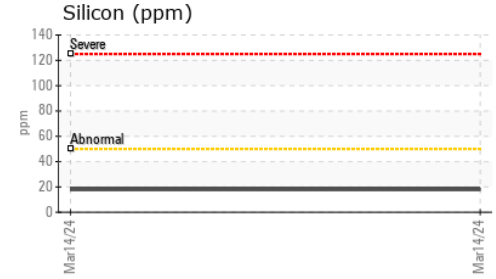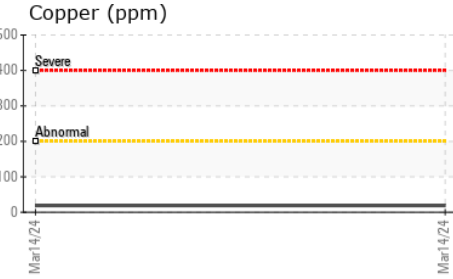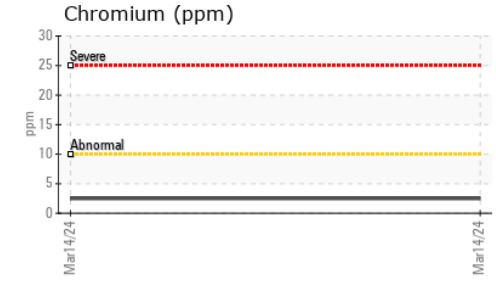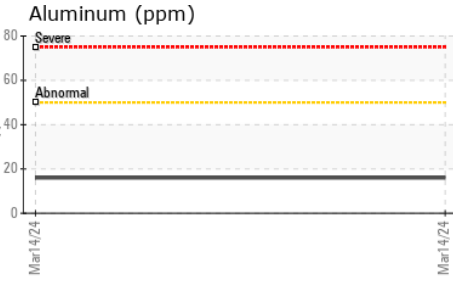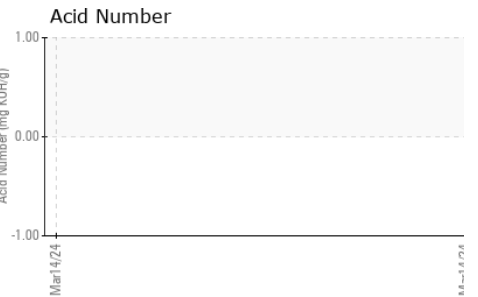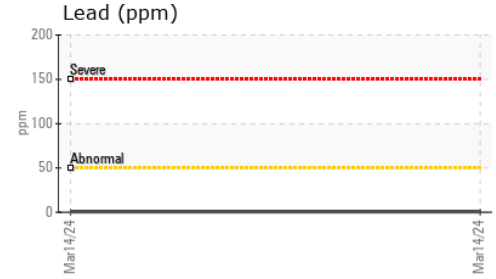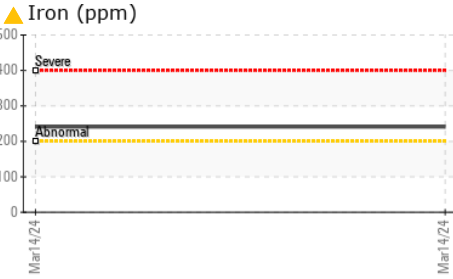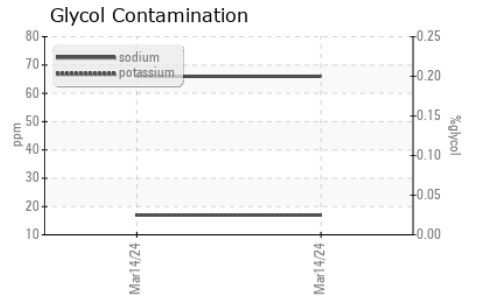

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0625657 **Received** : 20 Mar 2024  
**Lab Number** : 06124099 **Tested** : 23 Mar 2024  
**Unique Number** : 10938250 **Diagnosed** : 23 Mar 2024 - Don Baldrige  
**Test Package** : MOB1+ ( Additional Tests: Glycol, TAN Man )

**LTI/MILKY WAY - MOUNT VERNON**  
 3814 OLD HWY 99 S RD  
 MOUNT VERNON, WA  
 US 98273  
 Contact: JOHN VAN WINGERDEN  
 jvw@lynden.com  
 T: (360)354-2101  
 F: (360)354-3571

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)