

OIL ANALYSIS REPORT



WEAR





Area [W02008107] VOLVO EC380EL EQ0015044 (S/N 315735)

Rear Diesel Engine

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (14 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: W02008107)

Wear


The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

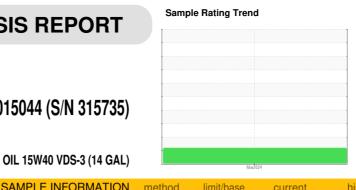

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0001068		
Sample Date		Client Info		19 Mar 2024		
Machine Age	hrs	Client Info		489		
Oil Age	hrs	Client Info		489		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	10		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	3		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>15	<u>▲</u> 342		
Tin	ppm	ASTM D5185m	>10	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2.5	50		
Barium	ppm	ASTM D5185m	0.0	0		
Molybdenum	ppm	ASTM D5185m	0.7	80		
Manganese	ppm	ASTM D5185m	0.0	2		
Magnesium	ppm	ASTM D5185m	256	60		
Calcium	ppm	ASTM D5185m	2057	2269		
Phosphorus	ppm	ASTM D5185m	935	974		
Zinc	ppm	ASTM D5185m	1223	1166		
Sulfur	ppm	ASTM D5185m	4079	4239		
CONTAMINANTS	i	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	28		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m		3		
Fuel	%	ASTM D3524	>6.0	1.3		
Glycol	%	*ASTM D2982		NEG		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1		
Nitration	Abs/cm	*ASTM D7624		10.0		
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8		
Base Number (BN)	mg KOH/g	ASTM D2896	10	5.2		



OIL ANALYSIS REPORT

