




# OIL ANALYSIS REPORT

Sample Rating Trend

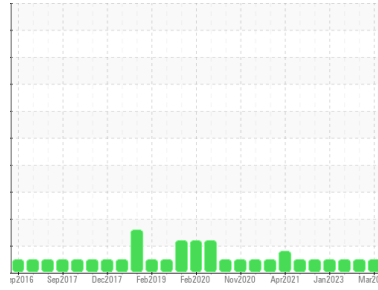

**NORMAL**



Area  
**K ROBERTSON - CRANE**  
 Machine Id  
**K ROBERTSON**

Component  
**Main Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (45 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0892621</b>	WC0374983	WC0791853
Sample Date	Client Info		<b>11 Mar 2024</b>	10 Feb 2024	26 Feb 2023
Machine Age	hrs	Client Info	<b>25025</b>	24640	1979
Oil Age	hrs	Client Info	<b>500</b>	500	1979
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>3</b>	6	7
Chromium	ppm	ASTM D5185m >8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>3</b>	3	3
Lead	ppm	ASTM D5185m >18	<b>2</b>	5	3
Copper	ppm	ASTM D5185m >80	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m >14	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 151	<b>309</b>	353	297
Barium	ppm	ASTM D5185m 0.4	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 250	<b>120</b>	125	133
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>657</b>	644	760
Calcium	ppm	ASTM D5185m 2046	<b>1525</b>	1473	1744
Phosphorus	ppm	ASTM D5185m 1043	<b>699</b>	728	802
Zinc	ppm	ASTM D5185m 943	<b>829</b>	859	997
Sulfur	ppm	ASTM D5185m 5012	<b>2792</b>	2701	3466

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	7	5
Sodium	ppm	ASTM D5185m >75	<b>1</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.8</b>	7.4	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.1</b>	23.1	24.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.7</b>	17.1	19.4
Base Number (BN)	mg KOH/g	ASTM D2896 12.5	<b>9.0</b>	8.5	9.3








# OIL ANALYSIS REPORT

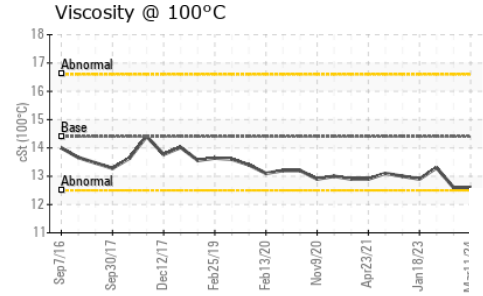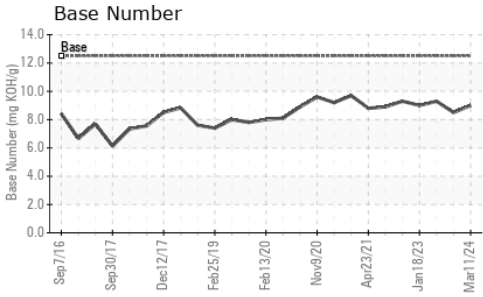

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.6</b>	12.6	13.3

## GRAPHS

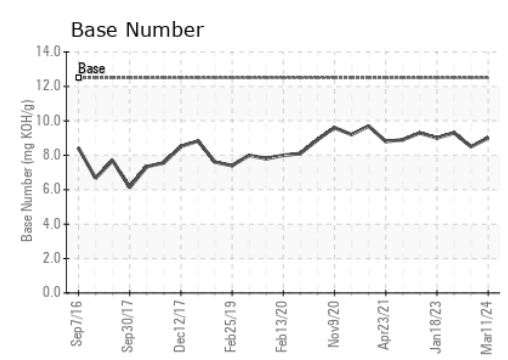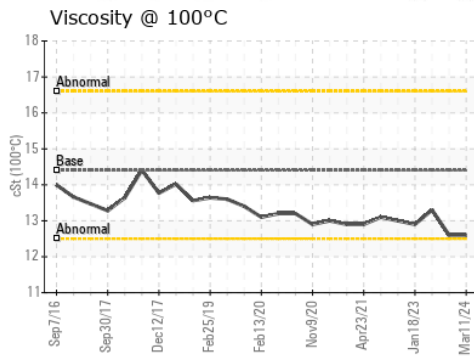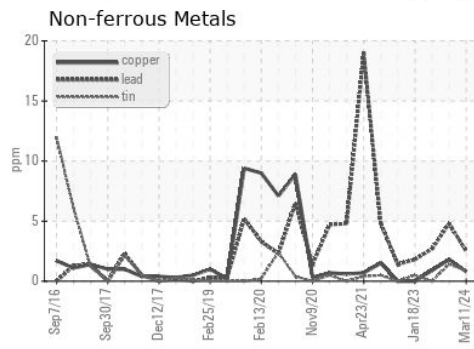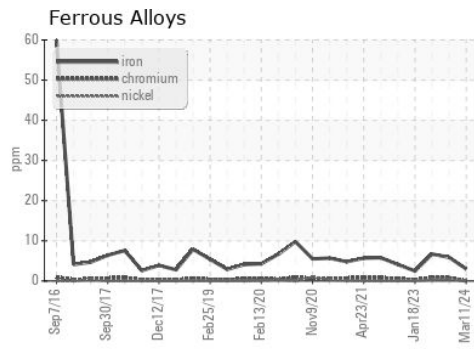

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0892621 **Received** : 20 Mar 2024  
**Lab Number** : **06124216** **Tested** : 21 Mar 2024  
**Unique Number** : 10938367 **Diagnosed** : 21 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**ASSOCIATED TERMINALS - CRANE**  
 CONVENT, LA  
 US 70723  
 Contact: GREG JOSEY  
 gjosey@associatedterminals.com  
 T:  
 F: (225)562-3515

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)