


OIL ANALYSIS REPORT

SAMPLE INFORMATION method

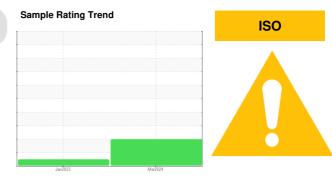

history1

history2

current

KAESER 8204598 (S/N 2136)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		method	IIIIIVDase	current	Thistory I	TIIStory2
Sample Number		Client Info		KCPA013471	KCP52752	
Sample Date		Client Info		01 Mar 2024	16 Jan 2023	
Machine Age	hrs	Client Info		11645	6726	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m		0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	<1	
Aluminum	ppm	ASTM D5185m	>10	0	<1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		2	9	
Tin	ppm	ASTM D5185m		0	<1	
Vanadium	ppm	ASTM D5185m	~10	0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
	ppin					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	0	6	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	2	42	
Calcium	ppm	ASTM D5185m	0	0	<1	
Phosphorus	ppm	ASTM D5185m	0	345	12	
Zinc	ppm	ASTM D5185m	0	0	18	
Sulfur	ppm	ASTM D5185m	23500	4567	16741	
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	
Sodium	ppm	ASTM D5185m		3	10	
Potassium	ppm	ASTM D5185m	>20	0	10	
Water	%	ASTM D6304	>0.05	0.003	0.011	
ppm Water	ppm	ASTM D6304	>500	29	112.6	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7665	4882	
Particles >6µm		ASTM D7647	>1300	🔺 2335	1181	
Particles >14µm		ASTM D7647	>80	<u> </u>	76	
Particles >21µm		ASTM D7647	>20	<u> </u>	18	
Particles >38µm		ASTM D7647	>4	<u> </u>	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 20/18/15	19/17/13	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.06	0.33	


limit/base





OIL ANALYSIS REPORT





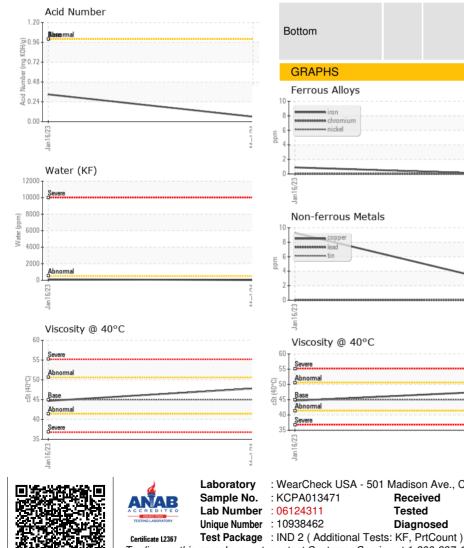

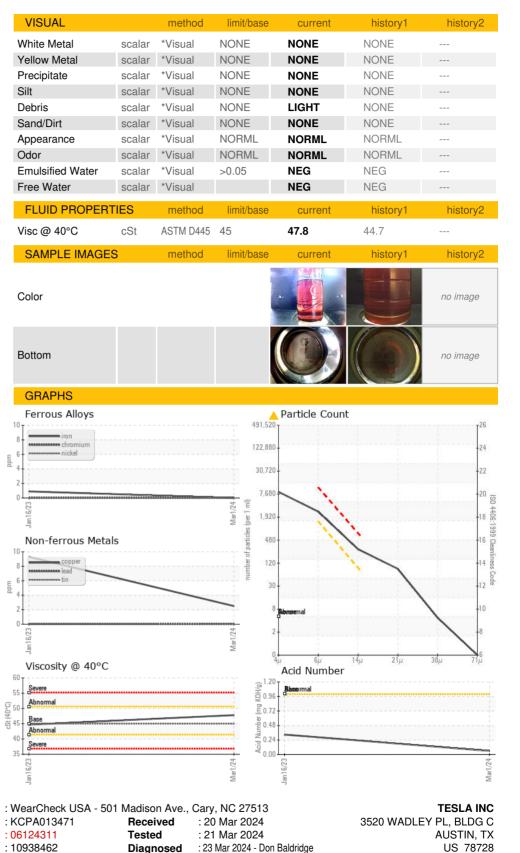



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

Contact: Service Manager