

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER 6851138

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Feb202	2 Jul2022	May2023 M	m2024	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA014934	KCP52416	KCP51975
Sample Date		Client Info		12 Mar 2024	05 May 2023	13 Jul 2022
Machine Age	hrs	Client Info		39685	32470	25825
Oil Age	hrs	Client Info		0	0	3000
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>50	5	3	5
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m	- 10			
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium		ASTM D5185m		0	0	<1
	ppm					
ADDITIVES		method	limit/base		history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	38	35	28
Calcium	ppm	ASTM D5185m	0	4	0	1
Phosphorus	ppm	ASTM D5185m	0	2	0	1
Zinc	ppm	ASTM D5185m	0	39	19	68
Sulfur	ppm	ASTM D5185m	23500	21956	20893	21904
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	2
Sodium	ppm	ASTM D5185m		10	10	8
Potassium	ppm	ASTM D5185m	>20	1	4	3
Water	%	ASTM D6304	>0.05	0.017	0.015	0.014
ppm Water	ppm	ASTM D6304	>500	170	153.7	143.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		683	790	1128
Particles >6µm		ASTM D7647	>1300	216	181	272
Particles >14µm		ASTM D7647	>80	18	18	18
Particles >21µm		ASTM D7647		6	5	5
Particles >38µm		ASTM D7647	>4	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	0 17/15/11	17/15/11	17/15/11
FLUID DEGRADA		method	limit/base		history1	history2
	mg KOH/g	ASTM D8045	1.0	0.43	0.37	0.43
Acid Number (AN) :50:50) Rev: 1	iiiy r∖∪⊓/ý	70 HVI D0040	1.0			
	Contact/Location: Service Manager - NEXSAN					


Report Id: NEXSAN [WUSCAR] 06124323 (Generated: 03/23/2024 12:50:50) Rev: 1




OIL ANALYSIS REPORT

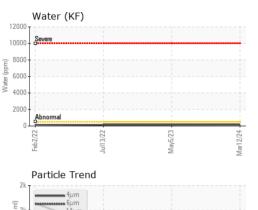



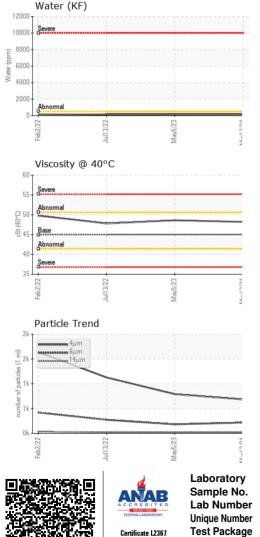

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.2	48.6	47.8
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

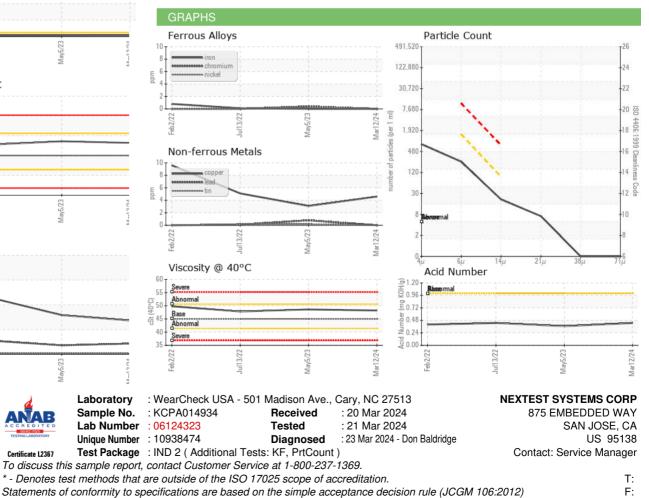

Contact/Location: Service Manager - NEXSAN